



# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Optically enhanced VERSatile fixture with narrow grazing properties ranging from 12° to 36°
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Durable anodized aluminum housings with integrated metal endcaps
- With an internal White Optics coating, the fixture achieves greater lumen output
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: VERS-04-WD-6.0-19/30-DRY-GZR-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E


<b>1</b> <b>PRODUCT</b>  <b>VERS-04-WD</b>  LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  6.0 6.0W/ft	<b>3</b> <b>CCT</b>  19/27 1900K/2700K 19/30 1900K/3000K	<b>4</b> <b>RATED</b>  DRY IP20 WET IP67  Can be suitable for exterior use, contact factory for more information	<b>5</b> <b>LENS</b>  25D GZR Optical 25° Grazer  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
<b>VERS-04-DW</b> <b>VERS-04-DW-USA</b>  Select USA option for BAA and BABA projects. Only DRY, PENC, or WET ratings apply.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible supplies.	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE	20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K			
	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	24/30 2400K/3000K 27/40 2700K/4000K	DRY IP20		
	1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	DMP PENC IP54 IP67 PENC-partially encapsulated: N/A for TBC clips		
			WET IP67  Can be suitable for exterior use, contact factory for more information		
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed  P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW CON6 Bare Wire (Standard 36") Connector 6" CON24 Connector 24"  BW CON6 Bare Wire (Standard 36") Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW CON6 Bare Wire (Standard 36") Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom  White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

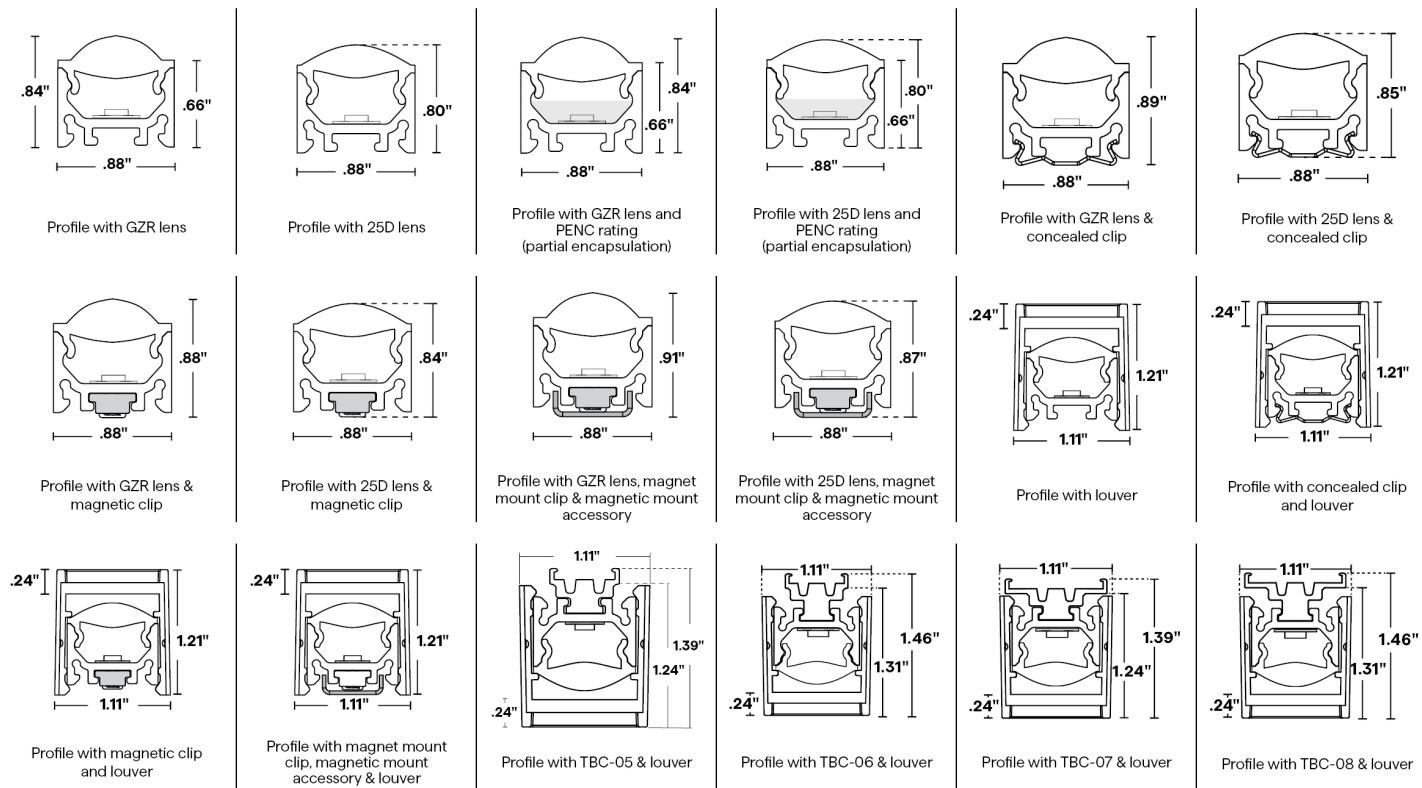

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VERS-04-WD-\*\*-30-DRY

[Calculated L70 = 70000 hrs]  
Tested with VERS-04-DW-\*\*-30-DRY

	6.0 W/FT	
	LM/FT	CRI
GZR	502	97
25D	485	97

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
GZR	169	98	266	98	411	98
25D	162	98	256	98	385	98



# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 5 DIODE VISIBILITY





Optical lens



GZER - Grazer lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

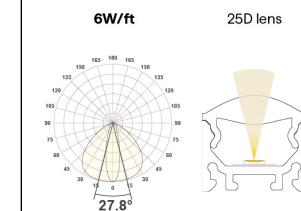



## TEMPERATURE RATINGS


		DW 1.5 HE W/FT						DW 2.5 HE W/FT						DW 4.0 HE W/FT					
		WD 6.0 W/FT		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply					
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F				
DMP	Ambient Operating Temp - Surface	—	—	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—				
WET	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—				
PENC	Ambient Operating Temp - Surface	—	—	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	—	—	—	—				

## 6 EXTERNAL LOUVER

### PLASTIC

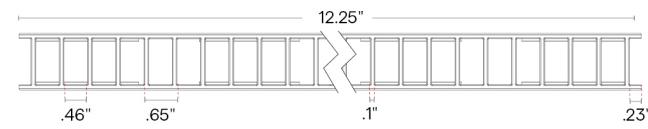



Lumen Multiplier  
WH BK




Profile with plastic louver

0.71 0.48

### METAL

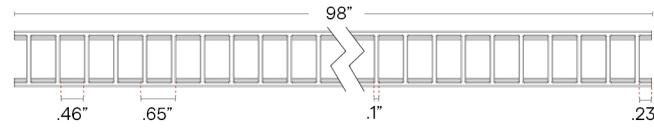

Lumen Multiplier  
WH BK ST



Profile with metal louver




# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT








SINGLE (Input only)

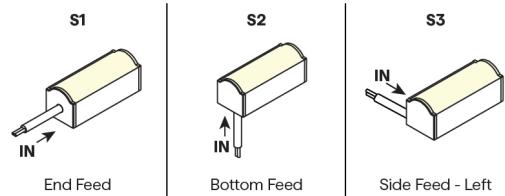

PASS THROUGH (Input/Output)


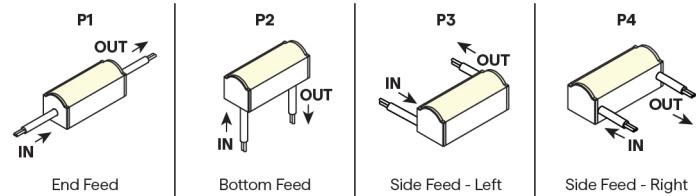


## CONFIGURATION OPTIONS

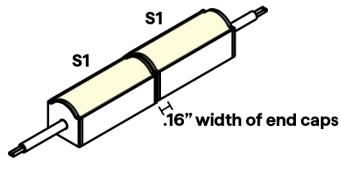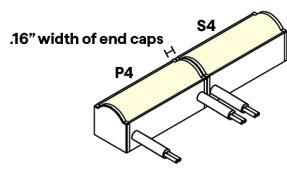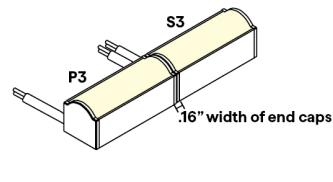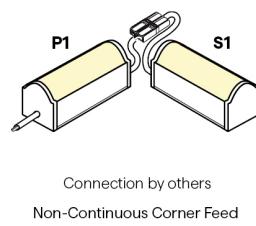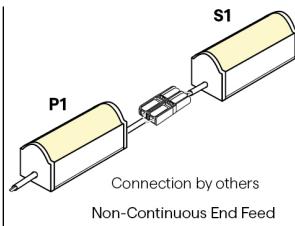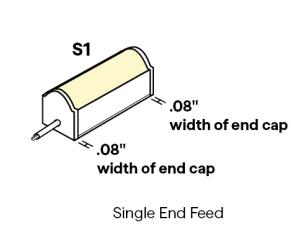

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



## 10 WIRE COLOR



White










Black



# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING

 <p><b>CC (CC-01)</b></p> <p><b>Concealed Clip</b></p> <p>Required if L1 or L2 Louver is selected</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clip comes with a #4 x 5/8" Flat Head screw.</p>	 <p><b>CC (CC-02)</b></p> <p><b>Louver Concealed Clip</b></p> <p>Required if L1 or L2 Louver is selected</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clip comes with a #4 x 5/8" Flat Head screw.</p>	 <p><b>MG</b></p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p>	 <p><b>MMA-02</b></p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p>	 <p><b>TBC-03</b></p> <p>Use on 9/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-03</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>
 <p><b>TBC-04</b></p> <p><b>Plastic T-Bar Clip</b></p> <p>Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-05</b></p> <p><b>Plastic T-Bar Clip</b></p> <p>Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-06</b></p> <p><b>Plastic T-Bar Clip</b></p> <p>Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-07</b></p> <p><b>Plastic T-Bar Clip</b></p> <p>Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-08</b></p> <p><b>Plastic T-Bar Clip</b></p> <p>Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>

## 13 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory




# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

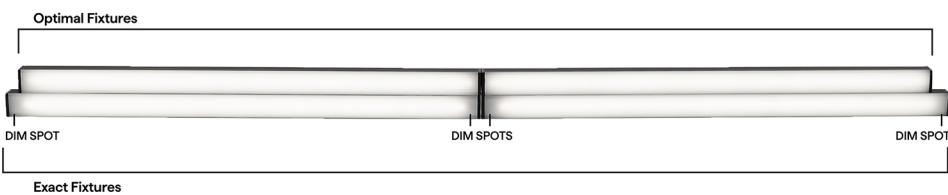

## WD DRY LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	



# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## WD WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.69"		10.84"		10.59"		10.69"	
13"	12.69"		12.84"		12.59"		12.69"	
14"	12.69"		12.84"		12.59"		12.69"	
15"	14.69"		14.84"		14.59"		14.69"	
16"	14.69"		14.84"		14.59"		14.69"	
17"	16.69"		16.84"		16.59"		16.69"	
18"	16.69"		16.84"		16.59"		16.69"	
19"	18.69"		18.84"		18.59"		18.69"	
20"	18.69"		18.84"		18.59"		18.69"	
21"	20.69"		20.84"		20.59"		20.69"	
22"	20.69"		20.84"		20.59"		20.69"	
23"	22.69"		22.84"		22.59"		22.69"	
24"	22.69"		22.84"		22.59"		22.69"	
36"	34.69"		34.84"		34.59"		34.69"	
48"	46.69"		46.84"		46.59"		46.69"	
60"	58.69"		58.84"		58.59"		58.69"	
72"	70.69"		70.84"		70.59"		70.69"	
84"	82.69"		82.84"		82.59"		82.69"	
96"	94.69"		94.84"		94.59"		94.69"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		




# VERS-GRAZER (04) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX If using DW LED, wattage must be doubled		QZ-DMX		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES

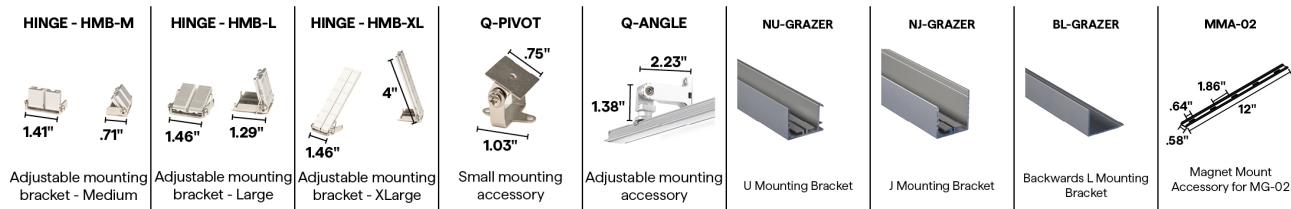

## COMPATIBLE WIRING ACCESSORIES

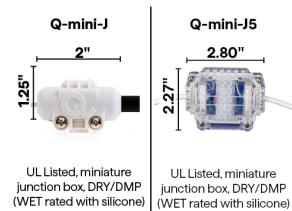



## VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage