





VERS-GRAZER (04) RGBW

24VDC Linear Fixtures - Surface & Recessed

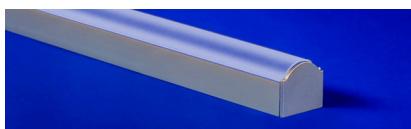

- Optically enhanced VERSatile fixture with narrow grazing properties ranging from 12° to 36°
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Features integrated metal endcaps
- Mounting options include a concealed clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
VERS-04-RGBW	6.0													

Sample Part Number: **VERS-04-RGBW-6.0-RGBW-30-DRY-GZR-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**


1 PRODUCT VERS-04-RGBW See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT 27 RGBW-2700K 30 RGBW-3000K	4 RATED DRY IP20 DMP IP54 PENC IP67 PENC-partially encapsulated; N/A for TBC clips	5 LENS 25D Optical 25° Grazer For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black	 BW : Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	 BW : Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.					
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory. Any white finish other than RAL 9003 must be custom ordered	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



VERS-GRAZER (04) RGBW

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

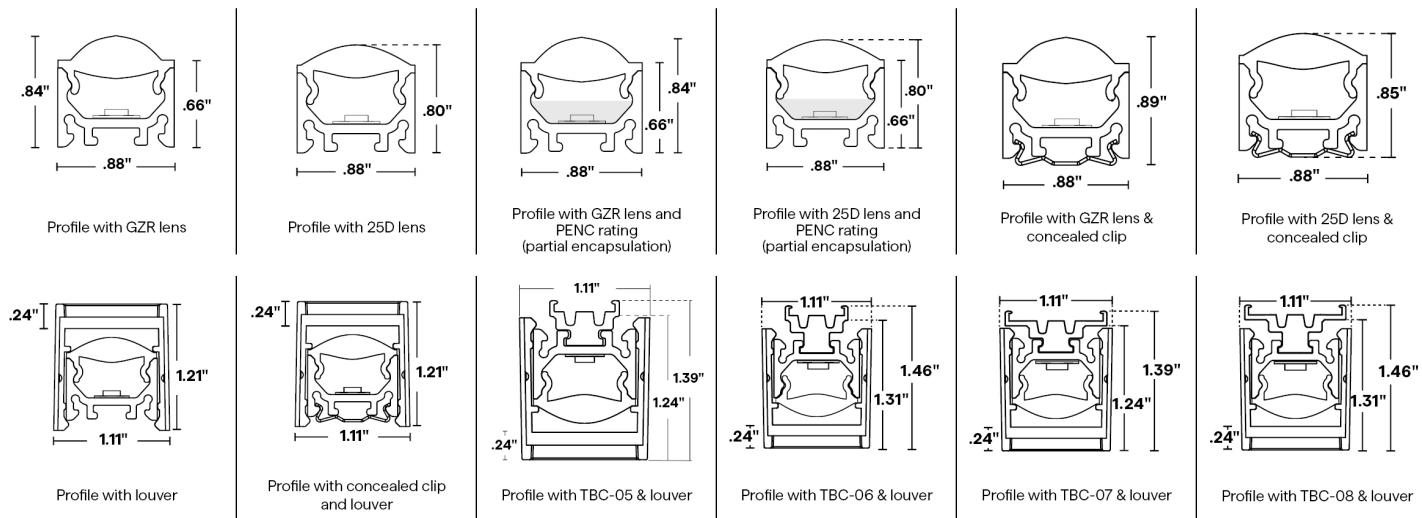

2 DELIVERED LUMENS

[Calculated L70 = 51000 hrs]
Tested with VERS-04-RGBW-**-**-DRY

	3000K		Red		Green		Blue	
	LM/FT	CRI	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
GZR	155	92	41	632	122	514	36	463
25D	146	93	39	631	108	514	33	464

5 DIODE VISIBILITY




Optical lens

GZR - Grazer lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

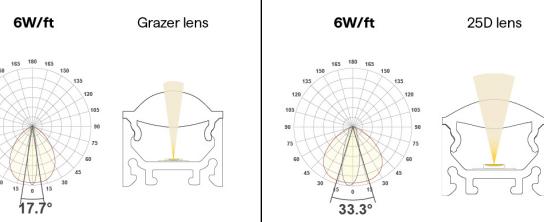



VERS-GRAZER (04) RGBW



24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F
DMP	Ambient Operating Temp - Surface	-4°F	110°F
PENC	Ambient Operating Temp - Surface	-4°F	95°F

6 EXTERNAL LOUVER

PLASTIC


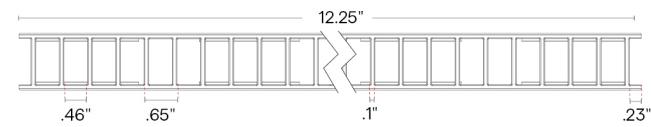


Lumen Multiplier
WH BK
0.71 0.48




Profile with plastic louver

METAL

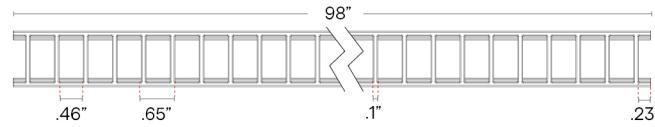


Lumen Multiplier
WH BK ST
0.72 0.53 0.68




Profile with metal louver

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

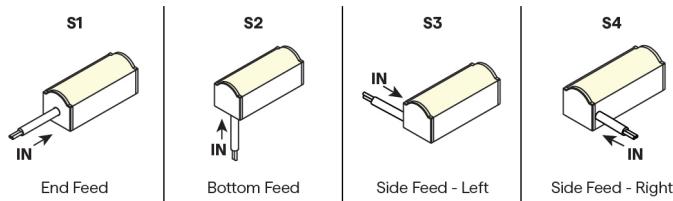

PASS THROUGH (Input/Output)

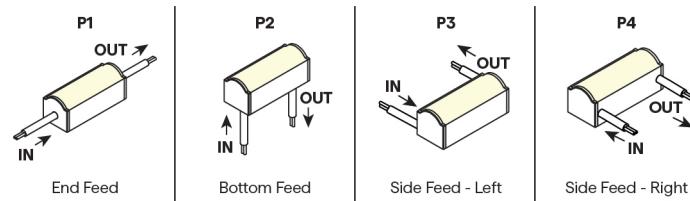




VERS-GRAZER (04) RGBW


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

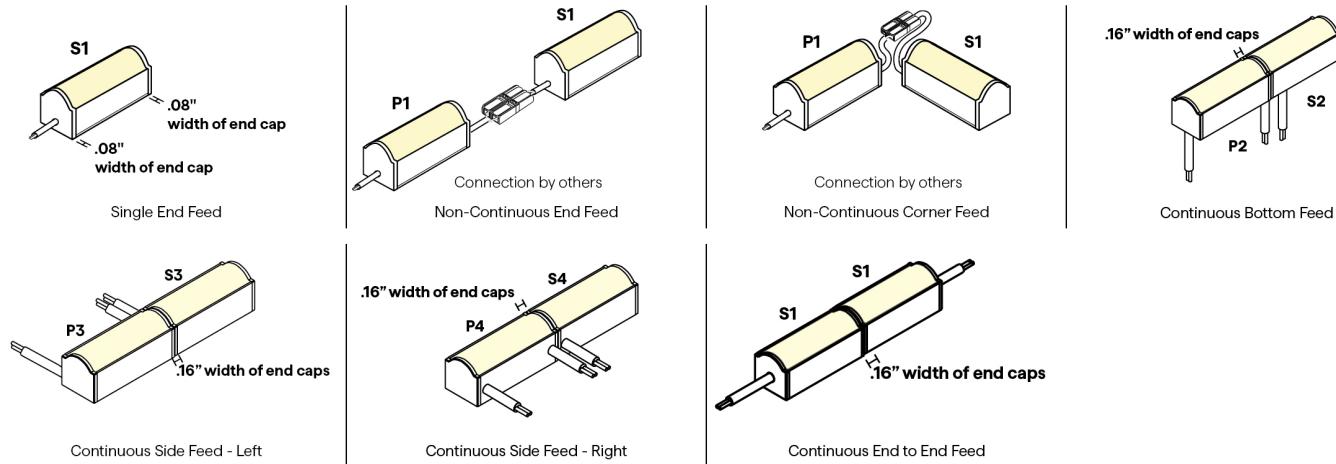

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

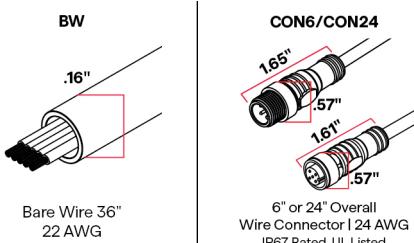

10 WIRE COLOR



12 MOUNTING




CC (CC-01)	CC (CC-02)	TBC-03	TBC-04	TBC-05
Concealed Clip	Louver Concealed Clip Required if L1 or L2 Louver is selected	Plastic T-Bar Clip	Plastic T-Bar Clip	Plastic T-Bar Clip
2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	Use on 9/16" Flat Drop Ceiling; not compatible with PENC	Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC	Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC
To order separately use CC-01 (sold in pairs)	To order separately use CC-02 (sold in pairs)	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.
Each clips comes with a #4 x 5/8" Flat Head screw.	Each clips comes with a #4 x 5/8" Flat Head screw.	To order separately use TBC-03	To order separately use TBC-04	To order separately use TBC-05
		Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key



VERS-GRAZER (04) RGBW

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

		
TBC-06 Plastic T-Bar Clip	TBC-07 Plastic T-Bar Clip	TBC-08 Plastic T-Bar Clip
<p>Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p>Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	<p>Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>

13 FINISH




Satin
Black
Bronze
White

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

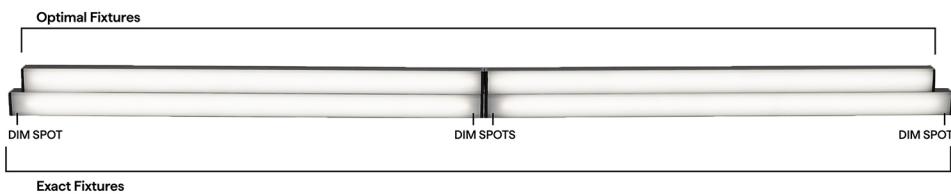



VERS-GRAZER (04) RGBW

24VDC Linear Fixtures - Surface & Recessed

RGBW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	S1 End Feed
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	8.59"		8.94"		8.49"		8.59"	
13"	12.59"		12.94"		12.49"		12.59"	
14"	12.59"		12.94"		12.49"		12.59"	
15"	12.59"		12.94"		12.49"		12.59"	
16"	12.59"		12.94"		12.49"		12.59"	
17"	16.59"		16.94"		16.49"		16.59"	
18"	16.59"		16.94"		16.49"		16.59"	
19"	16.59"		16.94"		16.49"		16.59"	
20"	16.59"		16.94"		16.49"		16.59"	
21"	20.59"		20.94"		20.49"		20.59"	
22"	20.59"		20.94"		20.49"		20.59"	
23"	20.59"		20.94"		20.49"		20.59"	
24"	20.59"		20.94"		20.49"		20.59"	
36"	32.59"		32.94"		32.49"		32.59"	
48"	44.59"		44.94"		44.49"		44.59"	
60"	56.59"		56.94"		56.49"		56.59"	
72"	68.59"		68.94"		68.49"		68.59"	
84"	80.59"		80.94"		80.49"		80.59"	
96"	92.59"		92.94"		92.49"		92.59"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	




VERS-GRAZER (04) RGBW

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	NU-GRAZER	NJ-GRAZER	BL-GRAZER
1.41" 1.41" 1.41"	1.46" 1.46" 1.46"	1.29" 1.29" 1.46"	4" 1.46" 1.03"	75° 2.23" 1.38"	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage