



VERS-GRAZER (04) STATIC

WHITE

24VDC Linear Fixtures - Surface & Recessed



- Optically enhanced VERSatile fixture with narrow grazing properties ranging from 12° to 36°
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: VERS-04-SW-5.0-30-DRY-GZR-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E


1 PRODUCT VERS-04-SW VERS-04-SW-USA Select USA option for BAA and BABA projects. Only DRY, PENC, or WET ratings apply. See following pages for compatible power supplies.	2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20 DMP IP54 PENC IP67 WET IP67 Can be suitable for exterior use, contact factory for more information	5 LENS 25D GZR Optical 25° Grazer For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	8 CONNECTOR/WIRE IN BW CON6 Bare Wire (Standard 36") Connector 6" CON24 Connector 24" BW CON6 Bare Wire (Standard 36") Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW CON6 Bare Wire (Standard 36") Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black		
When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

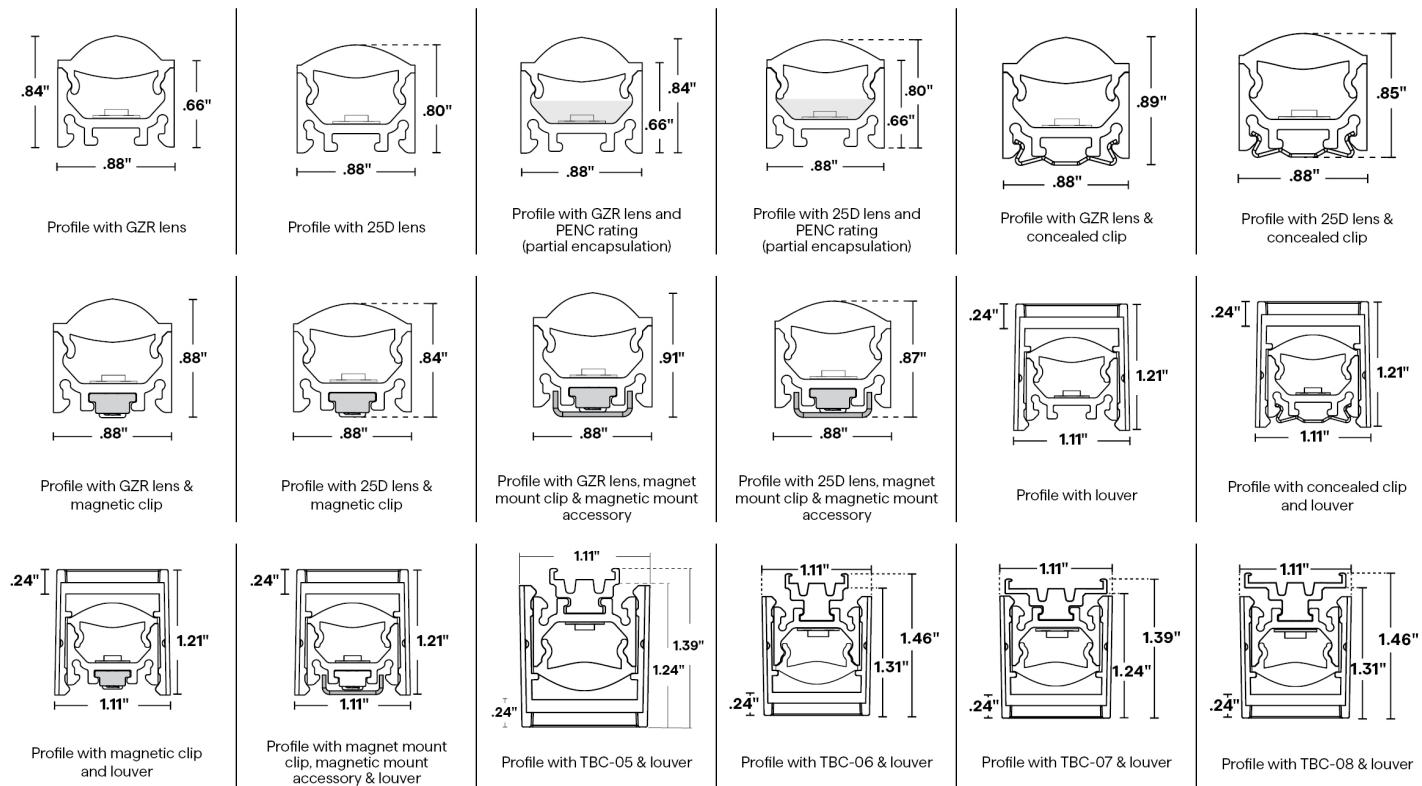


2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]

Tested with VERS-04-SW-**-30-DRY

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
GZR	169	98	216	98	294	98	404	97	372	98	449	98	751	98	1108	98
25D	162	98	184	98	281	98	359	97	344	98	422	98	704	98	994	98

5 DIODE VISIBILITY

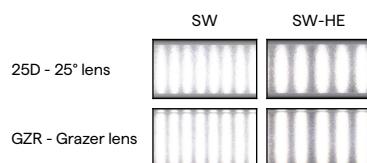




VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


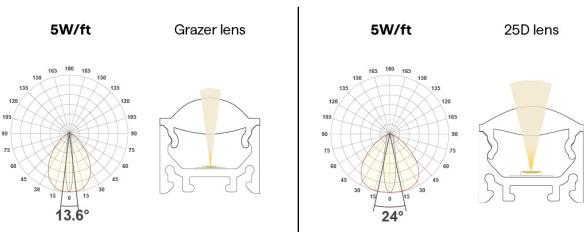


TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—
PENC	Ambient Operating Temp - Surface	-4°F	130°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F	-4°F	100°F	-4°F	100°F	—	—

6 EXTERNAL LOUVER

PLASTIC


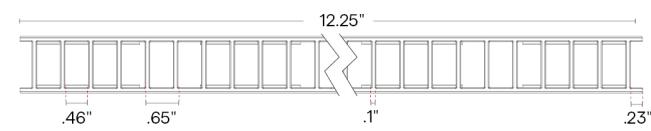


WH	BK
0.71	0.48




Profile with plastic louver

METAL

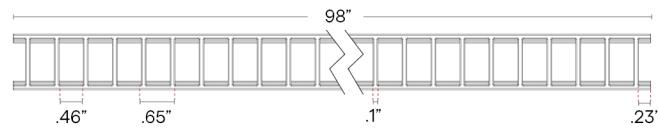

WH	BK	ST
0.72	0.53	0.68



Profile with metal louver




VERS-GRAZER (04) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

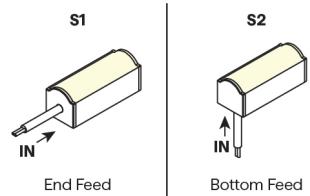


PASS THROUGH (Input/Output)

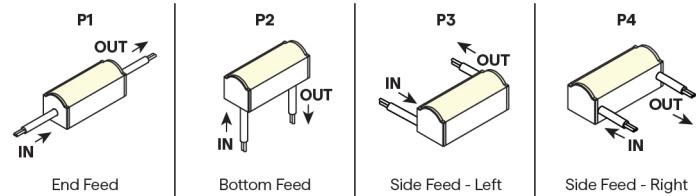


CONFIGURATION OPTIONS

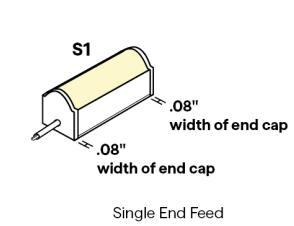


Single End Feed

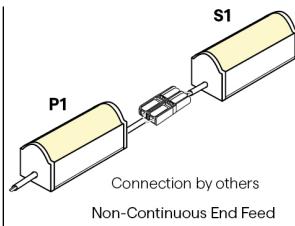


Connection by others
Non-Continuous End Feed

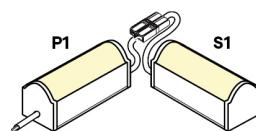


Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed

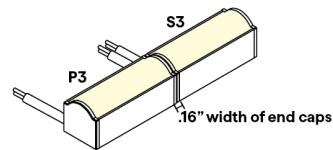

Continuous Side Feed - Left

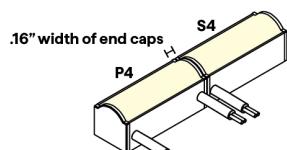


Continuous Side Feed - Right

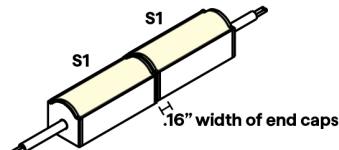

Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"
22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White










Black



VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

 <p>CC (CC-01)</p> <p>Concealed Clip</p> <p>.18"  1.25"  .7" </p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	 <p>CC (CC-02)</p> <p>Louver Concealed Clip Required if L1 or L2 Louver is selected</p> <p>.21"  1.25"  .7" </p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	 <p>MG</p> <p>Magnet Clip</p> <p>.35"  3.13"  .15" </p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p>	 <p>MMA-02</p> <p>Magnet Mount Accessory for MG-02</p> <p>.64"  1.86"  .58"  12" </p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p>	 <p>TBC-03</p> <p>Plastic T-Bar Clip</p> <p>.64"  .50"  .27" </p> <p>Use on 9/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-03</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>
 <p>TBC-04</p> <p>Plastic T-Bar Clip</p> <p>1.02"  .50"  .27" </p> <p>Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p>TBC-05</p> <p>Plastic T-Bar Clip</p> <p>.64"  .50"  .41" </p> <p>Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p>TBC-06</p> <p>Plastic T-Bar Clip</p> <p>.64"  .50"  .48" </p> <p>Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-06</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p>TBC-07</p> <p>Plastic T-Bar Clip</p> <p>1.02"  .50"  .47" </p> <p>Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-07</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p>TBC-08</p> <p>Plastic T-Bar Clip</p> <p>1.02"  .50"  .48" </p> <p>Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-08</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>

13 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory




VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

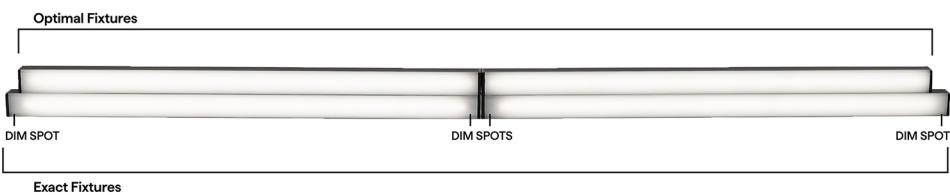

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	0.5"	
13"	0.5"	
14"	0.5"	
15"	0.5"	
16"	0.5"	
17"	0.5"	
18"	0.5"	
19"	0.5"	
20"	0.5"	
21"	0.5"	
22"	0.5"	
23"	0.5"	
24"	0.5"	
36"	0.5"	
48"	0.5"	
60"	0.5"	
72"	0.5"	
84"	0.5"	
96"	0.5"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	11.49"	11.74"	11.74"	11.34"	11.44"	11.44"	11.44"	11.44"
13"	12.49"	12.74"	12.74"	12.34"	12.44"	12.44"	12.44"	12.44"
14"	13.49"	13.74"	13.74"	13.34"	13.44"	13.44"	13.44"	13.44"
15"	14.49"	14.74"	14.74"	14.34"	14.44"	14.44"	14.44"	14.44"
16"	15.49"	15.74"	15.74"	15.34"	15.44"	15.44"	15.44"	15.44"
17"	16.49"	16.74"	16.74"	16.34"	16.44"	16.44"	16.44"	16.44"
18"	17.49"	17.74"	17.74"	17.34"	17.44"	17.44"	17.44"	17.44"
19"	18.49"	18.74"	18.74"	18.34"	18.44"	18.44"	18.44"	18.44"
20"	19.49"	19.74"	19.74"	19.34"	19.44"	19.44"	19.44"	19.44"
21"	20.49"	20.74"	20.74"	20.34"	20.44"	20.44"	20.44"	20.44"
22"	21.49"	21.74"	21.74"	21.34"	21.44"	21.44"	21.44"	21.44"
23"	22.49"	22.74"	22.74"	22.34"	22.44"	22.44"	22.44"	22.44"
24"	23.49"	23.74"	23.74"	23.34"	23.44"	23.44"	23.44"	23.44"
36"	35.49"	35.74"	35.74"	35.34"	35.44"	35.44"	35.44"	35.44"
48"	47.49"	47.74"	47.74"	47.34"	47.44"	47.44"	47.44"	47.44"
60"	59.49"	59.74"	59.74"	59.34"	59.44"	59.44"	59.44"	59.44"
72"	71.49"	71.74"	71.74"	71.34"	71.44"	71.44"	71.44"	71.44"
84"	83.49"	83.74"	83.74"	83.34"	83.44"	83.44"	83.44"	83.44"
96"	95.49"	95.74"	95.74"	95.34"	95.44"	95.44"	95.44"	95.44"



VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	11.64"		11.79"		11.54"		11.64"	
13"	12.64"		12.79"		12.54"		12.64"	
14"	13.64"		13.79"		13.54"		13.64"	
15"	14.64"		14.79"		14.54"		14.64"	
16"	15.64"		15.79"		15.54"		15.64"	
17"	16.64"		16.79"		16.54"		16.64"	
18"	17.64"		17.79"		17.54"		17.64"	
19"	18.64"		18.79"		18.54"		18.64"	
20"	19.64"		19.79"		19.54"		19.64"	
21"	20.64"		20.79"		20.54"		20.64"	
22"	21.64"		21.79"		21.54"		21.64"	
23"	22.64"		22.79"		22.54"		22.64"	
24"	23.64"		23.79"		23.54"		23.64"	
36"	35.64"		35.79"		35.54"		35.64"	
48"	47.64"		47.79"		47.54"		47.64"	
60"	59.64"		59.79"		59.54"		59.64"	
72"	71.64"		71.79"		71.54"		71.64"	
84"	83.64"		83.79"		83.54"		83.64"	
96"	95.64"		95.79"		95.54"		95.64"	

SW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	



VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	NU-GRAZER	NJ-GRAZER	BL-GRAZER	MMA-02
1.41" .71"	1.46" 1.29" 1.46"	4" 1.46"	.75" 1.03"	2.23" 1.38"	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	Magnet Mount Accessory for MG-02

Adjustable mounting bracket - Medium

Adjustable mounting bracket - Large

Adjustable mounting bracket - XLarge

Small mounting accessory

Adjustable mounting accessory

U Mounting Bracket

J Mounting Bracket

Backwards L Mounting Bracket

Magnet Mount Accessory for MG-02

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	CON120-EXT	CON FOUR-FER	CON M - BARREL F
2" 1.25"	2.80" 2.27"	10ft Con cable extender	Splits lead from one to four LED Con connectors	Male con to barrel cable adaptor

UL Listed, miniature junction box DRY/DMP (WET rated with silicone)

UL Listed, miniature junction box DRY/DMP (WET rated with silicone)

10ft Con cable extender DRY/DMP/WET

Splits lead from one to four LED Con connectors DRY/DMP/WET

Male con to barrel cable adaptor DRY/DMP



VERS-GRAZER (04) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage