




# VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

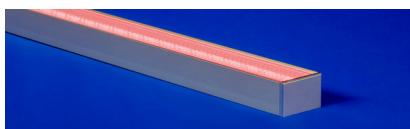

- A VERSatile fixture with customizable options to meet the specific needs of various applications
- The batwing and prismatic lens options offer glare-reducing illumination
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- QTL Red & Amber LED products are FCC certified, making them safe for turtles and other wildlife
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
VERS-08-SC	5.0													

Sample Part Number: VERS-08-SC-5.0-G-DRY-GC-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E


<b>1</b> <b>PRODUCT</b>  VERS-08-SC  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  5.0 5.0W/ft	<b>3</b> <b>CCT</b>  A Amber B Blue G Green R Red	<b>4</b> <b>RATED</b>  DRY IP20 DMP IP54 WET IP67  Can be suitable for exterior use, contact factory for more information	<b>5</b> <b>LENS</b>  BAT Batwing GC Glare Control  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed  P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black	When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom  White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory. Any white finish other than RAL 9003 must be custom ordered	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

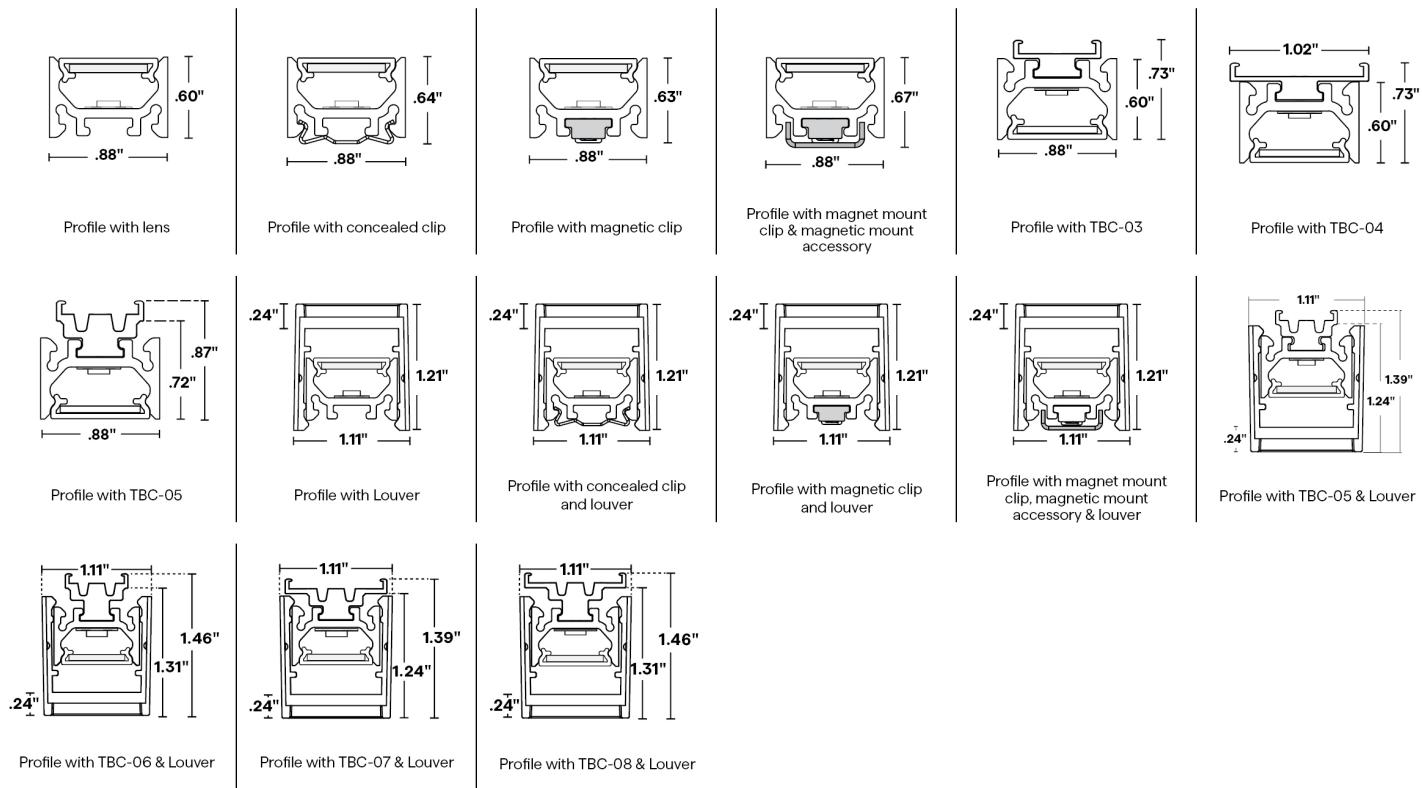

## 2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]  
Tested with VERS-08-SC-5.0-\*\*-DRY

	Red			Green			Blue			Amber		
	LM/FT	Wavelength	UGR									
BAT	90	635	N/A	455	520	N/A	97	466	N/A	72	595	N/A
GC	100	635	≤17.2	508	521	≤22.9	117	467	≤17.8	79	596	≤16.2

## 5 DIODE VISIBILITY




BAT - Batwing lens

GC - Glare Control lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

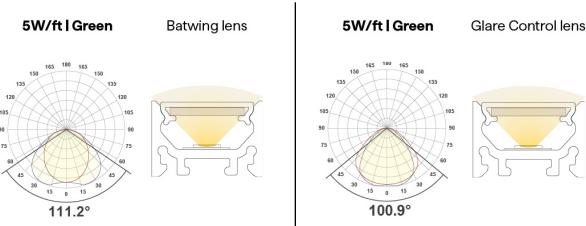



## VERS-INSERT (08) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

### TEMPERATURE RATINGS


		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F

### 6 EXTERNAL LOUVER

PLASTIC

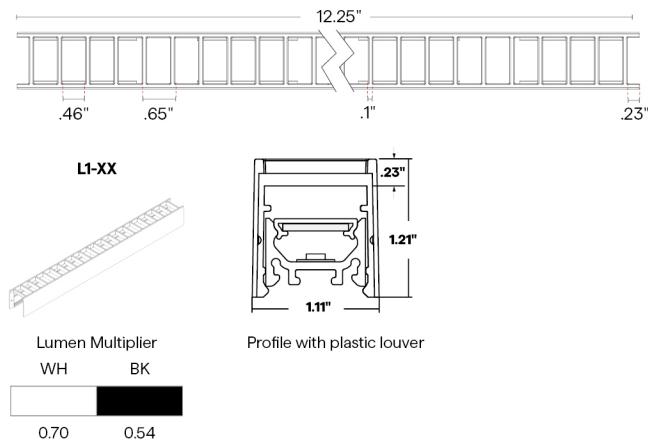


METAL

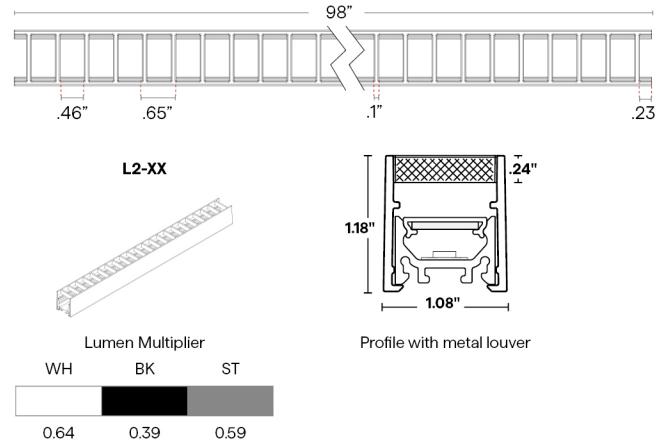


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

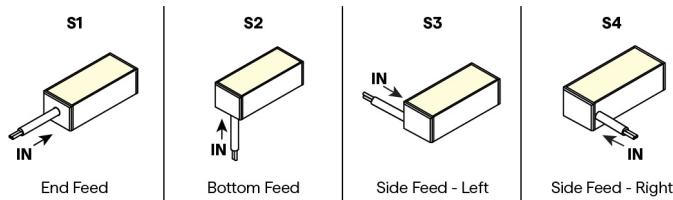

PASS THROUGH (Input/Output)

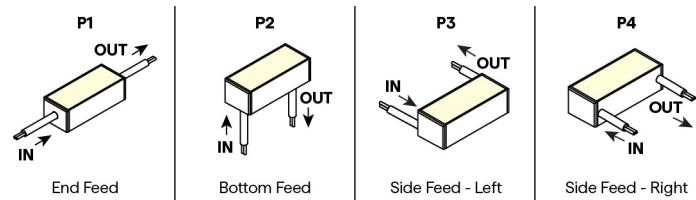




# VERS-INSERT (08) STATIC COLOR


24VDC Linear Fixtures - Surface & Recessed

## CONFIGURATION OPTIONS

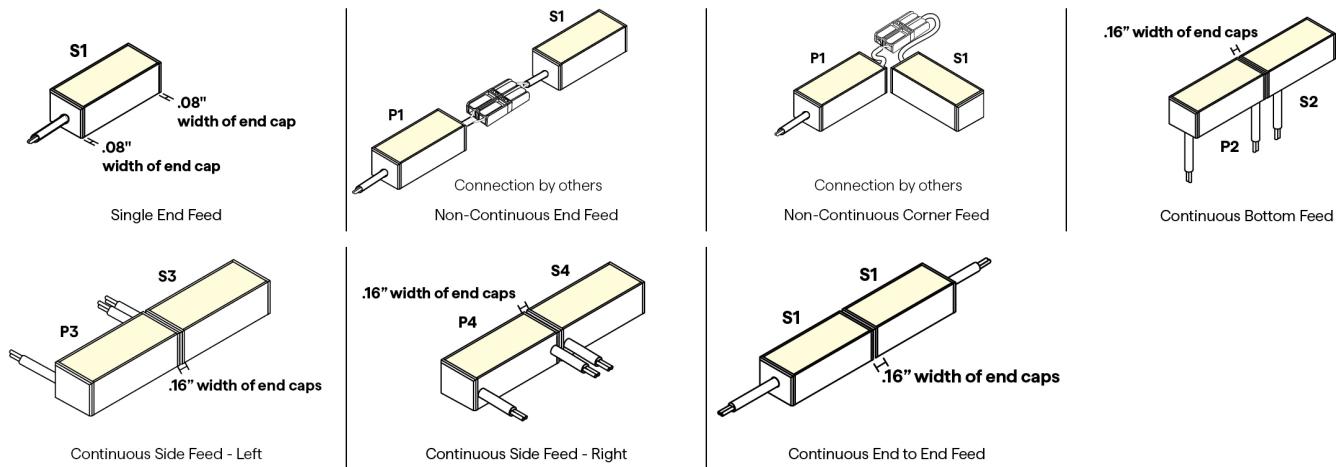

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

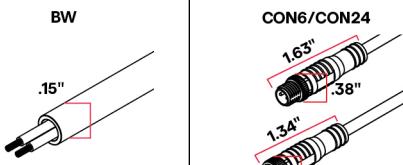

Bare Wire 36"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

## 10 WIRE COLOR



## 12 MOUNTING

<b>CC</b> (CC-01)	<b>CC</b> (CC-02)	<b>MG</b>	<b>MMA-02</b>	<b>TBC-03</b>
 Concealed Clip	 Louver Concealed Clip Required if L1 or L2 Louver is selected	 Magnet Clip	 Magnet Mount Accessory for MG-02 Sold separately, to order use MMA-02	 Plastic T-Bar Clip Use on 9/16" Flat Drop Ceiling
2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'  To order separately use CC-01 (sold in pairs)  Each clips comes with a #4 x 5/8" Flat Head screw.	2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'  To order separately use CC-02 (sold in pairs)  Each clips comes with a #4 x 5/8" Flat Head screw.	One MG provided per foot To order separately use MG-02	Each clip comes with a #6 Flat Screw  Required when mounting to a non-magnetic surface	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.  To order separately use TBC-03  Each pair of clips comes with M2.5 x 4mm set screw and Allen key



## VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

### MOUNTING CONTINUED

TBC-04	TBC-05	TBC-06	TBC-07	TBC-08
Plastic T-Bar Clip				
Use on 15/16" Flat or Tegular Drop Ceiling	Use on 9/16" Tegular Drop Ceiling	Use with Louver on 9/16" Tegular Drop Ceiling	Use with Louver on 15/16" Flat Drop Ceiling	Use with Louver on 15/16" Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.
To order separately use TBC-04	To order separately use TBC-05	To order separately use TBC-06	To order separately use TBC-07	To order separately use TBC-08
Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key


### 13 FINISH



Custom finishes require a longer lead time, consult factory

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

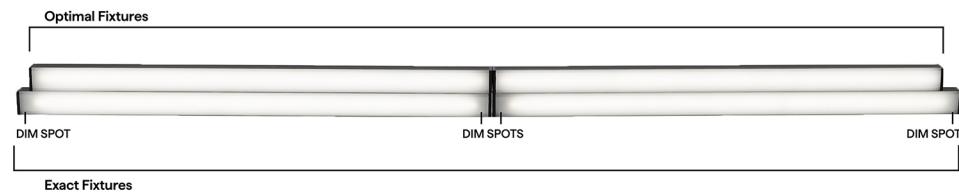



# VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

## SC DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	

## SC WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed	S3 Side Feed - Left	S4 Side Feed - Right	P3 Side Feed - Left	P4 Side Feed - Right
12"	10.69"		10.84"		10.59"		10.69"	
13"	12.69"		12.84"		12.59"		12.69"	
14"	12.69"		12.84"		12.59"		12.69"	
15"	14.69"		14.84"		14.59"		14.69"	
16"	14.69"		14.84"		14.59"		14.69"	
17"	16.69"		16.84"		16.59"		16.69"	
18"	16.69"		16.84"		16.59"		16.69"	
19"	18.69"		18.84"		18.59"		18.69"	
20"	18.69"		18.84"		18.59"		18.69"	
21"	20.69"		20.84"		20.59"		20.69"	
22"	20.69"		20.84"		20.59"		20.69"	
23"	22.69"		22.84"		22.59"		22.69"	
24"	22.69"		22.84"		22.59"		22.69"	
36"	34.69"		34.84"		34.59"		34.69"	
48"	46.69"		46.84"		46.59"		46.69"	
60"	58.69"		58.84"		58.59"		58.69"	
72"	70.69"		70.84"		70.59"		70.69"	
84"	82.69"		82.84"		82.59"		82.69"	
96"	94.69"		94.84"		94.59"		94.69"	



# VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	



# VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" .71"	<b>HINGE - HMB-L</b> 1.46" 1.29" 1.46"	<b>HINGE - HMB-XL</b> 4" 1.46"	<b>Q-PIVOT</b> .75" 1.03"	<b>Q-ANGLE</b> 1.38" 2.23"	<b>NJ-LARGE</b> 	<b>NU-LARGE</b> 	<b>SD-J-LARGE</b> 	<b>BL-LARGE</b> 	<b>NL-LARGE</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket
<b>SD-L-LARGE</b> 	<b>MMA-02</b> 1.86" .64" 12" .58"	Magnet Mount Accessory for MG-02							



## VERS-INSERT (08) STATIC COLOR

24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE WIRING ACCESSORIES



### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage