





VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



- A VERSatile fixture with customizable options to meet the specific needs of various applications
- The batwing and prismatic lens options offer glare-reducing illumination
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: **VERS-08-SW-5.0-30-DRY-GC-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

1 PRODUCT VERS-08-SW VERS-08-SW-USA Select USA option for BAA and BABA projects. Only DRY or WET ratings apply. See following pages for compatible power supplies.	2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 9.0HE 9.0W/ft HE 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft	3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information	5 LENS BAT Batwing GC Glare Control For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	10 WIRE COLOR WH White BK Black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less




VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory




Profile with TBC-03




Profile with TBC-04




Profile with TBC-05




Profile with L1 Louver




Profile with TBC-05 & L1 Louver




Profile with TBC-06 & L1 Louver




Profile with TBC-07 & L1 Louver




Profile with TBC-08 & L1 Louver




Profile with L2 Louver




Profile with TBC-05 & L2 Louver



Profile with TBC-06 & L2 Louver



Profile with TBC-07 & L2 Louver



Profile with TBC-08 & L2 Louver

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-08-SW-**-30-DRY

	1.5 W/FT			1.5HE W/FT			3.0 W/FT			3.0HE W/FT			4.0 W/FT			5.0 W/FT			6.0HE W/FT			9.0HE W/FT		
	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR
BAT	130	98	N/A	149	98	N/A	226	98	N/A	290	97	N/A	282	98	N/A	349	98	N/A	581	98	N/A	797	98	N/A
GC	142	98	≤17.8	167	98	≤18.8	260	98	≤19.7	330	97	≤21.0	315	98	≤20.5	382	98	≤21.7	602	98	≤23.3	818	98	≤24.4

5 DIODE VISIBILITY





BAT - Batwing lens

GC - Glare Control lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-INSERT (08) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—

6 EXTERNAL LOUVER

PLASTIC

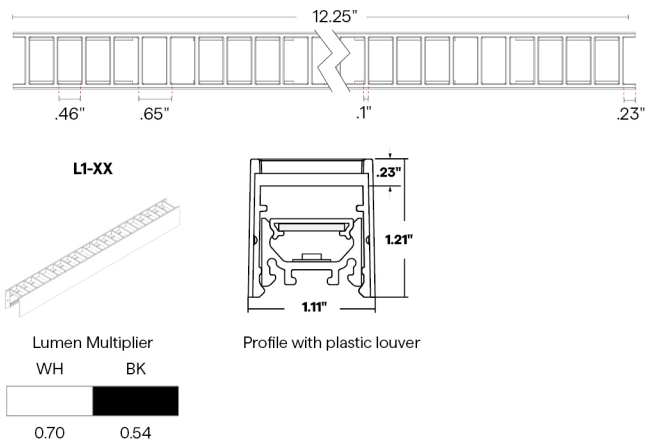


METAL

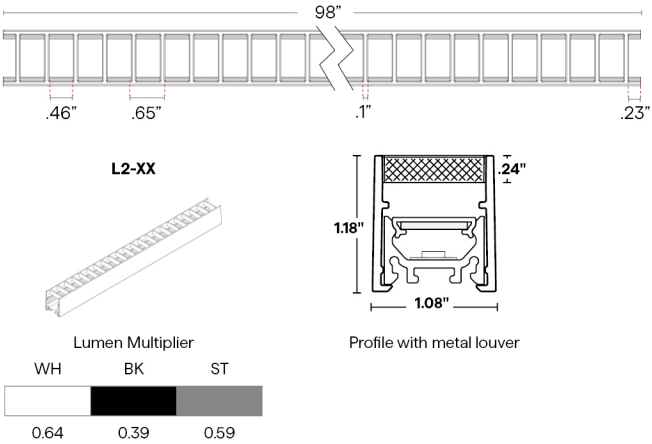


7 WIRE INPUT/OUTPUT

SINGLE (Input only)

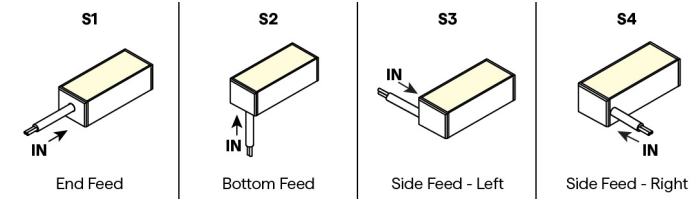

PASS THROUGH (Input/Output)

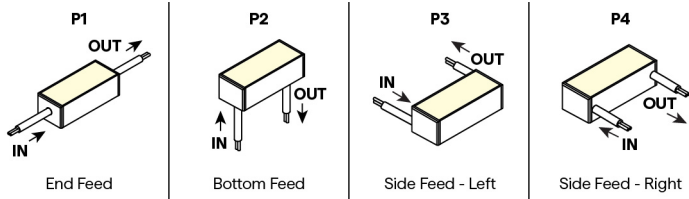




VERS-INSERT (08) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

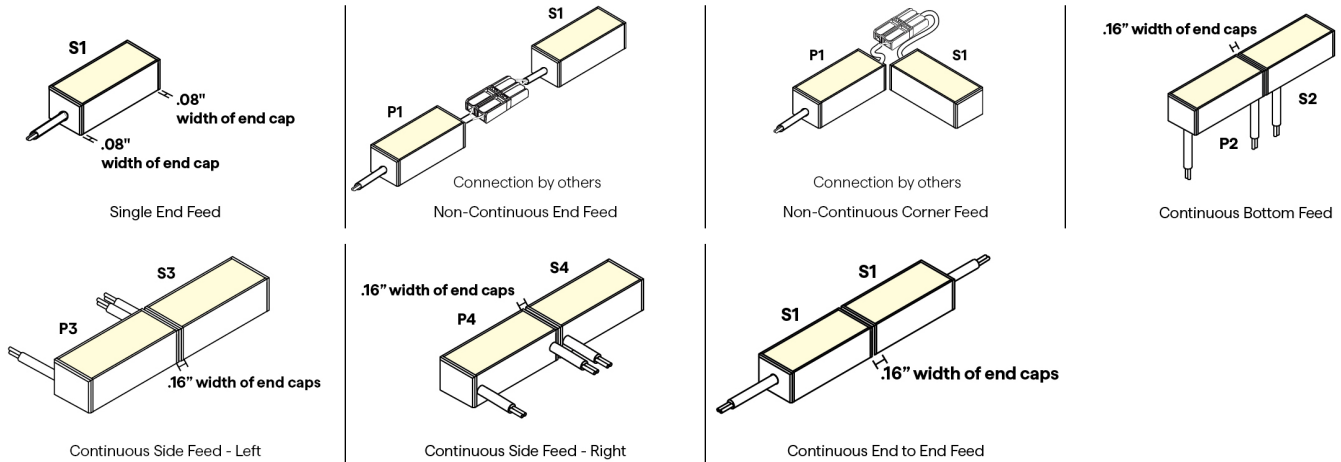

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

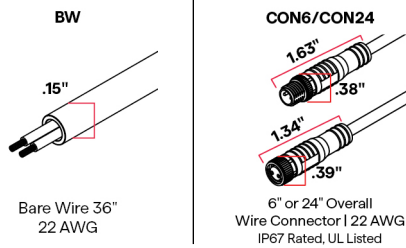

10 WIRE COLOR



12 MOUNTING

CC (CC-01)	CC (CC-02)	MG	MMA-02	TBC-03
Concealed Clip 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-01 Each clips comes with a #4 x 5/8\" Flat Head screw.	Louver Concealed Clip Required if L1 or L2 Louver is selected 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-02 Each clips comes with a #4 x 5/8\" Flat Head screw.	Magnet Clip One MG provided per foot To order separately use MG-02	Magnet Mount Accessory for MG-02 Sold separately, to order use MMA-02 Each clip comes with a #6 Flat Screw Required when mounting to a non-magnetic surface	Plastic T-Bar Clip Use on 9/16\" Flat Drop Ceiling 2 clips provided for first 12\"; 1 clip provided for each additional 12\" or less length To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key



VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

TBC-04 Plastic T-Bar Clip Use on 15/16" Flat or Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-04 Each pair of clips comes with M2.5 x 4mm set screw and Allen key	TBC-05 Plastic T-Bar Clip Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-05 Each pair of clips comes with M2.5 x 4mm set screw and Allen key	TBC-06 Plastic T-Bar Clip Use with Louver on 9/16" Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-06 Each pair of clips comes with M2.5 x 4mm set screw and Allen key	TBC-07 Plastic T-Bar Clip Use with Louver on 15/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-07 Each pair of clips comes with M2.5 x 4mm set screw and Allen key	TBC-08 Plastic T-Bar Clip Use with Louver on 15/16" Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-08 Each pair of clips comes with M2.5 x 4mm set screw and Allen key
--	---	---	---	--


13 FINISH

	Satin
	Black
	Bronze
	White

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

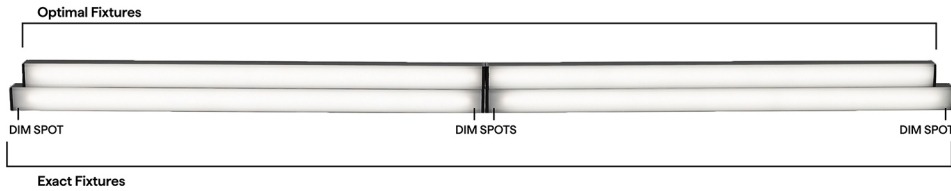



VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed









SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
								
12"	11.49"		11.74"		11.34"		11.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	13.49"		13.74"		13.34"		13.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	15.49"		15.74"		15.34"		15.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	17.49"		17.74"		17.34"		17.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	19.49"		19.74"		19.34"		19.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	21.49"		21.74"		21.34"		21.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	23.49"		23.74"		23.34"		23.44"	
36"	35.49"		35.74"		35.34"		35.44"	
48"	47.49"		47.74"		47.34"		47.44"	
60"	59.49"		59.74"		59.34"		59.44"	
72"	71.49"		71.74"		71.34"		71.44"	
84"	83.49"		83.74"		83.34"		83.44"	
96"	95.49"		95.74"		95.34"		95.44"	









SW WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
								
12"	10.69"		10.84"		10.59"		10.69"	
13"	12.69"		12.84"		12.59"		12.69"	
14"	12.69"		12.84"		12.59"		12.69"	
15"	14.69"		14.84"		14.59"		14.69"	
16"	14.69"		14.84"		14.59"		14.69"	
17"	16.69"		16.84"		16.59"		16.69"	
18"	16.69"		16.84"		16.59"		16.69"	
19"	18.69"		18.84"		18.59"		18.69"	
20"	18.69"		18.84"		18.59"		18.69"	
21"	20.69"		20.84"		20.59"		20.69"	
22"	20.69"		20.84"		20.59"		20.69"	
23"	22.69"		22.84"		22.59"		22.69"	
24"	22.69"		22.84"		22.59"		22.69"	
36"	34.69"		34.84"		34.59"		34.69"	
48"	46.69"		46.84"		46.59"		46.69"	
60"	58.69"		58.84"		58.59"		58.69"	
72"	70.69"		70.84"		70.59"		70.69"	
84"	82.69"		82.84"		82.59"		82.69"	
96"	94.69"		94.84"		94.59"		94.69"	



VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 End Feed IN	S2 Bottom Feed IN	P1 End Feed IN	P2 Bottom Feed IN	S3 Side Feed - Left IN	S4 Side Feed - Right IN	P3 Side Feed - Left IN	P4 Side Feed - Right IN
12"		10.49"		10.74"		10.34"		10.44"
13"		12.49"		12.74"		12.34"		12.44"
14"		12.49"		12.74"		12.34"		12.44"
15"		14.49"		14.74"		14.34"		14.44"
16"		14.49"		14.74"		14.34"		14.44"
17"		16.49"		16.74"		16.34"		16.44"
18"		16.49"		16.74"		16.34"		16.44"
19"		18.49"		18.74"		18.34"		18.44"
20"		18.49"		18.74"		18.34"		18.44"
21"		20.49"		20.74"		20.34"		20.44"
22"		20.49"		20.74"		20.34"		20.44"
23"		22.49"		22.74"		22.34"		22.44"
24"		22.49"		22.74"		22.34"		22.44"
36"		34.49"		34.74"		34.34"		34.44"
48"		46.49"		46.74"		46.34"		46.44"
60"		58.49"		58.74"		58.34"		58.44"
72"		70.49"		70.74"		70.34"		70.44"
84"		82.49"		82.74"		82.34"		82.44"
96"		94.49"		94.74"		94.34"		94.44"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	








VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NJ-LARGE  J Mounting Bracket	NU-LARGE  U Mounting Bracket	SD-J-LARGE  J Mounting Bracket	BL-LARGE  Backwards L Mounting Bracket	NL-LARGE  L Mounting Bracket
SD-L-LARGE  L Mounting Bracket	MMA-02  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02								



VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP
--	---	--	--	---

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage