



# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1<br>PRODUCT | 2<br>WATTS/ FT | 3<br>CCT | 4<br>RATED | 5<br>LENS | 6<br>EXTERNAL LOUVER |
|--------------|----------------|----------|------------|-----------|----------------------|
| VERS-07-DW   |                |          |            |           | N/A                  |

white optics

UL LISTED

ROHS COMPLIANT

EPD ENVIRONMENTAL PRODUCT DECLARATION

JAB-2019 HE only

5 YEAR WARRANTY

BAA & BABA CONTACT FACTORY

Declare

Red List Approved

- A VERSatile fixture with a black louver that is designed to mitigate diode imaging and glare
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options

ADDITIONAL INFORMATION REQUIRED TO ORDER

| 7<br>WIRE INPUT/OUTPUT | 8<br>CONNECTOR/WIRE IN | 9<br>CONNECTOR/WIRE OUT | 10<br>WIRE COLOR | 11<br>WIRE TYPE | 12<br>MOUNTING | 13<br>FINISH | 14<br>LENGTH (IN) | 15<br>EXACT/OPTIMAL |
|------------------------|------------------------|-------------------------|------------------|-----------------|----------------|--------------|-------------------|---------------------|
|                        |                        |                         |                  |                 |                |              |                   |                     |

Sample Part Number: VERS-07-DW-2.5HE-20/30-DRY-DF-P1-BW-BW-BK-CL2-CC-BK-48"-E

|   |   |  |   |  |   |
|---|---|--|---|--|---|
| <b>1</b><br><b>PRODUCT</b><br><br>VERS-07-DW<br><br>LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies. | <b>2</b><br><b>WATTS/FT</b><br><br>1.5HE 1.5W/ft HE<br>2.5HE 2.5W/ft HE<br><br>1.5HE 1.5W/ft HE<br>2.5HE 2.5W/ft HE   | <b>3</b><br><b>CCT</b><br><br>20/27 2000K/2700K<br>20/30 2000K/3000K<br>27/40 2700K/4000K<br>27/55 2700K/5500K<br><br>24/30 2400K/3000K<br>27/40 2700K/4000K   | <b>4</b><br><b>RATED</b><br><br>DRY IP20<br><br>DMP IP44  | <b>5</b><br><b>LENS</b><br><br>DF Diffused<br>CL Clear<br><br>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.  | <b>6</b><br><b>EXTERNAL LOUVER</b><br><br>N/A No Louver |
| <b>7</b><br><b>WIRE INPUT/OUTPUT</b><br><br>SINGLE (Input only)<br>S1 End Feed<br>S2 Bottom Feed<br><br>When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.                               | <b>8</b><br><b>CONNECTOR/WIRE IN</b><br><br>BW Bare Wire (Standard 36")<br>CON6 Connector 6"<br>CON24 Connector 24"<br><br>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | <b>9</b><br><b>CONNECTOR/WIRE OUT</b><br><br>CLS Closed End (No feed)<br><br>BW Bare Wire (Standard 36")<br>CON6 Connector 6"<br>CON24 Connector 24"<br><br>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | <b>10</b><br><b>WIRE COLOR</b><br><br>WH White<br>BK Black  |  |   |
| <b>11</b><br><b>WIRE TYPE</b><br><br>CL2 Class 2<br>CL2P Plenum Rated<br><br>CL2P only available with bare wire leads (BW)  | <b>12</b><br><b>MOUNTING</b><br><br>CC Concealed Clip<br>MG Magnet<br>TBC-03 9/16" Flat TB-Grid<br>TBC-04 15/16" Flat or Tegular TB-Grid<br>TBC-05 9/16" Tegular TB-Grid  | <b>13</b><br><b>FINISH</b><br><br>ST Satin<br>BK Black<br>BZ Bronze<br>WH White<br>CU Custom   | <b>14</b><br><b>LENGTH (IN)</b><br><br>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | <b>15</b><br><b>EXACT/OPTIMAL</b><br><br><input checked="" type="radio"/> Optimal Illumination<br><input type="radio"/> Exact Specified Length<br><br>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. |   |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

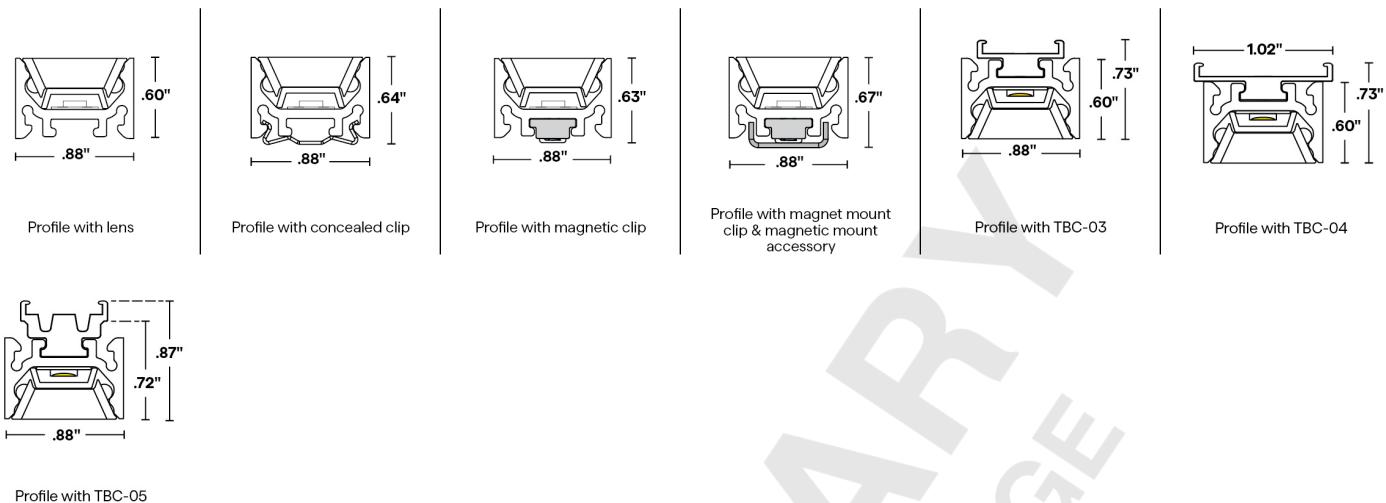

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VERS-07-DW-\*\*-\*\*-DRY

|    | 1.5HE W/FT |     | 2.5HE W/FT |       |     |        |
|----|------------|-----|------------|-------|-----|--------|
|    | LM/FT      | CRI | UGR        | LM/FT | CRI | UGR    |
| CL | 82         | 97  | ≤ 13       | 125   | 98  | ≤ 14.5 |
| DF | 65         | 97  | ≤ 13.4     | 102   | 98  | ≤ 15   |

## 5 DIODE VISIBILITY



DF - Diffused lens  
CL - Clear lens

## TEMPERATURE RATINGS

|     | DW 1.5 HE W/FT                           |      |                                       |      | DW 2.5 HE W/FT                           |      |                                       |      |       |
|-----|--|------|---------------------------------------|------|--|------|---------------------------------------|------|-------|
|     | Q-Tran power supply other than DALI, DMX |      | DALI, DMX, or non-Q-Tran power supply |      | Q-Tran power supply other than DALI, DMX |      | DALI, DMX, or non-Q-Tran power supply |      |       |
|     | Min                                      | Max  | Min                                   | Max  | Min                                      | Max  | Min                                   | Max  |       |
| DRY | Ambient Operating Temp - Surface         | -4°F | 145°F                                 | -4°F | 135°F                                    | -4°F | 135°F                                 | -4°F | 120°F |
| DMP | Ambient Operating Temp - Surface         | -4°F | 140°F                                 | -4°F | 130°F                                    | -4°F | 130°F                                 | -4°F | 115°F |




# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

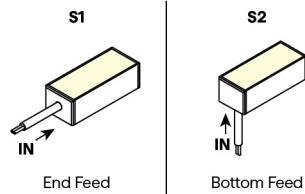


PASS THROUGH (Input/Output)

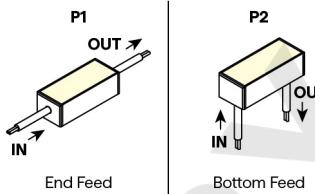


## CONFIGURATION OPTIONS

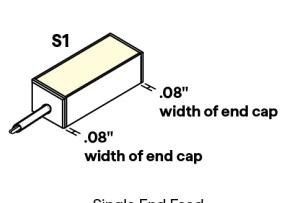


Single End Feed

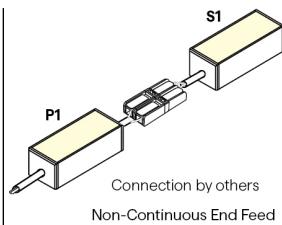


Non-Continuous End Feed



Non-Continuous Corner Feed




Continuous Bottom Feed

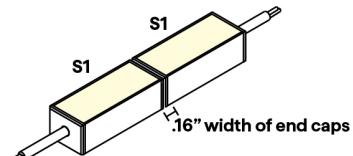


Continuous End to End Feed

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"  
22 AWG



6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

## 10 WIRE COLOR



White




Black




# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING

| CC<br>(CC-01)   | MG  | MMA-02   | TBC-03   | TBC-04   |
|---|---|--|--|--|
| <br>Concealed Clip<br><br>.18" x .7" x 1.25"   | <br>Magnet Clip<br><br>.35" x 3.13" x .15" | <br>Magnet Mount Accessory for MG-02<br><br>.64" x .58" x 1.86" x 12" | <br>Plastic T-Bar Clip<br><br>.64" x .50" x .27"  | <br>Plastic T-Bar Clip<br><br>1.02" x .50" x .27"   |
| 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'<br><br>To order separately use CC-01<br><br>Each clip comes with a #4 x 5/8" Flat Head screw. | One MG provided per foot<br><br>To order separately use MG-02   | Sold separately, to order use MMA-02<br><br>Each clip comes with a #6 Flat Screw<br><br>Required when mounting to a non-magnetic surface               | Use on 9/16" Flat Drop Ceiling<br><br>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length<br><br>To order separately use TBC-03<br><br>Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Use on 15/16" Flat or Regular Drop Ceiling<br><br>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length<br><br>To order separately use TBC-04<br><br>Each pair of clips comes with M2.5 x 4mm set screw and Allen key |



Use on 9/16" Regular Drop Ceiling  
  
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length  
  
To order separately use TBC-05  
  
Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## 13 FINISH



Satin

Black

Bronze

White

Custom color available




# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### Optimal Fixtures

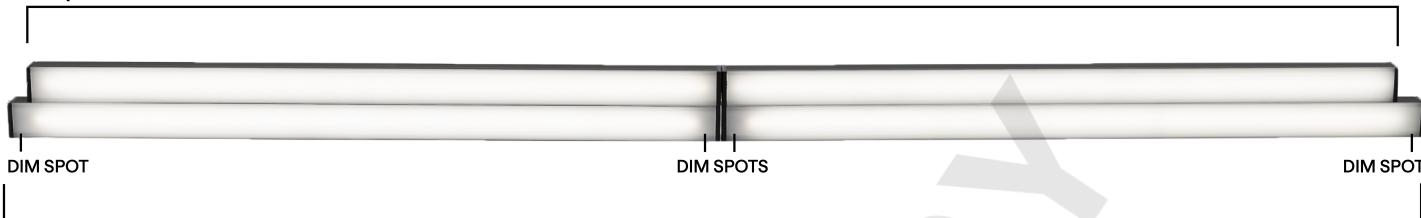

### Exact Fixtures

## DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12"              | 1"  |
| 13"              | 0.5"  |
| 14"              | 1"  |
| 15"              | 0.5"  |
| 16"              | 1"  |
| 17"              | 0.5"  |
| 18"              | 1"  |
| 19"              | 0.5"  |
| 20"              | 1"  |
| 21"              | 0.5"  |
| 22"              | 1"  |
| 23"              | 0.5"  |
| 24"              | 1"  |
| 36"              | 1"  |
| 48"              | 1"  |
| 60"              | 1"  |
| 72"              | 1"  |
| 84"              | 1"  |
| 96"              | 1"  |

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

| Requested Nominal Length | S1 & S2        |                   | P1 & P2        |                   |
|--------------------------|----------------|-------------------|----------------|-------------------|
|                          | S1<br>End Feed | S2<br>Bottom Feed | P1<br>End Feed | P2<br>Bottom Feed |
| 12"                      | 10.59"         |                   | 10.94"         |                   |
| 13"                      | 12.59"         |                   | 12.94"         |                   |
| 14"                      | 12.59"         |                   | 12.94"         |                   |
| 15"                      | 14.59"         |                   | 14.94"         |                   |
| 16"                      | 14.59"         |                   | 14.94"         |                   |
| 17"                      | 16.59"         |                   | 16.94"         |                   |
| 18"                      | 16.59"         |                   | 16.94"         |                   |
| 19"                      | 18.59"         |                   | 18.94"         |                   |
| 20"                      | 18.59"         |                   | 18.94"         |                   |
| 21"                      | 20.59"         |                   | 20.94"         |                   |
| 22"                      | 20.59"         |                   | 20.94"         |                   |
| 23"                      | 22.59"         |                   | 22.94"         |                   |
| 24"                      | 22.59"         |                   | 22.94"         |                   |
| 36"                      | 34.59"         |                   | 34.94"         |                   |
| 48"                      | 46.59"         |                   | 46.94"         |                   |
| 60"                      | 58.59"         |                   | 58.94"         |                   |
| 72"                      | 70.59"         |                   | 70.94"         |                   |
| 84"                      | 82.59"         |                   | 82.94"         |                   |
| 96"                      | 94.59"         |                   | 94.94"         |                   |



# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR  |
|--------------|---|
|              | DW-HE Tunable Applications  |
| 0.1%         | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+TW<br>QT-CAB-eLED+TW-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+TW<br>QTM-eLED+TW-AWN<br>QZ-DMX |
| 1%           | QZ-DALI-DT8   |
| 10%          | Non-Dim Power Supply with TW App Dongle   |

| DIMMING PROTOCOL   | INDOOR  |
|--|---|
|  | DW-HE Tunable Applications  |
| 0-10V  | QT-CAB-eLED+TW<br>QT-CAB-eLED+TW-AWN<br>QTM-eLED+TW<br>QTM-eLED+TW-AWN  |
| Lutron Athena  | QT-CAB-eLED+DALI-DT8-AWN<br>QT-CAB-eLED+TW-AWN<br>QTM-eLED+DALI-DT8-AWN<br>QTM-eLED+TW-AWN                    |
| DMX<br>LED wattage must be doubled for DW-HE products                        | QZ-DMX  |
| DALI-2: DT6<br>LED wattage must be doubled for DW-HE products except for AWN | QT-CAB-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6   |
| DALI-2: DT8<br>LED wattage must be doubled for DW-HE products except for AWN | QT-CAB-eLED+DALI-DT8<br>QT-CAB-eLED+DALI-DT8-AWN<br>QTM-eLED+DALI-DT8<br>QTM-eLED+DALI-DT8-AWN<br>QZ-DALI-DT8 |
| SCENE App Dimmed   | Non-Dim Power Supply with TW App Dongle   |



# VERS-LOUVER (07) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE MOUNTING ACCESSORIES


|               |               |                |           |             |                    |                    |                    |                              |                    |
|---------------|---------------|----------------|-----------|-------------|--------------------|--------------------|--------------------|------------------------------|--------------------|
| HINGE - HMB-M | HINGE - HMB-L | HINGE - HMB-XL | Q-PIVOT   | Q-ANGLE     | NJ-LARGE           | NU-LARGE           | SD-J-LARGE         | BL-LARGE                     | NL-LARGE           |
| 1.41"  .71"   | 1.46"  1.29"  | 1.46"  4"      | 75° 1.03" | 2.23" 1.38" | J Mounting Bracket | U Mounting Bracket | J Mounting Bracket | Backwards L Mounting Bracket | L Mounting Bracket |

SD-L-LARGE



L Mounting Bracket

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage