



VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed



white
optics



1-BIN
2-STEP

5 YEAR
WARRANTY

Declare

Red List
Approved

- A VERSatile fixture with a black louver that is designed to mitigate diode imaging and glare
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
VERS-07-SW			DRY		N/A

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: VERS-07-SD-5.0-30-DRY-DF-P1-BW-BW-BK-CL2-CC-BK-48"-E

1 PRODUCT VERS-07-SW See following pages for compatible power supplies.	2 WATTS/FT 2.0 2.0W/ft 4.0 4.0W/ft 6.0 6.0W/ft	3 CCT 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 RATED DRY IP20	5 LENS DF CL Diffused Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	6 EXTERNAL LOUVER N/A No Louver
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black		
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less



VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

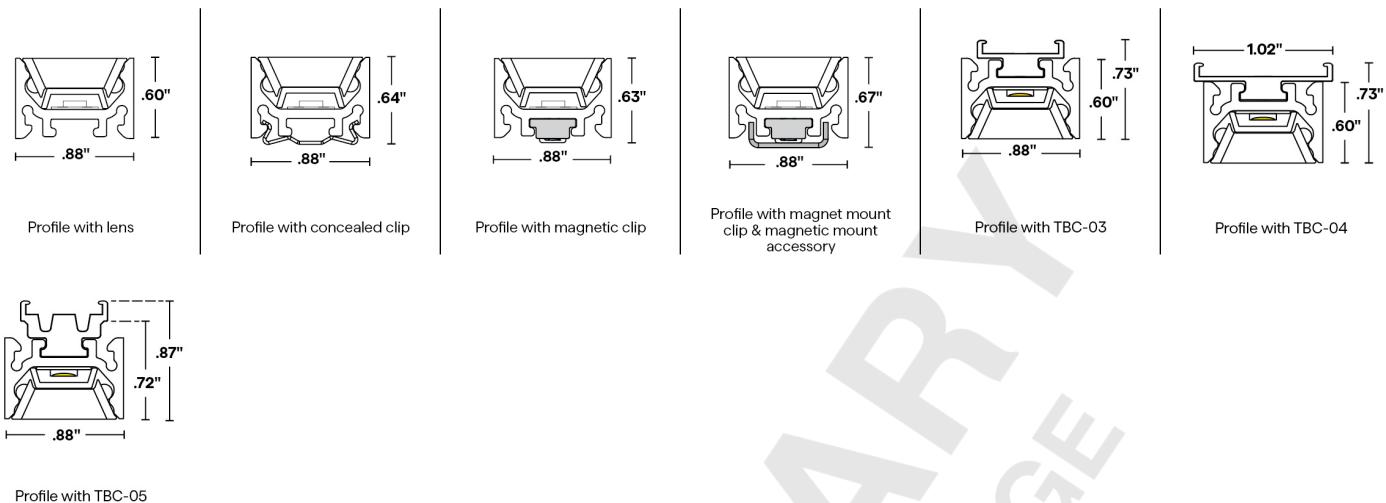

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]

Tested with VERS-07-SW--30-DRY

	1.5 W/FT				1.5HE W/FT				3.0 W/FT				3.0HE W/FT				4.0 W/FT				5.0 W/FT				6.0HE W/FT			
	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	
CL	79	97	≤ 13.3	109	98	≤ 14.7	136	98	≤ 15.5	198	97	≤ 16.9	169	98	≤ 16.1	205	98	≤ 16.7	382	98	≤ 19.3							
DF	69	97	≤ 13.8	86	98	≤ 14.8	118	98	≤ 15.7	164	98	≤ 17.2	145	98	≤ 16.6	175	98	≤ 17.3	300	98	≤ 19.3							

5 DIODE VISIBILITY



DF - Diffused lens

CL - Clear lens

TEMPERATURE RATINGS

		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—




VERS-LOUVER (07) STATIC WHITE STANDARD


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

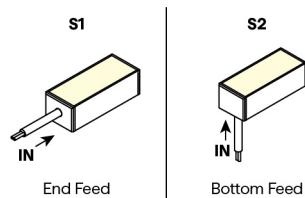


PASS THROUGH (Input/Output)

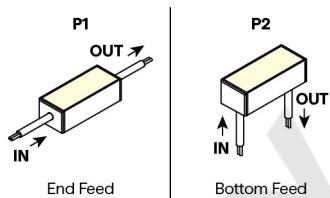


CONFIGURATION OPTIONS

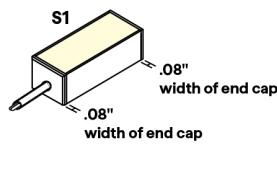


Single End Feed




Connection by others
Non-Continuous End Feed



Connection by others
Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"
Stranded 22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White





Black




VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC (CC-01)	MG	MMA-02	TBC-03	TBC-04
 Concealed Clip .18" x .7" x 1.25" 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-01 Each clip comes with a #4 x 5/8" Flat Head screw.	 Magnet Clip .35" x 3.13" x 1.15" One MG provided per foot To order separately use MG-02	 Magnet Mount Accessory for MG-02 .64" x .58" x 1.86" x 12" Sold separately, to order use MMA-02 Each clip comes with a #6 Flat Screw Required when mounting to a non-magnetic surface	 Plastic T-Bar Clip .64" x .50" x 27" Use on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key	 Plastic T-Bar Clip 1.02" x .50" x 27" Use on 15/16" Flat or Regular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-04 Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Satin

Black

Bronze

White

Custom color available




VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

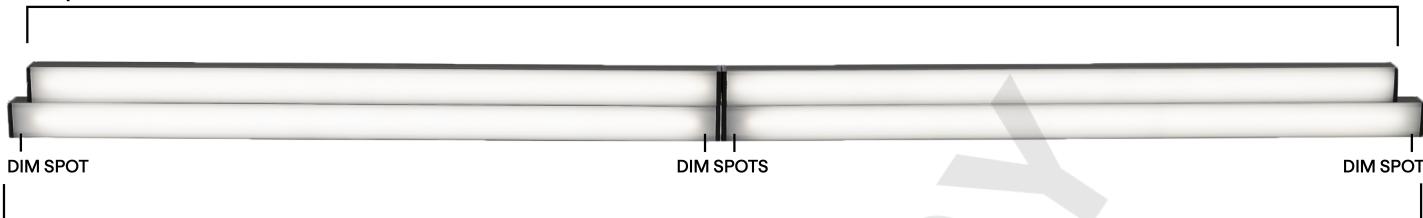

Exact Fixtures

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.49"		11.74"	
13"	12.49"		12.74"	
14"	13.49"		13.74"	
15"	14.49"		14.74"	
16"	15.49"		15.74"	
17"	16.49"		16.74"	
18"	17.49"		17.74"	
19"	18.49"		18.74"	
20"	19.49"		19.74"	
21"	20.49"		20.74"	
22"	21.49"		21.74"	
23"	22.49"		22.74"	
24"	23.49"		23.74"	
36"	35.49"		35.74"	
48"	47.49"		47.74"	
60"	59.49"		59.74"	
72"	71.49"		71.74"	
84"	83.49"		83.74"	
96"	95.49"		95.74"	



VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

SW-HE DRY LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.49"		10.74"	
13"	12.49"		12.74"	
14"	12.49"		12.74"	
15"	14.49"		14.74"	
16"	14.49"		14.74"	
17"	16.49"		16.74"	
18"	16.49"		16.74"	
19"	18.49"		18.74"	
20"	18.49"		18.74"	
21"	20.49"		20.74"	
22"	20.49"		20.74"	
23"	22.49"		22.74"	
24"	22.49"		22.74"	
36"	34.49"		34.74"	
48"	46.49"		46.74"	
60"	58.49"		58.74"	
72"	70.49"		70.74"	
84"	82.49"		82.74"	
96"	94.49"		94.74"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $+/- 5\%$ tolerance.

DIM TO LEVEL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle



VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)	QTM-eLED(E)
DMX	QZ-DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" x .71"	HINGE - HMB-L 1.46" x 1.29"	HINGE - HMB-XL 1.46" x 4"	Q-PIVOT .75" x 1.03"	Q-ANGLE 1.38" x 2.23"	NJ-LARGE 	NU-LARGE 	SD-J-LARGE 	BL-LARGE 	NL-LARGE
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket

SD-L-LARGE



L Mounting Bracket



VERS-LOUVER (07) STATIC WHITE STANDARD

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES



COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage

PRELIMINARY
SUBJECT TO CHANGE