





VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



white optics
UL LISTED

ROHS COMPLIANT

EPD ENVIRONMENTAL PRODUCT DECLARATION

JAB-2019
HE only

5 YEAR WARRANTY

BAA BUY AMERICAN ACT COMPLIANT

BABA BUY AMERICA COMPLIANT

Red List Approved

Declare.

- Features a co-extruded lens with integrated louvers that provide 35° viewing angles, delivering exceptional glare control ideal for direct view applications.
- The Crosswise louver reduces end-view glare while the Lengthwise louver reduces side-view glare.
- Lens options include frosted or diffused finishes to suit various lighting requirements.
- Integrated metal endcaps combined with extruded aluminum housing give this LED fixture a polished modern look.
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS LED fixtures.
- Consult factory for field assembly options.
- Can be suitable for exterior use when specified as wet, contact factory for more information.

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 INTERNAL LENS	6 INTERNAL LOUVER
				DF	

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: VERS-11-DW-2.5HE-20/30-DRY-DF-C-P1A-BW-BW-BK-CL2-CC-BK-48"-E

1 PRODUCT VERS-11-DW VERS-11-DW-USA Select USA option for BAA and BABA projects. Only DRY ratings apply. See following pages for compatible power supplies.	2 WATTS/FT 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K 24/30 2400K/3000K 27/40 2700K/4000K	4 RATED DRY IP20 DMP IP54	5 INTERNAL LENS DF Diffused Internal For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-04 for additional 25° lens option.	6 INTERNAL LOUVER C Crosswise Internal L Lengthwise Internal Louver slats are angled. Refer to diagrams to identify the side of the fixture with the most visual cutoff.
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1A End Feed S1B End Feed S2A Bottom Feed S2B Bottom Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR WH White BK Black		
PASS THROUGH (Input/output) P1A End Feed P1B End Feed P2A Bottom Feed P2B Bottom Feed When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details.	BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom Finish is only applicable to the aluminum extrusion and endcaps. The Cover Lens and Internal Louver is always black. Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

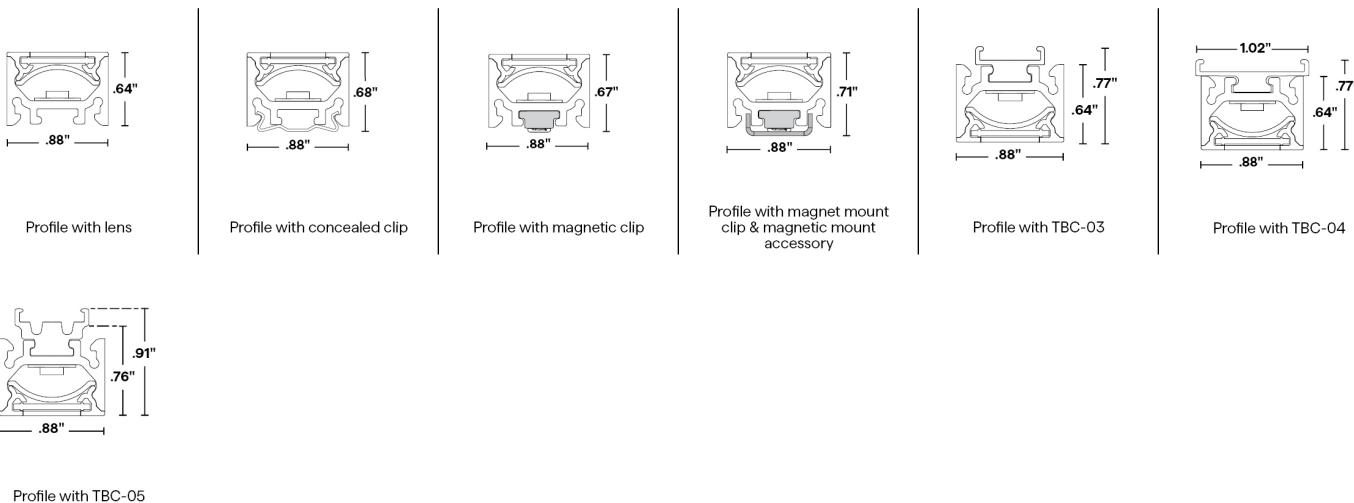

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-11-DW-**-**-DRY

3000K	1.5HE W/FT			2.5HE W/FT			4.0HE W/FT		
	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR
DF-C	36	98	≤ 11.0	60	98	≤ 12.8	80	99	≤ 13.8
DF-L	43	98	≤ 14.3	71	98	≤ 15.9	99	98	≤ 17.4


5 DIODE VISIBILITY



DF - Diffused lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

		DW 1.5 HE W/FT	DW 3.0 HE W/FT	DW 2.5 HE W/FT	DW 5.0 HE W/FT	DW 4.0 HE W/FT	DW 8.0 HE W/FT						
		QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply	QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply	QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply						
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—

6 INTERNAL LOUVER


INTERNAL LOUVER - LENGTHWISE

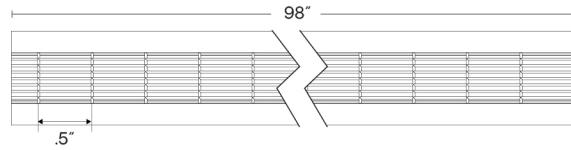

L



INTERNAL LOUVER - CROSSWISE

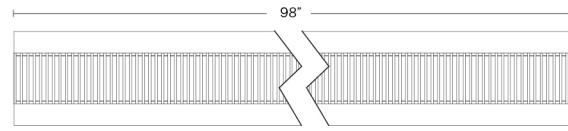


C



8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"
22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White





Black



VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC (CC-01)	MG	MMA-02	TBC-03	TBC-04
 .18" x .7" x 1.25"	 .35" x 3.13" x 1.15"	 .64" x .58" x 1.86" x 12"	 .64" x .50" x 2.7"	 1.02" x .50" x 2.7"
Concealed Clip	Magnet Clip	Magnet Mount Accessory for MG-02	Plastic T-Bar Clip	Plastic T-Bar Clip
2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'	One MG provided per foot	Sold separately, to order use MMA-02	Use on 9/16" Flat Drop Ceiling	Use on 15/16" Flat or Regular Drop Ceiling
To order separately use CC-01	To order separately use MG-02	Each clip comes with a #6 Flat Screw	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length
Each clip comes with a #4 x 5/8" Flat Head screw.		Required when mounting to a non-magnetic surface	To order separately use TBC-03	To order separately use TBC-04
			Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key

MOUNTING CONTINUED

TBC-05



Plastic T-Bar Clip

Use on 9/16" Regular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory. Finish is only applicable to the aluminum extrusion and endcaps. The Cover Lens and Internal Louver is always black.




VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

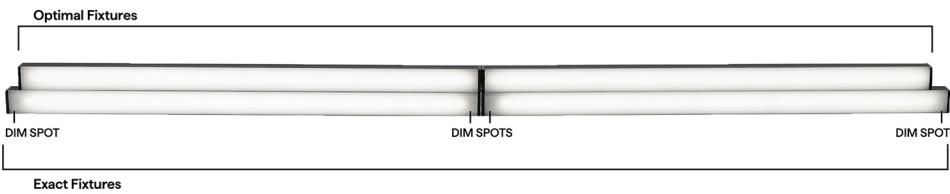

DW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $\pm 5\%$ tolerance.

DIM TO LEVEL	INDOOR
	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle




VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

COMPATIBLE MOUNTING ACCESSORIES

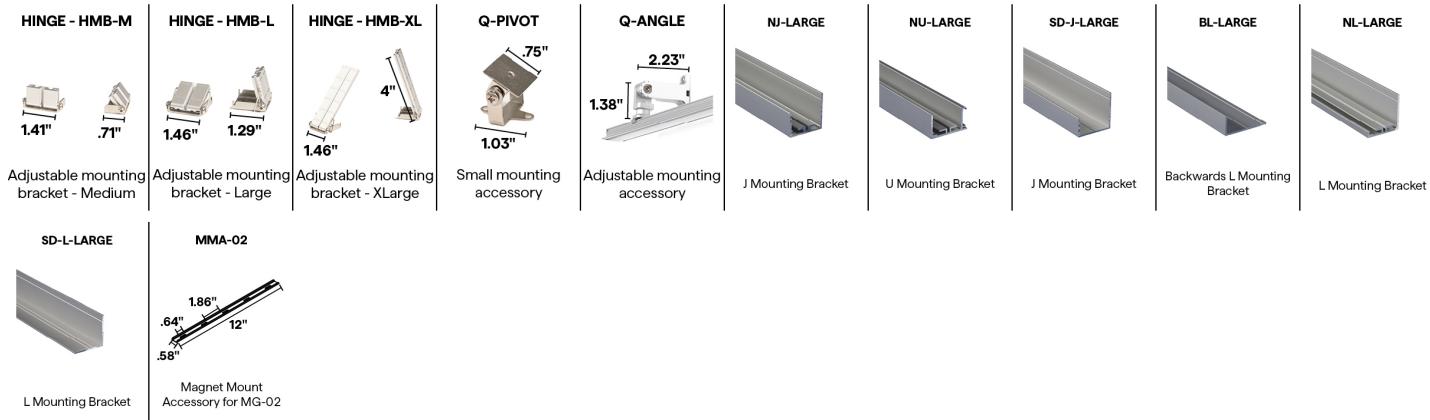

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



VERS-NANO-LOUVER (11) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage