



VERS-NANO-LOUVER (11) STATIC WHITE



24VDC Linear Fixtures - Surface & Recessed



Standard and HE

Red List Approved

Declare.

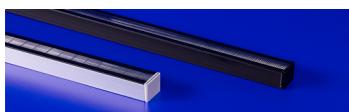

- Features a co-extruded lens with integrated louvers that provide 35° viewing angles, delivering exceptional glare control ideal for direct view applications.
- The Crosswise louver reduces end-view glare while the Lengthwise louver reduces side-view glare.
- Lens options include frosted or diffused finishes to suit various lighting requirements.
- Integrated metal endcaps combined with extruded aluminum housing give this LED fixture a polished modern look.
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS LED fixtures.
- Consult factory for field assembly options.
- Can be suitable for exterior use when specified as wet, contact factory for more information.

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 INTERNAL LENS | 6 INTERNAL LOUVER |
|--------------|----------------|----------|------------|-----------------------|-------------------------|
| VERS-11-SW | | | | | |

Sample Part Number: VERS-11-SW-5.0-30-DRY-DF-C-P1A-BW-BW-BK-CL2-CC-BK-48"-E

| 7 WIRE INPUT/OUTPUT | 8 CONNECTOR/WIRE IN | 9 CONNECTOR/WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|------------------------|------------------------|-------------------------|------------------|-----------------|----------------|--------------|-------------------|----------------------|
| | | | | | | | | |

| | | | | | |
|---|---|--|---|---|--|
| 1 PRODUCT VERS-11-SW See following pages for compatible power supplies. | 2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 9.0HE 9.0W/ft HE | 3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | 4 RATED DRY IP20 | 5 INTERNAL LENS DF Diffused Internal FR Frosted Internal For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-04 for additional 25° lens option. | 6 INTERNAL LOUVER C Crosswise Internal L Lengthwise Internal Louver slats are angled. Refer to diagrams to identify the side of the fixture with the most visual cutoff. |
| | 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE | 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | DRY IP20 | | |
| | 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE | 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | DMP IP54 | | |
| | 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft | 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | WET IP67 | Can be suitable for exterior use, contact factory for more information | |
| 7 WIRE INPUT/OUTPUT SINGLE (Input only) S1A End Feed S1B End Feed S2A Bottom Feed S2B Bottom Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. | 8 CONNECTOR/WIRE IN BW CON6 CON24 Bare Wire (Standard 36") Connector 6" Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | 9 CONNECTOR/WIRE OUT CLS Closed End (No feed) | 10 WIRE COLOR WH BK White Black | | |
| PASS THROUGH (Input/output) P1A End Feed P1B End Feed P2A Bottom Feed P2B Bottom Feed When using TBC Mounting, a bare wire P2 wire feed is recommended. See install instructions for details. | BW CON6 CON24 Bare Wire (Standard 36") Connector 6" Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | BW CON6 CON24 Bare Wire (Standard 36") Connector 6" Connector 24" BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | | | |
| 11 WIRE TYPE CL2 CL2P Class 2 Plenum Rated CL2P only available with bare wire leads (BW) | 12 MOUNTING CC MG TBC-03 TBC-04 TBC-05 Concealed Clip Magnet 9/16" Flat TB-Grid 15/16" Flat or Tegular TB-Grid 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver | 13 FINISH ST BK BZ WH CU Satin Black Bronze White Custom Finish is only applicable to the aluminum extrusion and endcaps. The Cover Lens and Internal Louver is always black. Custom finishes require a longer lead time, consult factory | 14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | 15 EXACT/OPTIMAL O E Optimal Illumination Exact Specified Length Exact fixtures match the exact length you specify, but they may have clip spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. | |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less



VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

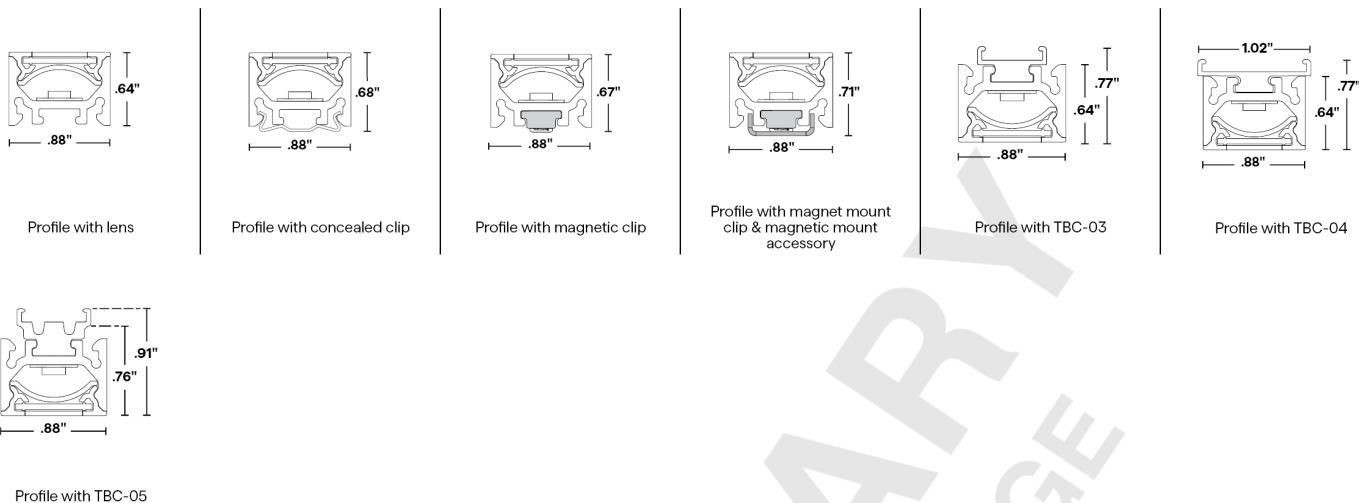

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-11-SW-**-30-DRY

| | 1.5W/FT | | | 3.0W/FT | | | 4.0W/FT | | | 5.0W/FT | | |
|------|---------|-----|--------|---------|-----|--------|---------|-----|--------|---------|-----|--------|
| | LM/FT | CRI | UGR |
| FR-C | 38 | 98 | ≤ 6.4 | 64 | 98 | ≤ 8.4 | 82 | 98 | ≤ 8.8 | 100 | 98 | ≤ 10.2 |
| FR-L | 56 | 98 | ≤ 15.3 | 94 | 98 | ≤ 17.2 | 121 | 98 | ≤ 18.4 | 163 | 98 | ≤ 19.4 |
| DF-C | 34 | 98 | ≤ 10.6 | 55 | 98 | ≤ 12.4 | 72 | 98 | ≤ 13.4 | 90 | 98 | ≤ 14.0 |
| DF-L | 42 | 98 | ≤ 14.2 | 68 | 98 | ≤ 15.9 | 88 | 98 | ≤ 16.9 | 110 | 98 | ≤ 17.3 |

[Calculated L70 = 66000 hrs]
Tested with VERS-11-SW-HE-**-30-DRY

| | 1.5HE W/FT | | | 3.0HE W/FT | | | 6.0HE W/FT | | | 9.0HE W/FT | | |
|------|------------|-----|--------|------------|-----|--------|------------|-----|--------|------------|-----|--------|
| | LM/FT | CRI | UGR |
| FR-C | 44 | 98 | ≤ 7.4 | 89 | 98 | ≤ 9.6 | 182 | 98 | ≤ 11.6 | 263 | 98 | ≤ 12.8 |
| FR-L | 66 | 98 | ≤ 15.7 | 131 | 98 | ≤ 18.3 | 269 | 98 | ≤ 20.8 | 373 | 98 | ≤ 21.7 |
| DF-C | 40 | 98 | ≤ 11.3 | 77 | 98 | ≤ 13.5 | 155 | 98 | ≤ 15.9 | 235 | 98 | ≤ 17.5 |
| DF-L | 48 | 98 | ≤ 14.4 | 97 | 98 | ≤ 17.2 | 191 | 98 | ≤ 19.4 | 278 | 98 | ≤ 20.4 |

5 DIODE VISIBILITY




DF - Diffused lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

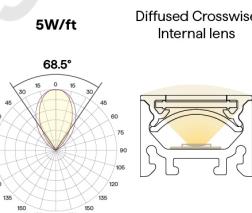



VERS-NANO-LOUVER (11) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


| | | 15 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 9.0 HE W/FT | |
|-----|----------------------------------|---------|-------|-------------|-------|----------|-------|-------------|-------|----------|-------|----------|-------|-------------|-------|-------------|-------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | -4°F | 100°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 135°F | -4°F | 140°F | -4°F | 125°F | -4°F | 130°F | -4°F | 120°F | -4°F | 115°F | -4°F | 115°F | -13°F | 95°F |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 125°F | — | — | -4°F | 120°F | -4°F | 115°F | — | — | — | — |

6 INTERNAL LOUVER

INTERNAL LOUVER - LENGTHWISE

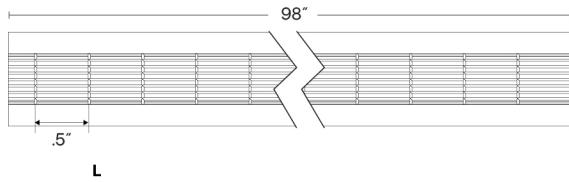


INTERNAL LOUVER - CROSSWISE

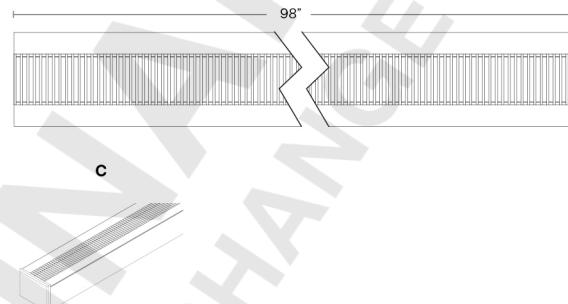


CONFIGURATION OPTIONS

LENGTHWISE


Reduced Side View Glare - Louver slats are angled towards one side of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

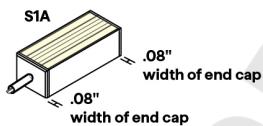


Single End Feed

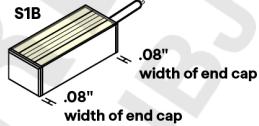


Single End Feed




Non-Continuous End Feed




Non-Continuous End Feed

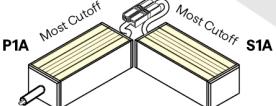


Non-Continuous Corner Feed

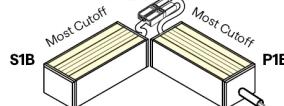

Non-Continuous Corner Feed

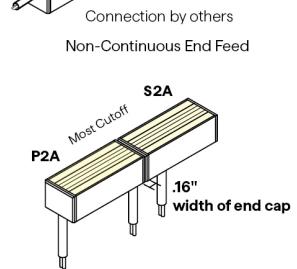

Continuous Bottom Feed

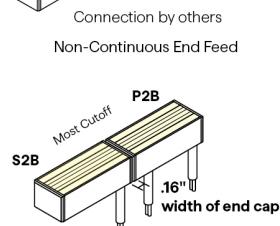

Continuous Bottom Feed




VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


CROSSWISE

Reduced End View Glare - Louver slats are angled towards one end of the fixture. Refer to diagrams to identify the side of the fixture with the most visual cutoff.

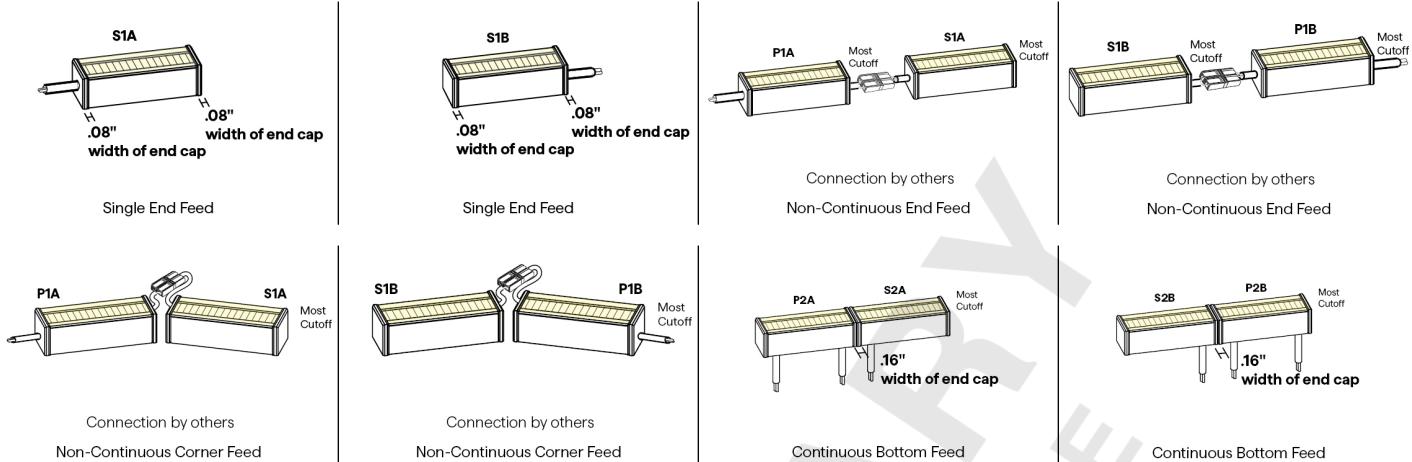

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

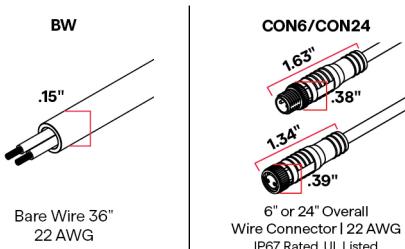

10 WIRE COLOR



12 MOUNTING

| CC (CC-01) | MG | MMA-02 | TBC-03 | TBC-04 |
|---|---|--|--|--|
| .18" .7" 1.25" | .15" 3.13" .35" | 1.86" 12" .64" .58" | .64" .50" .27" | 1.02" .50" .27" |
| Concealed Clip | Magnet Clip | Magnet Mount Accessory for MG-02 | Plastic T-Bar Clip | Plastic T-Bar Clip |
| 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' | One MG provided per foot To order separately use MG-02 | Sold separately, to order use MMA-02 Each clip comes with a #6 Flat Screw Required when mounting to a non-magnetic surface | Use on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Use on 15/16" Flat or Regular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-04 Each pair of clips comes with M2.5 x 4mm set screw and Allen key |
| To order separately use CC-01 Each clips comes with a #4 x 5/8" Flat Head screw. | | | | |




VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

TBC-05



Use on 9/16" Regular Drop Ceiling or
with Louver on 9/16" Flat Drop
Ceiling

2 clips provided for first 12"; 1 clip
provided for each additional 12" or
less length

To order separately use TBC-05

Each pair of clips comes with M2.5 x
4mm set screw and Allen key

13 FINISH



Satin

Black

Bronze


White

Custom color available

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

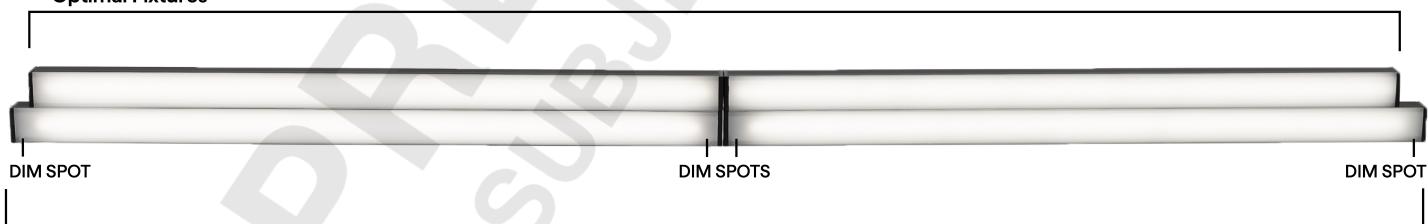

Exact Fixtures



VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|--------------------------|----------------|-------------------|----------------|-------------------|------------------------|-------------------------|------------------------|-------------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed | S3 Side Feed - Left | S4 Side Feed - Right | P3 Side Feed - Left | P4 Side Feed - Right |
| 12" | 11.49" | | 11.74" | | 11.34" | | 11.44" | |
| 13" | 12.49" | | 12.74" | | 12.34" | | 12.44" | |
| 14" | 13.49" | | 13.74" | | 13.34" | | 13.44" | |
| 15" | 14.49" | | 14.74" | | 14.34" | | 14.44" | |
| 16" | 15.49" | | 15.74" | | 15.34" | | 15.44" | |
| 17" | 16.49" | | 16.74" | | 16.34" | | 16.44" | |
| 18" | 17.49" | | 17.74" | | 17.34" | | 17.44" | |
| 19" | 18.49" | | 18.74" | | 18.34" | | 18.44" | |
| 20" | 19.49" | | 19.74" | | 19.34" | | 19.44" | |
| 21" | 20.49" | | 20.74" | | 20.34" | | 20.44" | |
| 22" | 21.49" | | 21.74" | | 21.34" | | 21.44" | |
| 23" | 22.49" | | 22.74" | | 22.34" | | 22.44" | |
| 24" | 23.49" | | 23.74" | | 23.34" | | 23.44" | |
| 36" | 35.49" | | 35.74" | | 35.34" | | 35.44" | |
| 48" | 47.49" | | 47.74" | | 47.34" | | 47.44" | |
| 60" | 59.49" | | 59.74" | | 59.34" | | 59.44" | |
| 72" | 71.49" | | 71.74" | | 71.34" | | 71.44" | |
| 84" | 83.49" | | 83.74" | | 83.34" | | 83.44" | |
| 96" | 95.49" | | 95.74" | | 95.34" | | 95.44" | |

SW WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|--------------------------|----------------|-------------------|----------------|-------------------|------------------------|-------------------------|------------------------|-------------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed | S3 Side Feed - Left | S4 Side Feed - Right | P3 Side Feed - Left | P4 Side Feed - Right |
| 12" | 11.64" | | 11.79" | | 11.54" | | 11.64" | |
| 13" | 12.64" | | 12.79" | | 12.54" | | 12.64" | |
| 14" | 13.64" | | 13.79" | | 13.54" | | 13.64" | |
| 15" | 14.64" | | 14.79" | | 14.54" | | 14.64" | |
| 16" | 15.64" | | 15.79" | | 15.54" | | 15.64" | |
| 17" | 16.64" | | 16.79" | | 16.54" | | 16.64" | |
| 18" | 17.64" | | 17.79" | | 17.54" | | 17.64" | |
| 19" | 18.64" | | 18.79" | | 18.54" | | 18.64" | |
| 20" | 19.64" | | 19.79" | | 19.54" | | 19.64" | |
| 21" | 20.64" | | 20.79" | | 20.54" | | 20.64" | |
| 22" | 21.64" | | 21.79" | | 21.54" | | 21.64" | |
| 23" | 22.64" | | 22.79" | | 22.54" | | 22.64" | |
| 24" | 23.64" | | 23.79" | | 23.54" | | 23.64" | |
| 36" | 35.64" | | 35.79" | | 35.54" | | 35.64" | |
| 48" | 47.64" | | 47.79" | | 47.54" | | 47.64" | |
| 60" | 59.64" | | 59.79" | | 59.54" | | 59.64" | |
| 72" | 71.64" | | 71.79" | | 71.54" | | 71.64" | |
| 84" | 83.64" | | 83.79" | | 83.54" | | 83.64" | |
| 96" | 95.64" | | 95.79" | | 95.54" | | 95.64" | |



VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

| Requested Nominal Length | S1 & S2 | P1 & P2 | S3 & S4 | P3 & P4 |
|--------------------------|---------|---------|---------|---------|
| 12" | | | | |
| 13" | 10.49" | 12.74" | 12.34" | 12.44" |
| 14" | 12.49" | 12.74" | 12.34" | 12.44" |
| 15" | 14.49" | 14.74" | 14.34" | 14.44" |
| 16" | 14.49" | 14.74" | 14.34" | 14.44" |
| 17" | 16.49" | 16.74" | 16.34" | 16.44" |
| 18" | 16.49" | 16.74" | 16.34" | 16.44" |
| 19" | 18.49" | 18.74" | 18.34" | 18.44" |
| 20" | 18.49" | 18.74" | 18.34" | 18.44" |
| 21" | 20.49" | 20.74" | 20.34" | 20.44" |
| 22" | 20.49" | 20.74" | 20.34" | 20.44" |
| 23" | 22.49" | 22.74" | 22.34" | 22.44" |
| 24" | 22.49" | 22.74" | 22.34" | 22.44" |
| 36" | 34.49" | 34.74" | 34.34" | 34.44" |
| 48" | 46.49" | 46.74" | 46.34" | 46.44" |
| 60" | 58.49" | 58.74" | 58.34" | 58.44" |
| 72" | 70.49" | 70.74" | 70.34" | 70.44" |
| 84" | 82.49" | 82.74" | 82.34" | 82.44" |
| 96" | 94.49" | 94.74" | 94.34" | 94.44" |

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $+/- 5\%$ tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|--------------|--|--|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | QOM-DC+CAP QOM-PH | QOM-DC+CAP QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V |
| 1% | QTM-eLED(E) QZ-DALI-DT6 | QTM-eLED(E) QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC Q-SET-mLED | |



VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|------------------|--|--|---|--|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V | Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | | |
| ECO System | QTM-eLED(E) | QTM-eLED(E) | | |
| DMX | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX QZ-DMX | Q-SET-QZ-DMX QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |

COMPATIBLE MOUNTING ACCESSORIES

| | | | | | | | | | |
|--------------------------------------|-------------------------------------|--------------------------------------|------------------------------|-------------------------------|---------------------|---------------------|-----------------------|------------------------------|---------------------|
| HINGE - HMB-M 1.41" 0.71" | HINGE - HMB-L 1.46" 1.29" | HINGE - HMB-XL 1.46" 4" | Q-PIVOT .75" 1.03" | Q-ANGLE 1.38" 2.23" | NJ-LARGE | NU-LARGE | SD-J-LARGE | BL-LARGE | NL-LARGE |
| Adjustable mounting bracket - Medium | Adjustable mounting bracket - Large | Adjustable mounting bracket - XLarge | Small mounting accessory | Adjustable mounting accessory | J Mounting Bracket | U Mounting Bracket | J Mounting Bracket | Backwards L Mounting Bracket | L Mounting Bracket |

SD-L-LARGE



L Mounting Bracket



VERS-NANO-LOUVER (11) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES



COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage