



# VERS-OPTICS (05) RGB

24VDC Linear Fixtures - Surface & Recessed

white  
optics




RoHS  
COMPLIANT

EPD  
ENVIRONMENTAL  
PRODUCT DECLARATION

5 YEAR  
WARRANTY

Declare

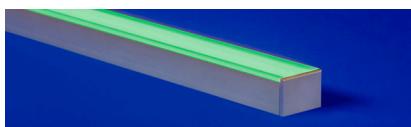

- Optically enhanced VERSatile fixture provides precision beam control for when precision lighting is needed
- The high-quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Features integrated metal endcaps
- Mounting options include a concealed clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER
VERS-05-RGB	6.0	RGB	DRY		

Sample Part Number: VERS-05-RGB-6.0-RGB-DRY-40D-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 MOUNTING	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

<b>1</b> <b>PRODUCT</b>  VERS-05-RGB  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  6.0 6.0W/ft	<b>3</b> <b>CCT</b>  RGB	<b>4</b> <b>RATED</b>  DRY IP20	<b>5</b> <b>LENS</b>  40D Optical 40° 50D Optical 50°  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  <b>SINGLE (Input only)</b> S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed  When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  CC Concealed Clip TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom  White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# VERS-OPTICS (05) RGB

## 24VDC Linear Fixtures - Surface & Recessed

### 1 PRODUCT - DIMENSIONS

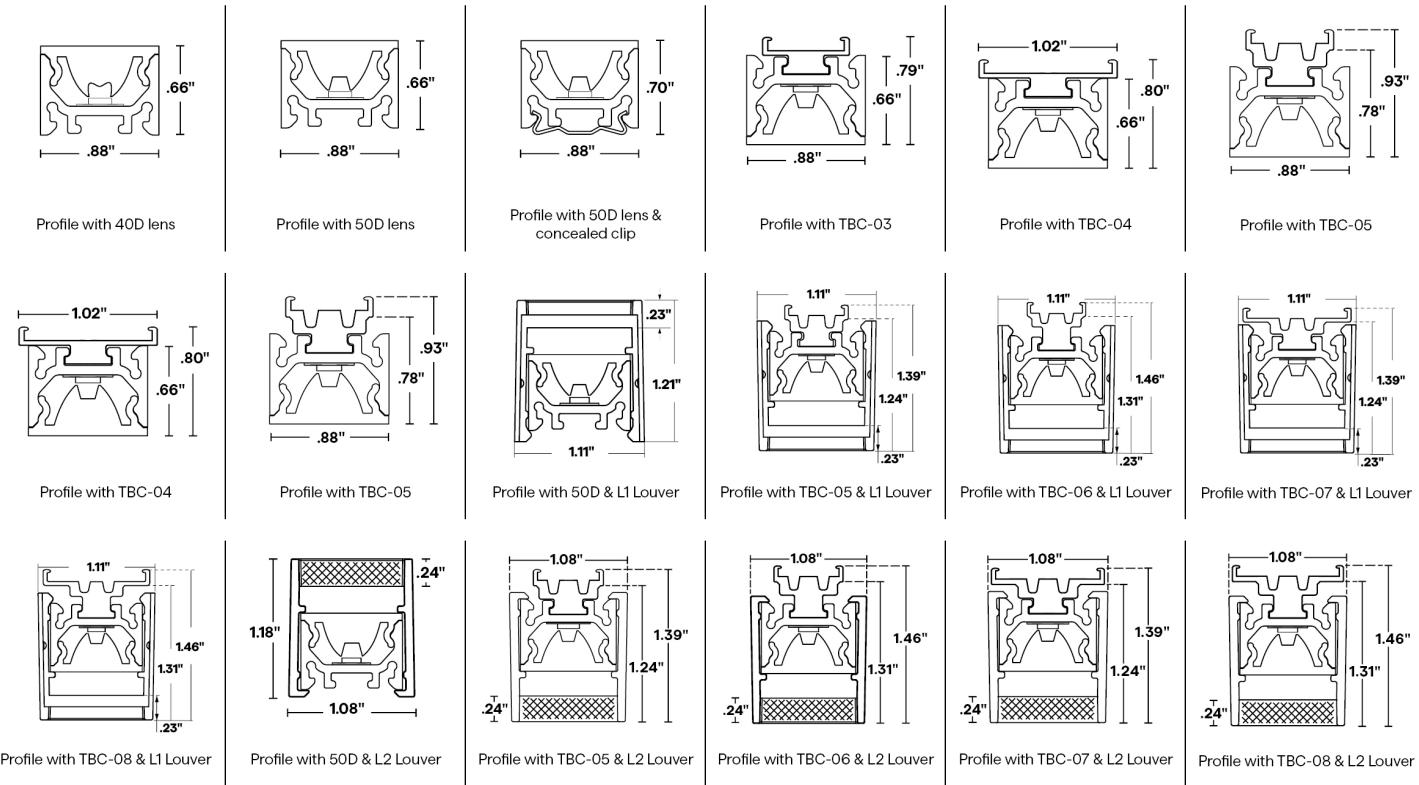

### 2 DELIVERED LUMENS

[Calculated L70 = 52000 hrs]  
Tested with VERS-05-RGB-6.0-RGB-DRY

	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT
40D	91	632	178	522	49	470	286
50D	93	632	182	523	49	470	292



# VERS-OPTICS (05) RGB

## 24VDC Linear Fixtures - Surface & Recessed


### 5 DIODE VISIBILITY



Optical lens

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.


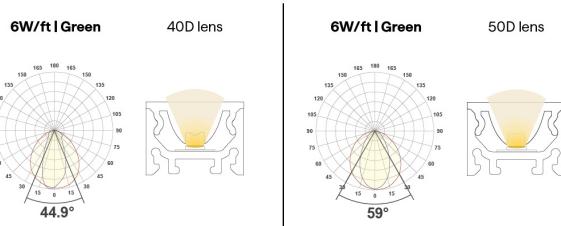


### TEMPERATURE RATINGS

		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	105°F


### 6 EXTERNAL LOUVER

#### PLASTIC

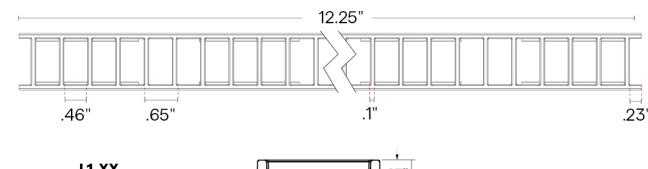



Lumen Multiplier

WH BK




Profile with plastic louver

#### METAL

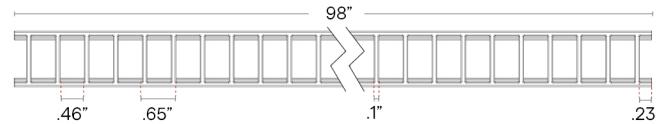

Lumen Multiplier

WH BK ST



Profile with metal louver




# VERS-OPTICS (05) RGB


## 24VDC Linear Fixtures - Surface & Recessed

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

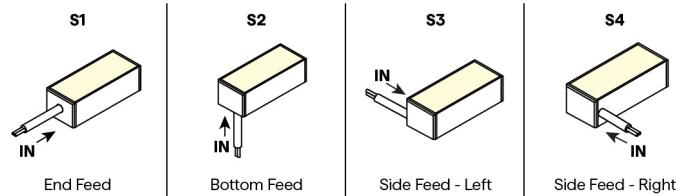


PASS THROUGH (Input/Output)

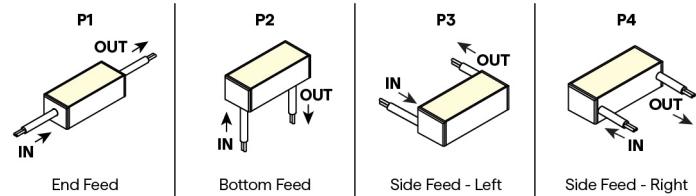


### CONFIGURATION OPTIONS

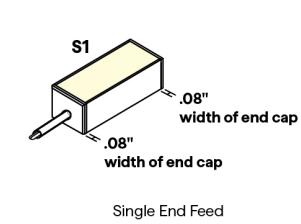


Single End Feed

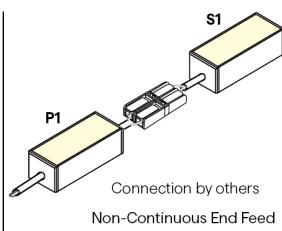


Connection by others  
Non-Continuous End Feed




Connection by others  
Non-Continuous Corner Feed




Continuous Bottom Feed

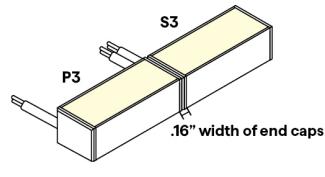

Continuous Side Feed - Left

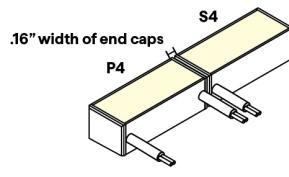


Continuous Side Feed - Right

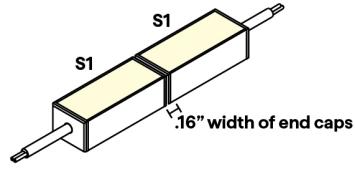

Continuous End to End Feed

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.













# VERS-OPTICS (05) RGB

## 24VDC Linear Fixtures - Surface & Recessed

### 12 MOUNTING

 <p><b>CC (CC-01)</b> Concealed Clip</p> <p>.18"  1.25"  .7" </p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-01 Each clips comes with a #4 x 5/8" Flat Head screw.</p>	 <p><b>CC (CC-02)</b> Louver Concealed Clip Required if L1 or L2 Louver is selected</p> <p>.21"  1.25"  .7" </p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-02 Each clips comes with a #4 x 5/8" Flat Head screw.</p>	 <p><b>TBC-03</b> Plastic T-Bar Clip</p> <p>.64"  .50"  .27" </p> <p>Use on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-04</b> Plastic T-Bar Clip</p> <p>1.02"  .50"  .27" </p> <p>Use on 15/16" Flat or Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-04 Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-05</b> Plastic T-Bar Clip</p> <p>.64"  .50"  .41" </p> <p>Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-05 Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>
 <p><b>TBC-06</b> Plastic T-Bar Clip</p> <p>.64"  .50"  .48" </p> <p>Use with Louver on 9/16" Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-06 Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-07</b> Plastic T-Bar Clip</p> <p>1.02"  .50"  .47" </p> <p>Use with Louver on 15/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-07 Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>	 <p><b>TBC-08</b> Plastic T-Bar Clip</p> <p>1.02"  .50"  .48" </p> <p>Use with Louver on 15/16" Tegular Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length To order separately use TBC-08 Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p>		
 <p>Satin Black Bronze White</p>				

### 13 FINISH



Custom color available




# VERS-OPTICS (05) RGB

## 24VDC Linear Fixtures - Surface & Recessed

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

#### Optimal Fixtures

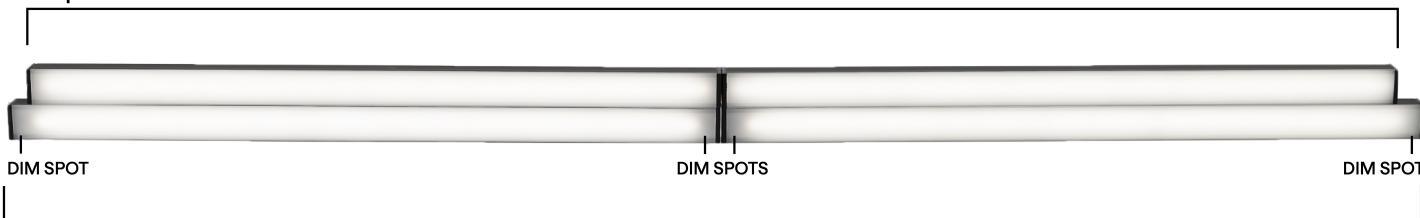

#### Exact Fixtures

### RGB DRY LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.59"	10.94"	10.49"	10.59"
13"	12.59"	12.94"	12.49"	12.59"
14"	12.59"	12.94"	12.49"	12.59"
15"	14.59"	14.94"	14.49"	14.59"
16"	14.59"	14.94"	14.49"	14.59"
17"	16.59"	16.94"	16.49"	16.59"
18"	16.59"	16.94"	16.49"	16.59"
19"	18.59"	18.94"	18.49"	18.59"
20"	18.59"	18.94"	18.49"	18.59"
21"	20.59"	20.94"	20.49"	20.59"
22"	20.59"	20.94"	20.49"	20.59"
23"	22.59"	22.94"	22.49"	22.59"
24"	22.59"	22.94"	22.49"	22.59"
36"	34.59"	34.94"	34.49"	34.59"
48"	46.59"	46.94"	46.49"	46.59"
60"	58.59"	58.94"	58.49"	58.59"
72"	70.59"	70.94"	70.49"	70.59"
84"	82.59"	82.94"	82.49"	82.59"
96"	94.59"	94.94"	94.49"	94.59"

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $+/- 5\%$  tolerance.

DIM TO LEVEL	INDOOR	
	RGB	
0.1%		QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%		QZ-DALI-DT8
10%		Non-Dim Power Supply with RGB App Dongle




# VERS-OPTICS (05) RGB

## 24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	RGB
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGB App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

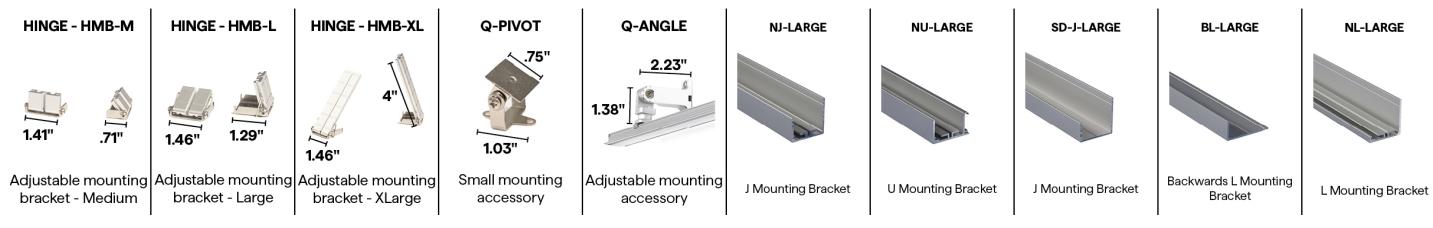


SD-L-LARGE



L Mounting Bracket

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity



## VERS-OPTICS (05) RGB

24VDC Linear Fixtures - Surface & Recessed

---

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage