



# Q-CAP ANYBEND™ STATIC WHITE

## 24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Both up/down bend and side bend
- Interior and exterior rated (not including FC)
- Four different mounting options
- Utilize clear endcaps for continuous runs
- 60% smaller than QTL's KURV fixture
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

### ORDERING PROCESS

**A** Specify Non-Field Cuttable Q-CAP

**B** (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

### A. NON-FIELD CUTTABLE Q-CAP

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: ANBD-SW-PPS-2-DRY-30-4.0-ENC/TL-P1A-BW-BW-N/A-48"-E

<b>A1</b> <b>PRODUCT</b>  <b>ANBD-SW</b> <b>ANBD-SW-USA</b>  Select USA option for BA, BAA and BABA projects.  See last page for compatible power supplies.	<b>A2</b> <b>MOUNTING</b>  PPS-2 PVC Clip PPS-96 PVC Channel PPS-LP-2 PVC Low Profile Clip PPS-LP-96 PVC Low Profile Channel WSC White Snug Clip BN-SB-SST-16' 16' BENDIT Side Stainless Steel Channel BN-SB-SST-32' 32' BENDIT Side Stainless Steel Channel BN-SB-WH-16' 16' BENDIT Side White Stainless Channel BN-SB-WH-32' 32' BENDIT Side White Stainless Channel BN-UD-SST-16' 16' BENDIT Up/Down Stainless Steel Channel BN-UD-SST-32' 32' BENDIT Up/Down Stainless Steel Channel BN-UD-WH-16' 16' BENDIT Up/Down White Stainless Channel BN-UD-WH-32' 32' BENDIT Up/Down White Stainless Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>A3</b> <b>RATED</b>  DRY IP20 WET IP67	<b>A4</b> <b>CCT</b>  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>A5</b> <b>WATTAGE</b>  1.0 1.0W-SO 2.0 2.0W-HO 4.0 4.0W-VHO  SO: Standard Output HO: High Output VHO: Very High Output
<b>A6</b> <b>LENS</b>  ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>A7</b> <b>WIRE INPUT/OUTPUT</b>  S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed  P1A Pass Through 1 (Input/Output) - End Feed P1B Pass Through 1 (Input/Output) - End Feed	<b>A8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>A9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	
<b>A10</b> <b>END CAPS</b>  CL Clear WH White  N/A Not Applicable	<b>A11</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 1" increments.	<b>A12</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		
Single				
Pass Through				

5 year warranty | Up/Down, Side Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



# Q-CAP ANYBEND™ STATIC WHITE

## 24VDC Flexible Fixtures

### B. FIELD CUTTABLE Q-CAP

B1 PRODUCT	B2 MOUNTING	B3 RATED	B4 CCT	B5 WATTAGE	B6 LENS	B7 WIRE INPUT/OUTPUT	B8 CONNECTOR/WIRE IN	B9 CONNECTOR/WIRE OUT	B10 END CAPS	B11 LENGTH (IN)	B12 EXACT/ OPTIMAL
ANBD-FC-SW	DRY								N/A	CL	48"

Sample Part Number: ANBD-SW-PPS-2-DRY-30-4.0-ENC/TL-P1A-BW-BW-N/A-48"-E


<b>B1</b> <b>PRODUCT</b>  ANBD-FC-SW  See last page for compatible power supplies.	<b>B2</b> <b>MOUNTING</b>  PPS-2 PVC Clip PPS-96 PVC Channel PPS-LP-2 PVC Low Profile Clip PPS-LP-96 PVC Low Profile Channel WSC White Snug Clip BN-SB-SST-16' 16' BENDIT Side Stainless Steel Channel BN-SB-SST-32' 32' BENDIT Side Stainless Steel Channel BN-SB-WH-16' 16' BENDIT Side White Stainless Channel BN-SB-WH-32' 32' BENDIT Side White Stainless Channel BN-UD-SST-16' 16' BENDIT Up/Down Stainless Steel Channel BN-UD-SST-32' 32' BENDIT Up/Down Stainless Steel Channel BN-UD-WH-16' 16' BENDIT Up/Down White Stainless Channel BN-UD-WH-32' 32' BENDIT Up/Down White Stainless Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>B3</b> <b>RATED</b>  DRY IP20	<b>B4</b> <b>CCT</b>  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>B5</b> <b>WATTAGE</b>  1.0 1.0W-SO 2.0 2.0W-HO 4.0 4.0W-VHO  SO: Standard Output HO: High Output VHO: Very High Output
<b>B6</b> <b>LENS</b>  ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>B7</b> <b>WIRE INPUT/OUTPUT</b>  S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed	<b>B8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>B9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	
<b>B10</b> <b>END CAPS</b>  CL Clear  Due to cutting, white endcaps are not available.	<b>B11</b> <b>LENGTH (IN)</b>  48" Nominal  Starting Run length is 48.475" for S1A & S1B Each cut point subtracts from the Starting Run Length 1.0, 2.0, & 4.0 has a 1" cut point S1A, S1B can be cut down to as little as 1.475"	<b>B12</b> <b>EXACT/OPTIMAL</b>  N/A		
<b>Single</b> ►				



# Q-CAP ANYBEND™ STATIC WHITE


## 24VDC Flexible Fixtures

### 1 PRODUCT - DIMENSIONS




Profile  
(Standard)


### BEND RADIUS

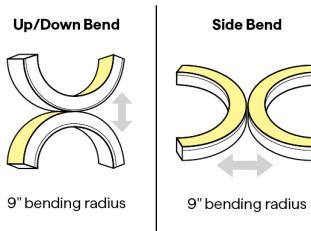


### FLEXIBILITY

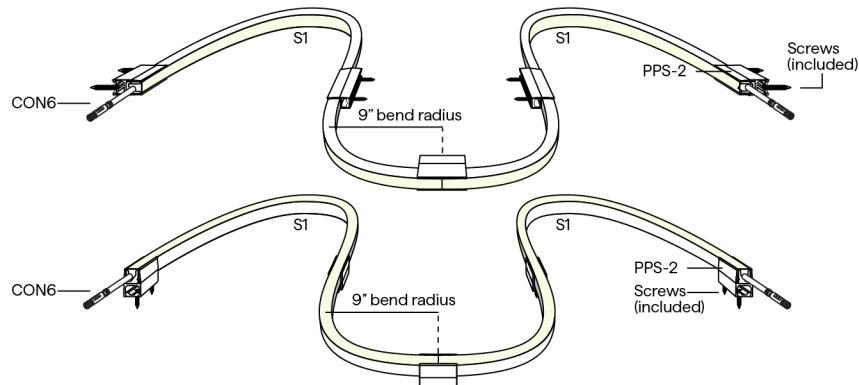


### 2 MOUNTING




White Snug Clip  
Indirect uplight  
To order separately use WSC-02  
Each clip comes with a #4x5/8" flat screw




To order separately use MICRO5-  
PPS2



To order separately use MICRO5-  
PPS-96  
Each clip comes with a #6" flat screw



To order separately use MICRO5-  
PPS-LP-2



To order separately use MICRO5-  
PPS-LP-96  
Each clip comes with a #6" flat screw




# Q-CAP ANYBEND™ STATIC WHITE

## 24VDC Flexible Fixtures

### MOUNTING CONTINUED

BN-SB




BENDIT Channel  
Horizontal Stainless Steel  
Flexible Channel

Continuous mounting solution for  
flexible fixtures, 16' or 32' field  
cuttable lengths

To order separately use either  
MICRO5-BN-SB-SST-16', MICRO5-  
BN-SB-SST-32', MICRO5-BN-SB-  
WH-16', or MICRO5-BN-SB-  
WH-32'

64 #4-40 1/2" screws provided per  
16'

BN-UD



BENDIT Channel  
Vertical Stainless Steel  
Flexible Channel

Continuous mounting solution for  
flexible fixtures, 16' or 32' field  
cuttable lengths

To order separately use either  
MICRO5-BN-UD-SST-16', MICRO5-  
BN-UD-SST-32', MICRO5-BN-UD-  
WH-16', or MICRO5-BN-UD-  
WH-32'

64 #4-40 1/2" screws provided per  
16'

### 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with ANBD-SW-WSC-DRY

CCT	1.0W/FT				2.0W/FT				4.0W/FT			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL		ENC/CL		ENC/TL	
LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM
2400K	44	93	49	92	120	93	131	92	260	93	253	93
2700K	48	96	32	98	133	97	85	98	283	97	186	98
3000K	52	95	47	96	140	95	127	97	300	96	217	97
3500K	51	98	41	98	137	98	109	98	296	97	247	98
4000K	46	97	53	98	122	97	138	98	275	96	304	97

### TEMPERATURE RATINGS

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	Min	Max	Min	Max	Min	Max
Surface Mounted	-4°F	135°F	-4°F	130°F	-4°F	105°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F

### BUG RATING

WATTAGE	B	U	G
1.0 (ALL CCTs), 2.0 (ALL CCTs), 4.0 (ALL CCTs)	B0	U1	G0




# Q-CAP ANYBEND™ STATIC WHITE


## 24VDC Flexible Fixtures

### 7 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

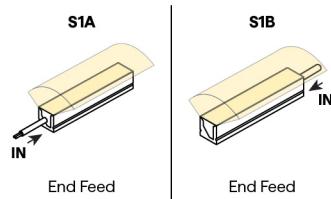


ASYMMETRIC ONLY PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

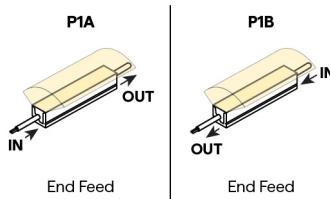

### CONFIGURATION OPTIONS

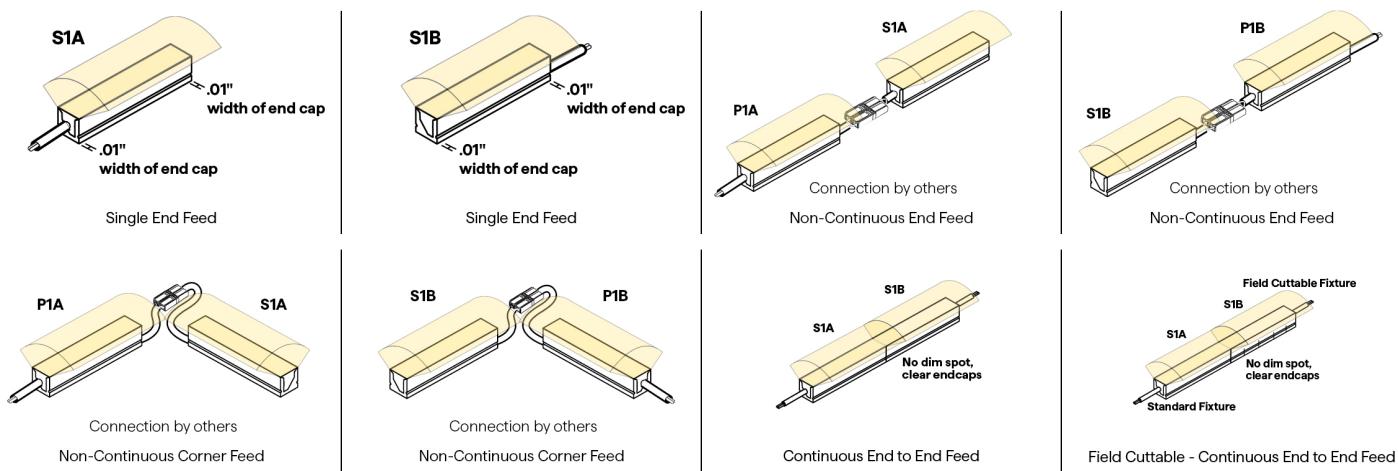

### FIELD CUTTABLE MARKING

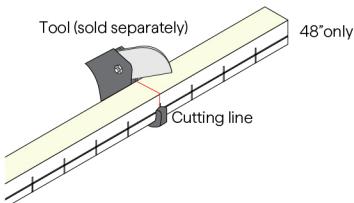


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

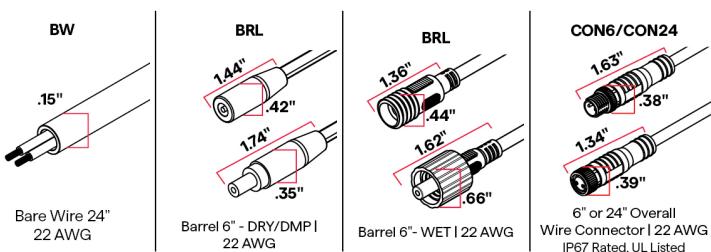





# Q-CAP ANYBEND™ STATIC WHITE

## 24VDC Flexible Fixtures

### 10 END CAPS (NO FEED)

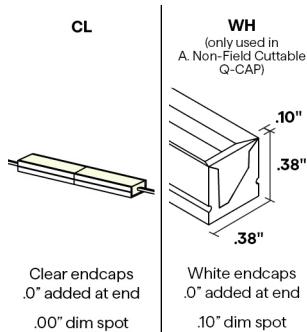


### END CAPS (WITH FEED)

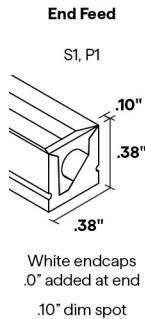

### 11 LENGTH - WIRING DETAIL

Available in 1" increments 12"-191"

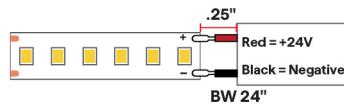


### 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

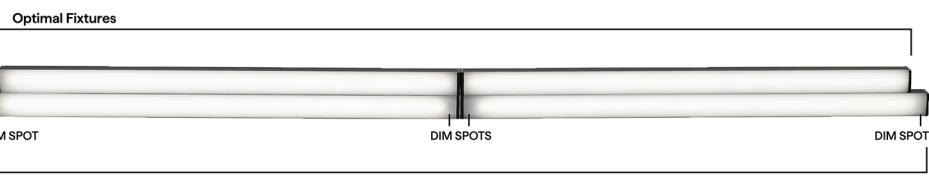

### SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1A/B	P1A/B
	S1	P1
12"	11.5"	11.5"
13"	12.5"	12.5"
14"	13.5"	13.5"
15"	14.5"	14.5"
16"	15.5"	15.5"
17"	16.5"	16.5"
18"	17.5"	17.5"
19"	18.5"	18.5"
20"	19.5"	19.5"
21"	20.5"	20.5"
22"	21.5"	21.5"
23"	22.5"	22.5"
24"	23.5"	23.5"
36"	35.5"	35.5"
48"	47.5"	47.5"
60"	59.5"	59.5"
72"	71.5"	71.5"
84"	83.5"	83.5"
96"	95.5"	95.5"



# Q-CAP ANYBEND™ STATIC WHITE

## 24VDC Flexible Fixtures

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	



# Q-CAP ANYBEND™ STATIC WHITE

## 24VDC Flexible Fixtures

### COMPATIBLE MOUNTING ACCESSORIES



### COMPATIBLE WIRING ACCESSORIES



### COMPATIBLE CONTROL ACCESSORIES



### COMPATIBLE APPS



Read and write  
DMX addresses and  
adjust voltage