



Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- When using DALI and DMX power supplies, LED wattage must be doubled
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

ORDERING PROCESS

A Specify Non-Field Cuttable Q-CAP

B (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

A1 PRODUCT	A2 MOUNTING	A3 RATED	A4 CCT	A5 WATTAGE	A6 LENS	A7 WIRE INPUT/OUTPUT	A8 CONNECTOR/WIRE IN	A9 CONNECTOR/WIRE OUT	A10 END CAPS	A11 LENGTH (IN)	A12 EXACT/OPTIMAL
					ENC/TL				TL		

Sample Part Number: LUME-01-DW-HE-MC-DRY-24/30-1.5HE-ENC/TL-P1-BW-BW-N/A-48"-E

A1 PRODUCT LUME-01-DW LUME-01-DW-USA Select USA option for BA, BAA and BABA projects. LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.	A2 MOUNTING MC PPS-LP-CL-2 PPS-LP-CL-96 WSC Magnetic Clip Clear PVC Clip Clear PVC Channel White Snug Clip White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	A3 RATED DRY IP20 WET IP67	A4 CCT 24/30 2400K/3000K 27/40 2700K/4000K	A5 WATTAGE 1.5HE 1.5WHE-SO 2.5HE 2.5WHE-HO SO: Standard Output HO: High Output
A6 LENS ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages	A7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed P1 Pass Through 1 (Input/Output) - End Feed	A8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120'. Request custom length by writing in part number next to BW (example: BW48)	A9 CONNECTOR/WIRE OUT N/A Closed End (No feed)	
Single ►				
Pass Through ►				
A10 END CAPS TL Translucent N/A Not Applicable	A11 LENGTH (IN) Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.	A12 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		

Warranty only valid with QTL power supplies | Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

B1 PRODUCT	B2 MOUNTING	B3 RATED	B4 CCT	B5 WATTAGE	B6 LENS	B7 WIRE INPUT/OUTPUT	B8 CONNECTOR/WIRE IN	B9 CONNECTOR/WIRE OUT	B10 END CAPS	B11 LENGTH (IN)	B12 EXACT/ OPTIMAL
LUME-01-FC-DW	DRY			ENC/TL	S1		N/A	TL	48"	N/A	

Sample Part Number: LUME-01-DW-HE-MC-DRY-24/30-1.5HE-ENC/TL-P1-BW-BW-N/A-48"-E


B1 PRODUCT LUME-01-FC-DW LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.	B2 MOUNTING MC Magnetic Clip PPS-LP-CL-2 Clear PVC Clip PPS-LP-CL-96 Clear PVC Channel WSC White Snug Clip White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	B3 RATED DRY IP20	B4 CCT 24/30 2400K/3000K 27/40 2700K/4000K	B5 WATTAGE 1.5HE 1.5WHE-SO 2.5HE 2.5WHE-HO SO: Standard Output HO: High Output
B6 LENS ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages	B7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed	B8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	B9 CONNECTOR/WIRE OUT N/A Closed End (No feed)	
B10 END CAPS TL Translucent	B11 LENGTH (IN) 48" Nominal Starting Run length is 48.475" for S1 Each cut point subtracts from the Starting Run Length 1.5HE & 2.5HE have a 2" cut point S1 can be cut down to as little as 2.475"	B12 EXACT/OPTIMAL N/A		
Single ►				



Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)


BEND RADIUS

Up/Down Bend



6" bending radius

FLEXIBILITY

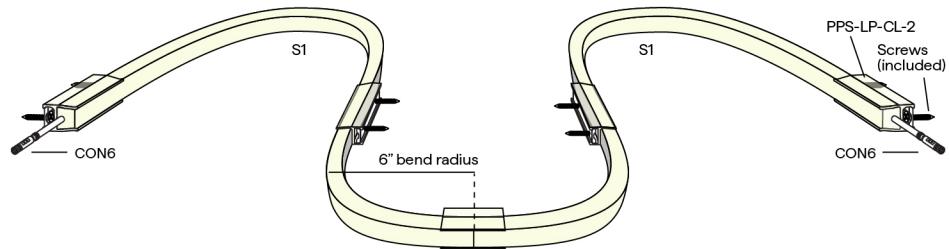

2 MOUNTING

WSC





Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

TEMPERATURE RATINGS


	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	140°F	-4°F	125°F	-4°F	125°F	-4°F	100°F
Storage Temp	-4°F	140°F	**	**	-4°F	140°F	**	**
Installation Temp	50°F	100°F	**	**	50°F	100°F	**	**

BUG RATING

WATTAGE	B	U	G
1.5HE (ALL CCTs), 2.5HE (ALL CCTs)	B0	U1	G0


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

P1




End Feed

CONFIGURATION OPTIONS




Single End Feed

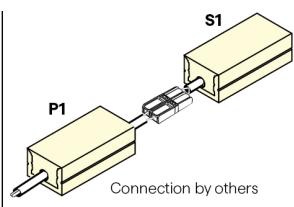


Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed



Continuous End to End Feed



Field Cuttable Fixture

Standard Fixture


Field Cuttable - Continuous End to End Feed



Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

FIELD CUTTABLE MARKING

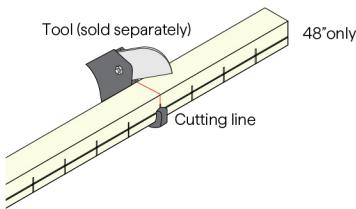


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment




Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps




10 END CAPS (NO FEED)



Translucent endcaps
.0" added at end
.00" dim spot

11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"



12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator](#) →

[E/O Explained](#) →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

DW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
12"	10.58"	10.95"
13"	12.58"	12.95"
14"	12.58"	12.95"
15"	14.58"	14.95"
16"	14.58"	14.95"
17"	16.58"	16.95"
18"	16.58"	16.95"
19"	18.58"	18.95"
20"	18.58"	18.95"
21"	20.58"	20.95"
22"	20.58"	20.95"
23"	22.58"	22.95"
24"	22.58"	22.95"
36"	34.58"	34.95"
48"	46.58"	46.95"
60"	58.58"	58.95"
72"	70.58"	70.95"
84"	82.58"	82.95"
96"	94.58"	94.95"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AVN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	



Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

COMPATIBLE MOUNTING ACCESSORIES



COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES





Q-CAP LUME-01 FOR WARM DIM APPLICATIONS

24VDC Flexible Fixtures

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage