




# Q-CAP LUME-01 STATIC WHITE

## 24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

### ORDERING PROCESS

**A** Specify Non-Field Cuttable Q-CAP

**B** (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

### A. NON-FIELD CUTTABLE Q-CAP

A1 PRODUCT	A2 MOUNTING	A3 RATED	A4 CCT	A5 WATTAGE	A6 LENS	A7 WIRE INPUT/OUTPUT	A8 CONNECTOR/WIRE IN	A9 CONNECTOR/WIRE OUT	A10 END CAPS	A11 LENGTH (IN)	A12 EXACT/ OPTIMAL
					ENC/TL				TL		

Sample Part Number: LUME-01-SW-MC-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E

<b>A1</b> <b>PRODUCT</b>  LUME-01-SW LUME-01-SW-USA  Select USA option for BA, BAA and BABA projects.  See last page for compatible power supplies.	<b>A2</b> <b>MOUNTING</b>  MC Magnetic Clip PPS-LP-CL-2 Clear PVC Clip PPS-LP-CL-96 Clear PVC Channel WSC White Snug Clip  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>A3</b> <b>RATED</b>  DRY IP20 WET IP67	<b>A4</b> <b>CCT</b>  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>A5</b> <b>WATTAGE</b>  1.5 1.5W-SO 3.0 3.0W-HO 5.0 5.0W-VHO 1.5HE 1.5WHE-SO 3.0HE 3.0WHE-HO 6.0HE 6.0WHE-VHO  SO: Standard Output HO: High Output VHO: Very High Output
<b>A6</b> <b>LENS</b>  ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>A7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed  P1 Pass Through 1 (Input/Output) - End Feed	<b>A8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>A9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	
<b>A10</b> <b>END CAPS</b>  Single ▶ TL Translucent  Pass Through ▶ N/A Not Applicable	<b>A11</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". SW: Available in 1" increments. SW-HE: Available in 2" increments.	<b>A12</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		

Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



# Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures

## B. FIELD CUTTABLE Q-CAP

B1 PRODUCT	B2 MOUNTING	B3 RATED	B4 CCT	B5 WATTAGE	B6 LENS	B7 WIRE INPUT/OUTPUT	B8 CONNECTOR/WIRE IN	B9 CONNECTOR/WIRE OUT	B10 END CAPS	B11 LENGTH (IN)	B12 EXACT/ OPTIMAL
LUME-01-FC-SW	DRY			ENC/TL	S1		N/A	TL	48"	N/A	

Sample Part Number: LUME-01-SW-MC-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E


<b>B1</b> <b>PRODUCT</b>  LUME-01-FC-SW  See last page for compatible power supplies.	<b>B2</b> <b>MOUNTING</b>  MC Magnetic Clip PPS-LP-CL-2 Clear PVC Clip PPS-LP-CL-96 Clear PVC Channel WSC White Snug Clip  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>B3</b> <b>RATED</b>  DRY IP20	<b>B4</b> <b>CCT</b>  24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	<b>B5</b> <b>WATTAGE</b>  1.5 1.5W-SO 3.0 3.0W-HO 5.0 5.0W-VHO 1.5HE 1.5WHE-SO 3.0HE 3.0WHE-HO 6.0HE 6.0WHE-VHO  SO: Standard Output HO: High Output VHO: Very High Output
<b>B6</b> <b>LENS</b>  ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>B7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed	<b>B8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>B9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	
<b>B10</b> <b>END CAPS</b>  TL Translucent	<b>B11</b> <b>LENGTH (IN)</b>  48" Nominal  Starting Run length is 48.475" for S1 Each cut point subtracts from the Starting Run Length 1.5, 3.0, & 5.0 have a 1" cut point 1.5HE, 3.0HE, & 6.0HE have a 2" cut point S1 can be cut down to as little as 1.475" for SW & 2.475" SW-HE	<b>B12</b> <b>EXACT/OPTIMAL</b>  N/A		
Single ►				



# Q-CAP LUME-01 STATIC WHITE

## 24VDC Flexible Fixtures

### 1 PRODUCT - DIMENSIONS



Profile  
(Standard)


### BEND RADIUS

#### Up/Down Bend



6" bending radius

### FLEXIBILITY

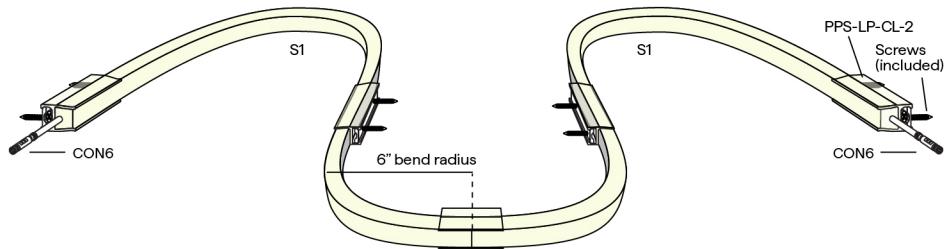

### 2 MOUNTING

#### WSC




White Snug Clip  
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

#### MC




Magnetic Clip  
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


#### PPS-LP-CL-2



Low profile PC Mounting  
Clip - Clear finish

To order separately use LUME-  
PPS-LP-CL-2

#### PPS-LP-CL-96



Low profile PC channel  
96" straight linear run  
Clear finish

To order separately use LUME-  
PPS-LP-CL-96

Each clip comes with a #8" flat  
screw

### 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with LUME-01-SW-WSC-DRY

CCT	1.5W/FT		15HE W/FT		3.0W/FT		3.0HE W/FT		5.0W/FT		6.0HE W/FT	
	ENC/TL		ENC/TL		ENC/TL		ENC/TL		ENC/TL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	74	92	77	93	137	92	164	93	232	92	378	93
2700K	66	97	68	97	132	97	186	97	229	98	369	97
3000K	73	95	84	95	142	95	180	95	239	95	387	95
3500K	82	98	82	97	155	98	178	97	225	98	394	97
4000K	65	97	79	97	130	97	170	97	229	97	397	97



# Q-CAP LUME-01 STATIC WHITE

## 24VDC Flexible Fixtures

### TEMPERATURE RATINGS


	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	130°F	-4°F	140°F	-4°F	125°F	-4°F	125°F	-4°F	105°F	-4°F	95°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F

### BUG RATING

WATTAGE	B	U	G
1.5 (ALL CCTs), 1.5HE (ALL CCTs)	B0	U1	G0
3.0 (ALL CCTs), 5.0 (ALL CCTs), 3.0HE (ALL CCTs)	B0	U2	G0
6.0HE (ALL CCTs)	B0	U2	G1


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed


### CONFIGURATION OPTIONS




Single End Feed

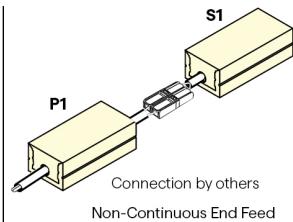


Connection by others  
Non-Continuous End Feed

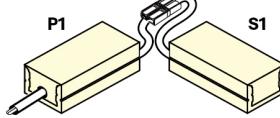

Connection by others  
Non-Continuous Corner Feed



Continuous End to End Feed




Field Cuttable - Continuous End to End Feed



# Q-CAP LUME-01 STATIC WHITE

## 24VDC Flexible Fixtures

### FIELD CUTTABLE MARKING

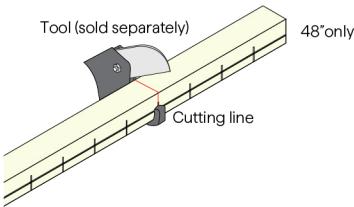


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment




**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

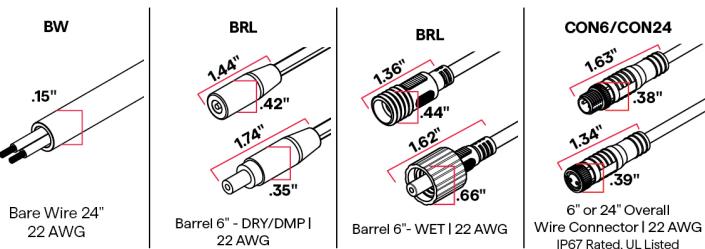


### 10 END CAPS (NO FEED)



### 11 LENGTH - WIRING DETAIL


TL

1.5W, 3.0W, 5.0W | Available in 1" increments 12"-191"

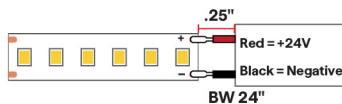

Translucent endcaps  
.0" added at end  
.00" dim spot

1.5HEW, 3.0HEW, 6.0HEW | Available in 2" increments 12"-191"

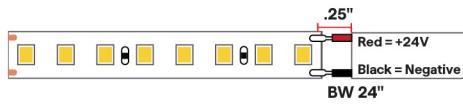


### 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator](#) →

[E/O Explained](#) →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

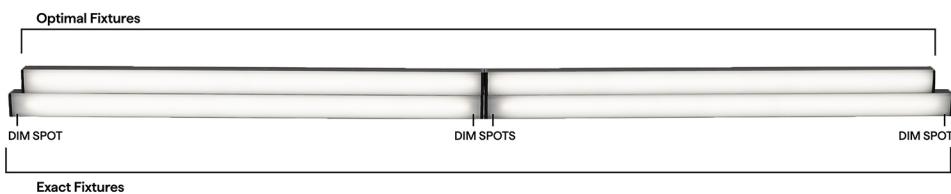



# Q-CAP LUME-01 STATIC WHITE

## 24VDC Flexible Fixtures

### SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
12"	 End Feed	 End Feed
13"	11.45"	11.7"
14"	12.45"	12.7"
15"	13.45"	13.7"
16"	14.45"	14.7"
17"	15.45"	15.7"
18"	16.45"	16.7"
19"	17.45"	17.7"
20"	18.45"	18.7"
21"	19.45"	19.7"
22"	20.45"	20.7"
23"	21.45"	21.7"
24"	22.45"	22.7"
36"	23.45"	23.7"
48"	35.45"	35.7"
60"	47.45"	47.7"
72"	59.45"	59.7"
84"	71.45"	71.7"
96"	83.45"	83.7"
	95.45"	95.7"

### SW-HE LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
12"	 End Feed	 End Feed
13"	10.45"	10.7"
14"	12.45"	12.7"
15"	12.45"	12.7"
16"	14.45"	14.7"
17"	16.45"	16.7"
18"	16.45"	16.7"
19"	18.45"	18.7"
20"	18.45"	18.7"
21"	20.45"	20.7"
22"	20.45"	20.7"
23"	22.45"	22.7"
24"	22.45"	22.7"
36"	34.45"	34.7"
48"	46.45"	46.7"
60"	58.45"	58.7"
72"	70.45"	70.7"
84"	82.45"	82.7"
96"	94.45"	94.7"



# Q-CAP LUME-01 STATIC WHITE

24VDC Flexible Fixtures

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		



# Q-CAP LUME-01 STATIC WHITE

## 24VDC Flexible Fixtures

### COMPATIBLE MOUNTING ACCESSORIES



### COMPATIBLE WIRING ACCESSORIES



### COMPATIBLE CONTROL ACCESSORIES



### COMPATIBLE APPS



Read and write  
DMX addresses and  
adjust voltage