




# Q-CAP WALA RGB

## 24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Side bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Four different mounting options
- Available in seamless configurations for a continuous line of light
- Utilize clear end caps for continuous runs
- 60% smaller than QTL's ZALA fixture
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

### ORDERING PROCESS

**A** Specify Non-Field Cuttable Q-CAP      **B** (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

#### A. NON-FIELD CUTTABLE Q-CAP

A1 PRODUCT	A2 MOUNTING	A3 RATED	A4 CCT	A5 WATTAGE	A6 LENS	A7 WIRE INPUT/OUTPUT	A8 CONNECTOR/WIRE IN	A9 CONNECTOR/WIRE OUT	A10 END CAPS	A11 LENGTH (IN)	A12 EXACT/ OPTIMAL
WALA-RGB			RGB	4.0							

Sample Part Number: **WALA-RGB-WSC-DRY-RGB-4.0-ENC/TL-P1-BW-BW-N/A-48"-E**

<b>A1</b> <b>PRODUCT</b>  WALA-RGB  See last page for compatible power supplies.	<b>A2</b> <b>MOUNTING</b>  PPS-2 PVC Clip PPS-96 PVC Channel PPS-LP-2 PVC Low Profile Clip PPS-LP-96 PVC Low Profile Channel WSC White Snug Clip BN-SB-SST-16' 16' BENDIT Side Stainless Steel Channel BN-SB-SST-32' 32' BENDIT Side Stainless Steel Channel BN-SB-WH-16' 16' BENDIT Side White Stainless Channel BN-SB-WH-32' 32' BENDIT Side White Stainless Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.  PPS mounting clip recommended for seamless applications	<b>A3</b> <b>RATED</b>  DRY IP20 WET IP67	<b>A4</b> <b>CCT</b>  RGB	<b>A5</b> <b>WATTAGE</b>  4.0 4.0-WO SO: Standard Output
<b>A6</b> <b>LENS</b>  ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>A7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S5 Single 5 (Input only) - Seamless Feed S6 Single 6 (Input only) - Seamless Feed  P1 Pass Through 1 (Input/Output) - End Feed P5 Pass Through 5 (Input/Output) - Seamless Feed P6 Pass Through 6 (Input/Output) - Seamless Feed	<b>A8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120'. Request custom length by writing in part number next to BW (example: BW48)	<b>A9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	
		 BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120'. Request custom length by writing in part number next to BW (example: BW48)		
<b>A10</b> <b>END CAPS</b>  Single CL Clear WH White  Pass Through N/A Not Applicable	<b>A11</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.	<b>A12</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.		

5 year warranty | Side Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



# Q-CAP WALA RGB

24VDC Flexible Fixtures

## B. FIELD CUTTABLE Q-CAP

B1 PRODUCT	B2 MOUNTING	B3 RATED	B4 CCT	B5 WATTAGE	B6 LENS	B7 WIRE INPUT/OUTPUT	B8 CONNECTOR/WIRE IN	B9 CONNECTOR/WIRE OUT	B10 END CAPS	B11 LENGTH (IN)	B12 EXACT/ OPTIMAL
WALA-FC-RGB	DRY	RGB	4.0					N/A	CL	48"	N/A

Sample Part Number: **WALA-RGB-WSC-DRY-RGB-4.0-ENC/TL-P1-BW-BW-N/A-48"-E**


<b>B1</b> <b>PRODUCT</b>  WALA-FC-RGB  See last page for compatible power supplies.	<b>B2</b> <b>MOUNTING</b>  PPS-2 PVC Clip PPS-96 PVC Channel PPS-LP-2 PVC Low Profile Clip PPS-LP-96 PVC Low Profile Channel WSC White Snug Clip BN-SB-SST-16' 16' BENDIT Side Stainless Steel Channel BN-SB-SST-32' 32' BENDIT Side Stainless Steel Channel BN-SB-WH-16' 16' BENDIT Side White Stainless Channel BN-SB-WH-32' 32' BENDIT Side White Stainless Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.  PPS mounting clip recommended for seamless applications	<b>B3</b> <b>RATED</b>  DRY IP20	<b>B4</b> <b>CCT</b>  RGB	<b>B5</b> <b>WATTAGE</b>  4.0 4.0W-SO  SO: Standard Output
<b>B6</b> <b>LENS</b>  ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>B7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S5 Single 5 (Input only) - Seamless Feed S6 Single 6 (Input only) - Seamless Feed	<b>B8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>B9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	
<b>B10</b> <b>END CAPS</b>  CL Clear  Due to cutting, white endcaps are not available.	<b>B11</b> <b>LENGTH (IN)</b>  48" Nominal  Starting Run length is 48.475" for S1, S5, & S6 Each cut point subtracts from the Starting Run Length 4.0 has a 2" cut point S1 can be cut down to as little as 2.475" S5 & S6 can be cut down to as little as 6.475"	<b>B12</b> <b>EXACT/OPTIMAL</b>  N/A		
<b>Single</b> ►				



# Q-CAP WALA RGB


## 24VDC Flexible Fixtures

### 1 PRODUCT - DIMENSIONS

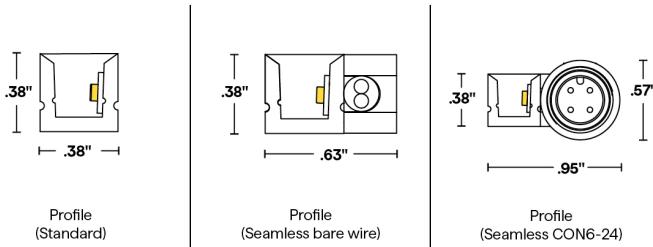


### BEND RADIUS

#### Side Bend




6" bending radius

### FLEXIBILITY

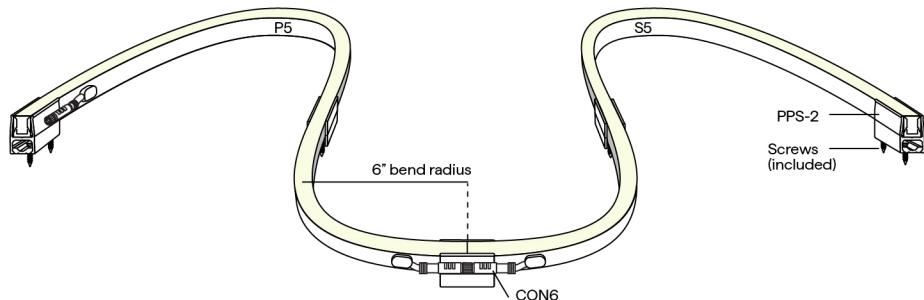

### 2 MOUNTING

#### WSC






## Q-CAP WALA RGB

### 24VDC Flexible Fixtures

## MOUNTING CONTINUED

BN-SB



BENDIT Channel  
Horizontal Stainless Steel  
Flexible Channel

Continuous mounting solution for  
flexible fixtures, 16' or 32' field  
cuttable lengths

To order separately use either  
MICRO5-BN-SB-SST-16', MICRO5-  
BN-SB-SST-32', MICRO5-BN-SB-  
WH-16', or MICRO5-BN-SB-  
WH-32'

64 #4-40 1/2" screws provided per  
16'

## 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with WALA-RGB-WSC-DRY

CCT	4.0W/FT Total Load					
	ENC/CL		ENC/TL		LM	Wavelength
	LM	Wavelength	LM	Wavelength		
Red	32	629	29	630		
Green	104	522	97	523		
Blue	31	473	28	471		
All	126	-	110	-		

## 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

## BUG RATING


WATTAGE	B	U	G
4.0 (ALL CCTs)	B0	U1	G0

## TEMPERATURE RATINGS

	4.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-4°F	110°F
Storage Temp	-4°F	140°F
Install Temp	50°F	100°F


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)



End Feed

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




End Feed




# Q-CAP WALA RGB

## 24VDC Flexible Fixtures








SEAMLESS SINGLE (Input only)

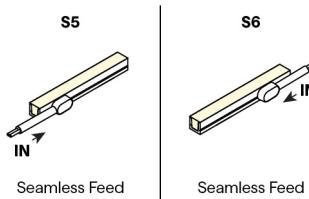


SEAMLESS PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

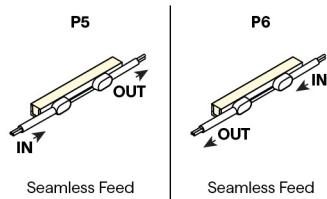

## CONFIGURATION OPTIONS

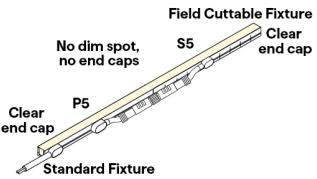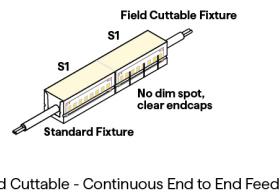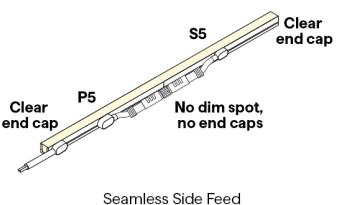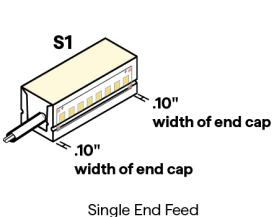

## FIELD CUTTABLE MARKING

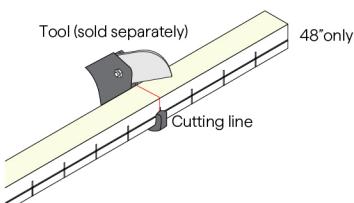

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.


## SEAMLESS

Shown with bare wire, connectors vary



## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

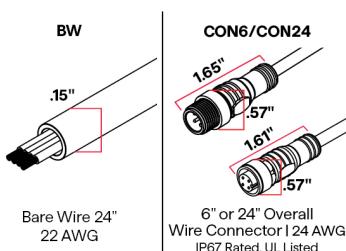





# Q-CAP WALA RGB

## 24VDC Flexible Fixtures

### 10 END CAPS (NO FEED)

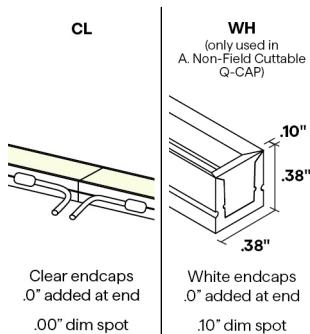


### END CAPS (WITH FEED)

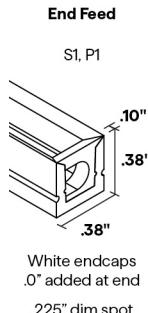

### 11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




### 12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

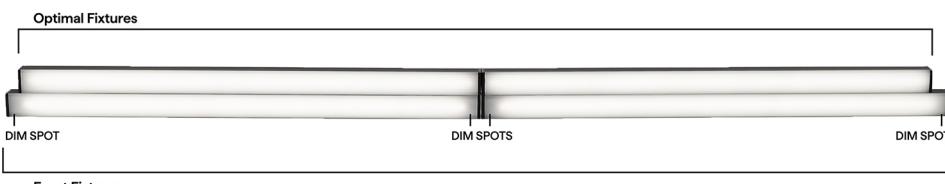

### RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 S1	P1 P1	S5 & P5 S5	P5
12"	10.63"	11"	10.25"	
13"	12.63"	13"	12.25"	
14"	12.63"	13"	12.25"	
15"	14.63"	15"	14.25"	
16"	14.63"	15"	14.25"	
17"	16.63"	17"	16.25"	
18"	16.63"	17"	16.25"	
19"	18.63"	19"	18.25"	
20"	18.63"	19"	18.25"	
21"	20.63"	21"	20.25"	
22"	20.63"	21"	20.25"	
23"	22.63"	23"	22.25"	
24"	22.63"	23"	22.25"	
36"	34.63"	35"	34.25"	
48"	46.63"	47"	46.25"	
60"	58.63"	59"	58.25"	
72"	70.63"	71"	70.25"	
84"	82.63"	83"	82.25"	
96"	94.63"	95"	94.25"	



# Q-CAP WALA RGB

## 24VDC Flexible Fixtures

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.


DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET+QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET+QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

### COMPATIBLE MOUNTING ACCESSORIES



### COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

### COMPATIBLE CONTROL ACCESSORIES





## Q-CAP WALA RGB

### 24VDC Flexible Fixtures

#### COMPATIBLE APPS

##### NFC APP



Read and write  
DMX addresses and  
adjust voltage