



Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures



Declare.



- Flexible encapsulated fixture
- Both helical bend and up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Two mounting options available
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

ORDERING PROCESS

A Specify Non-Field Cuttable Q-CAP

B (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

A1	A2	A3	A4	A5	A6
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS

ADDITIONAL INFORMATION REQUIRED TO ORDER

A7	A8	A9	A10	A11	A12
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH (IN)	EXACT/ OPTIMAL
			WH		

Sample Part Number: **WURM-SW-WSCS-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E**

A1

PRODUCT

WURM-SW

WURM-SW-USA

Select USA option for BA, BAA and BABA projects.

See last page for compatible power supplies.

A2

MOUNTING

MCS

WSCS

BN-UD-SST-16'

BN-UD-SST-32'

BN-UD-WH-16'

BN-UD-WH-32'

Magnetic Clip Small

White Snug Clip Small

16' BENDIT Up/Down Stainless Steel Channel

32' BENDIT Up/Down Stainless Steel Channel

16' BENDIT Up/Down White Stainless Channel

32' BENDIT Up/Down White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

A3

RATED

DRY

WET

IP20

IP67

A4

CCT

24

27

30

35

40

2400K

2700K

3000K

3500K

4000K

A5

WATTAGE

1.5

3.0

5.0

1.5W-SO

3.0W-HO

5.0W-VHO

SO: Standard Output

HO: High Output

VHO: Very High Output

A6

LENS

ENC/CL

ENC/TL

Encapsulated in Clear

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

A7

WIRE INPUT/OUTPUT

SINGLE (Input only)

S1

End Feed

A8

CONNECTOR/WIRE IN

BW

BRL

CON6

CON24

Bare Wire (Standard 24")

Barrel

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

A9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

A10

END CAPS

WH

N/A

White

Not Applicable

A11

LENGTH (IN)

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12".

SW: Available in 1" increments.

SW-HE: Available in 2" increments.

A12

EXACT/OPTIMAL

O

E

Optimal Illumination

Exact Specified Length

Exact fixtures are the exact length specified +0 – 1/8".

Optimal fixtures' length is rounded down with illumination end to end.

See Exact/Optimal Fixture Length charts.

5 year warranty | Up/Down & Helical Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than: SO - 125°F; HO - 115°F; VHO - 108°F | Patent # D846,786 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

B1

PRODUCT

WURM-FC-SW

See last page for compatible power supplies.

B2

MOUNTING

MCS
WSCS
BN-UD-SST-16'
BN-UD-SST-32'
BN-UD-WH-16'
BN-UD-WH-32'

Magnetic Clip Small
White Snug Clip Small
16' BENDIT Up/Down Stainless Steel Channel
32' BENDIT Up/Down Stainless Steel Channel
16' BENDIT Up/Down White Stainless Channel
32' BENDIT Up/Down White Stainless Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

B3

RATED

DRYIP20

B4

CCT

242400K
272700K
303000K
353500K
404000K

B5

WATTAGE

1.51.5W-SO
3.03.0W-HO
5.05.0W-VHO

SO: Standard Output
HO: High Output
VHO: Very High Output

B6

LENS

ENC/CLENC/TL

Encapsulated in Clear
Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

SINGLE (Input only)
S1End Feed

B8

CONNECTOR/WIRE IN

BWBRL
CON6
CON24

Bare Wire (Standard 24")
Barrel
Connector 6"
Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/AClosed End (No feed)

B10

END CAPS

WHWhite

Due to cutting, white endcaps are not available.

B11

LENGTH (IN)

48"Nominal

Starting Run length is 48.38" for S1
Each cut point subtracts from the Starting Run Length
1.5, 3.0, & 5.0 have a 1" cut point
1.5HE, 3.0HE, & 6.0HE have a 2" cut point
S1 can be cut down to as little as 1.38" for SW & 2.38" for SW-HE

B12

EXACT/OPTIMAL

N/A

B7

WIRE INPUT/ OUTPUT

B8

CONNECTOR/ WIRE IN

B9

CONNECTOR/ WIRE OUT

N/A

B10

END CAPS

WH

B11

LENGTH (IN)

48"

B12

EXACT/ OPTIMAL

N/A


Sample Part Number: WURM-SW-WSCS-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E



Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)


BEND RADIUS

Up/Down Bend




6" bending radius

Helical Bend




6" bending radius
Max recommended rotation
of 1 rotation per 16'

FLEXIBILITY

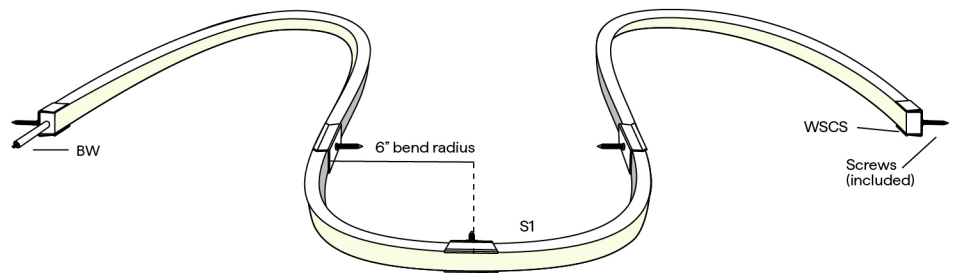

2 MOUNTING

WSCS




White Snug Clip Small
Indirect uplight

To order separately use WSCS

Each clip comes with a #6x5/8" flat
screw

MCS




Magnetic Clip Small
Cove use only

To order separately use MCS

each clip comes with a #6x1 1/4" screw

BN-UD



BENDIT Channel
Vertical Stainless Steel
Flexible Channel

Continuous mounting solution for
flexible fixtures, 16' or 32' field
cuttable lengths

To order separately use either
STND-QCAP-BN-UD-S-SST-16',
STND-QCAP-BN-UD-S-SST-32',
STND-QCAP-BN-UD-S-WH-16', or
STND-QCAP-BN-UD-S-WH-32'

64 #4-40 1/2" screws provided per
16'



Q-CAP WURM™ STATIC WHITE


24VDC Flexible Fixtures

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with WURM-SW-WSCS-DRY

CCT	1.5W/FT		1.5HE W/FT		3.0W/FT		3.0HE W/FT		5.0W/FT		6.0HE W/FT	
	ENC/CL		ENC/CL		ENC/CL		ENC/CL		ENC/CL		ENC/CL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	127	94	184	93	231	93	336	93	329	94	584	93
2700K	127	97	174	95	227	98	331	95	329	98	569	96
3000K	135	99	172	96	242	98	345	96	337	98	602	96
3500K	144	96	201	98	242	96	368	98	359	97	648	98
4000K	151	96	187	96	262	96	378	97	370	97	652	97

6 DIODE VISIBILITY

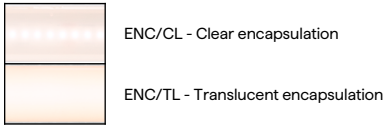

TEMPERATURE RATINGS

	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	120°F	-4°F	105°F	-4°F	100°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F


BUG RATING

WATTAGE	B	U	G
1.5 (ALL CCTs), 3.0 (ALL CCTs), 5.0 (ALL CCTs)	B0	U1	G0
1.5HE (ALL CCTs), 3.0HE (ALL CCTs)	B0	U1	G0
6.0HE (2400K, 2700K, 3000K, 4000K)	B0	U1	G1
6.0HE (3500K)	B0	U2	G1

7 WIRE INPUT/OUTPUT

SINGLE (Input only)


S1



End Feed

PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP

P1




End Feed




Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures


CONFIGURATION OPTIONS




Single End Feed




Connection by others
Non-Continuous End Feed



Connection by others
Non-Continuous Corner Feed




Continuous End to End Feed




Field Cuttable - Continuous End to End Feed

FIELD CUTTABLE MARKING

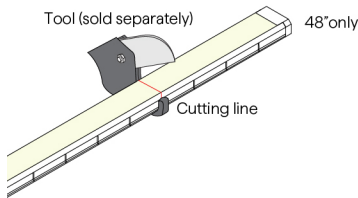


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment




Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps




Bare Wire 24"
22 AWG



Barrel 6" - DRY/DMP |
22 AWG




Barrel 6" - WET | 22 AWG



6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 END CAPS (NO FEED)

WH
(only used in
A. Non-Field Cuttable
Q-CAP)




White endcaps
.11" added at end
.24" dim spot

END CAPS (WITH FEED)

End Feed

S1, P1



White endcaps
.0" added at end
.38" dim spot


11 LENGTH - WIRING DETAIL




Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures

1.5W, 3.0W, 5.0W | Available in 1" increments 12"-191"




1.5HEW, 3.0HEW, 6.0HEW | Available in 2" increments 12"-191"



12 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

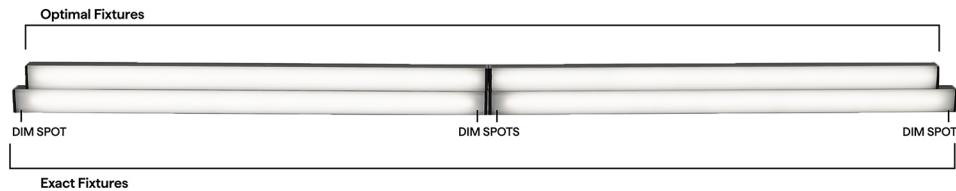



SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
		
12"	11.45"	11.7"
13"	12.45"	12.7"
14"	13.45"	13.7"
15"	14.45"	14.7"
16"	15.45"	15.7"
17"	16.45"	16.7"
18"	17.45"	17.7"
19"	18.45"	18.7"
20"	19.45"	19.7"
21"	20.45"	20.7"
22"	21.45"	21.7"
23"	22.45"	22.7"
24"	23.45"	23.7"
36"	35.45"	35.7"
48"	47.45"	47.7"
60"	59.45"	59.7"
72"	71.45"	71.7"
84"	83.45"	83.7"
96"	95.45"	95.7"



Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures

SW-HE LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
		
12"	10.45"	10.7"
13"	12.45"	12.7"
14"	12.45"	12.7"
15"	14.45"	14.7"
16"	14.45"	14.7"
17"	16.45"	16.7"
18"	16.45"	16.7"
19"	18.45"	18.7"
20"	18.45"	18.7"
21"	20.45"	20.7"
22"	20.45"	20.7"
23"	22.45"	22.7"
24"	22.45"	22.7"
36"	34.45"	34.7"
48"	46.45"	46.7"
60"	58.45"	58.7"
72"	70.45"	70.7"
84"	82.45"	82.7"
96"	94.45"	94.7"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	



Q-CAP WURM™ STATIC WHITE


24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

NJ-MEDIUM	SD-L-MEDIUM	iQ-QCAP-UNV-CUTTER
		
J Mounting Bracket	L Mounting Bracket	QTL recommended FC Cutter

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	BARREL-EXT	BARREL FOUR-FER	CON120-EXT	CON FOUR-FER
					
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET



Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage