



# Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS

## 24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Both up/down bend and side bend
- Interior and exterior rated (not including FC)
- Four different mounting options
- Utilize clear endcaps for continuous runs
- 60% smaller than QTL's KURV fixture
- When using DALI and DMX power supplies, LED wattage must be doubled
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures
- IK10 impact rated

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT	5 WATTAGE	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 END CAPS	11 LENGTH
				2.0				N/A		48"

Sample Part Number: **ANBD-DW-PPS-2-DRY-24/30-2.0-ENC/TL-P1A-BW-BW-N/A-48"-E**

<b>1</b> <b>PRODUCT</b>  <b>ANBD-DW</b> <b>ANBD-DW-USA</b>  Select USA option for BA, BAA and BABA projects.  LED engine is built with 3 wires requiring 0-100% DMX or DALI control. Using DALI or DMX non QTL power supplies may double wattage. See last page for compatible power supplies.	<b>2</b> <b>MOUNTING</b>  PPS-2 PVC Clip PPS-96 PVC Channel PPS-LP-2 PVC Low Profile Clip PPS-LP-96 PVC Low Profile Channel WSC White Snug Clip BN-SB-SST-16' 16' BENDIT Side Stainless Steel Channel BN-SB-SST-32' 32' BENDIT Side Stainless Steel Channel BN-SB-WH-16' 16' BENDIT Side White Channel BN-SB-WH-32' 32' BENDIT Side White Channel BN-UD-SST-16' 16' BENDIT Up/Down Stainless Steel Channel BN-UD-SST-32' 32' BENDIT Up/Down Stainless Steel Channel BN-UD-WH-16' 16' BENDIT Up/Down White Channel BN-UD-WH-32' 32' BENDIT Up/Down White Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>3</b> <b>RATED</b>  DRY IP20 WET IP67	<b>4</b> <b>CCT</b>  24/30 2400K/3000K 27/40 2700K/4000K
<b>5</b> <b>WATTAGE</b>  2.0 2.0W-SO SO: Standard Output	<b>6</b> <b>LENS</b>  ENC/CL Encapsulated in Clear ENC/TL Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed	
<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  N/A Closed End (No feed)	<b>10</b> <b>END CAPS</b>  CL Clear WH White	<b>11</b> <b>LENGTH</b>  48" Optimal  Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.


Warranty only valid with QTL power supplies | 5 year warranty | Up/Down, Side Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



# Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS


## 24VDC Flexible Fixtures

### 1 PRODUCT - DIMENSIONS




Profile  
(Standard)


### BEND RADIUS




### FLEXIBILITY

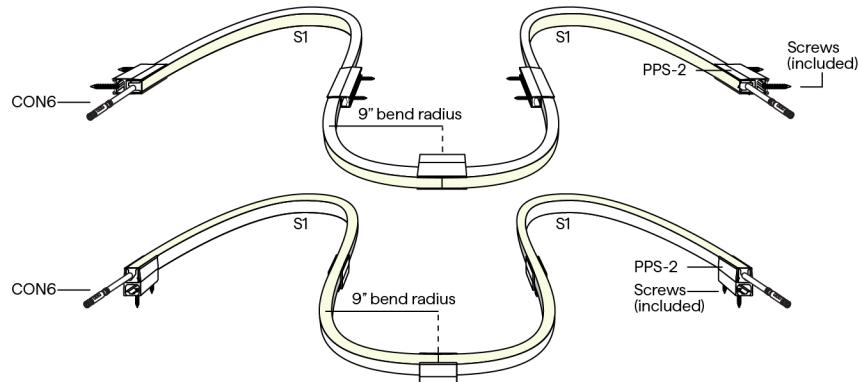


### 2 MOUNTING




White Snug Clip  
Indirect uplight  
To order separately use WSC-02  
Each clip comes with a #4x5/8" flat  
screw




To order separately use MICRO5-  
PPS2



To order separately use MICRO5-  
PPS-96  
Each clip comes with a #6" flat  
screw



Low profile PVC  
Mounting Clip  
To order separately use MICRO5-  
PPS-LP-2




Low profile PVC channel  
96" straight linear run  
To order separately use MICRO5-  
PPS-LP-96  
Each clip comes with a #6" flat  
screw




## Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS

### 24VDC Flexible Fixtures

#### MOUNTING CONTINUED

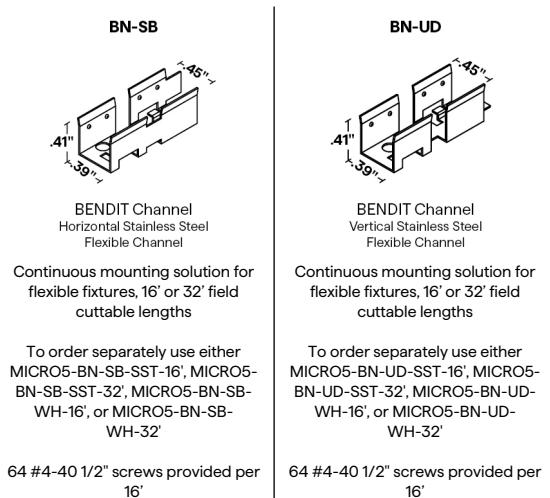

#### 6 DIODE VISIBILITY

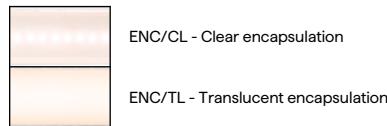

[Calculated L70 = 40000 hrs]  
Tested with ANBD-DW-WSC-DRY

CCT	2.0W/FT Total Load				Circuit Wattage
	ENC/CL		ENC/TL		
	LM	CRI	LM	CRI	LM
2400K	140	94	135	93	1.90
2700K	140	94	130	92	1.90
3000K	148	96	136	96	1.90
3500K	158	98	138	98	1.90
4000K	46	97	53	98	122

#### TEMPERATURE RATINGS

	DW 2.0 W/FT		DW 4.0 W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	110°F
Storage Temp	-4°F	140°F	-4°F	140°F
Install Temp	50°F	100°F	50°F	100°F

#### BUG RATING

WATTAGE	B	U	G
2.0 (ALL CCTs)	B0	U1	G0




# Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS


24VDC Flexible Fixtures

## 7 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

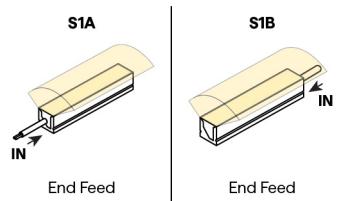

ASYMMETRIC ONLY PASS THROUGH (Input/Output)



## CONFIGURATION OPTIONS

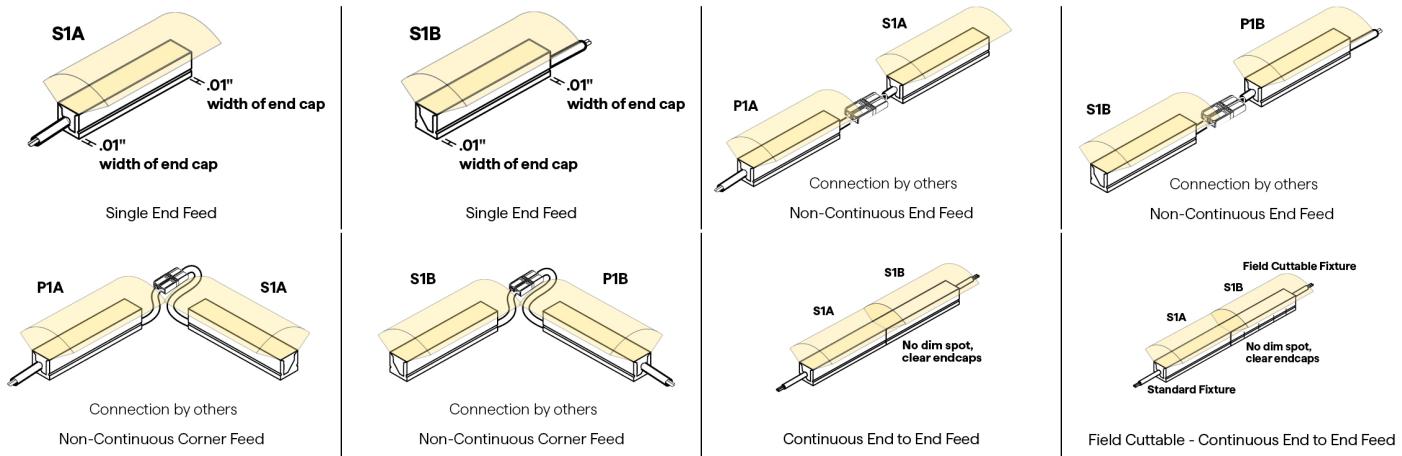




# Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS

## 24VDC Flexible Fixtures

### FIELD CUTTABLE MARKING

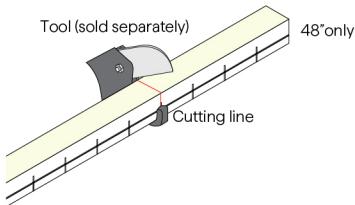


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment




**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

### 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



### 10 END CAPS (NO FEED)




### END CAPS (WITH FEED)



### 11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"






# Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS

## 24VDC Flexible Fixtures

### 12 EXACT/OPTIMAL FIXTURE LENGTH

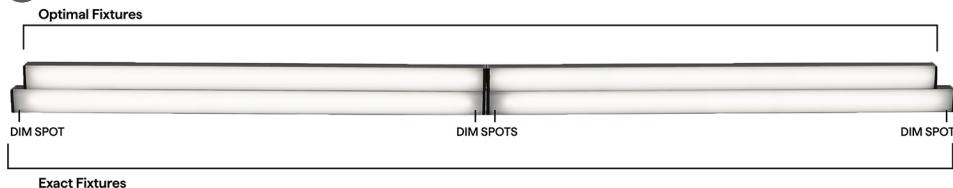

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

### DW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1A/B 	P1A/B 
12"	10.63"	11"
13"	12.63"	13"
14"	12.63"	13"
15"	14.63"	15"
16"	14.63"	15"
17"	16.63"	17"
18"	16.63"	17"
19"	18.63"	19"
20"	18.63"	19"
21"	20.63"	21"
22"	20.63"	21"
23"	22.63"	23"
24"	22.63"	23"
36"	34.63"	35"
48"	46.63"	47"
60"	58.63"	59"
72"	70.63"	71"
84"	82.63"	83"
96"	94.63"	95"

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 5\%$  tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-DW Tunable Applications	MICRO 5-DW Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



# Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS


24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-DW Tunable Applications	MICRO 5-DW Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
<b>DMX</b> LED wattage must be doubled for DW-HE products		Q-SET-QZ-DMX
<b>DALI-2: DT6</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
<b>DALI-2: DT8</b> LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
<b>SCENE App Dimmed</b>	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES



## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature  
junction box, DRY/DMP  
(WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity



## Q-CAP ANYBEND™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

---

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage