

Q-CAP LUME-01 RGB

24VDC Flexible Fixtures





- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT	5 WATTAGE	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 END CAPS	11 LENGTH
LUME-01-RGB					ENC/TL			N/A	TL	

Sample Part Number: **LUME-01-RGB-MC-DRY-RGB-6.0-ENC/TL-P1-BW-BW-N/A-48"-E**

1 PRODUCT

LUME-01-RGB

See last page for compatible power supplies.

2 MOUNTING

MC	Magnetic Clip
PPS-LP-CL-2	Clear PVC Clip
PPS-LP-CL-96	Clear PVC Channel
WSC	White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

3 RATED

DRY	IP20
WET	IP67

4 CCT

5 WATTAGE

6 LENS

ENC/TL	Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

7 WIRE INPUT/OUTPUT

S1	Single 1 (Input only) - End Feed
S5	Single 5 (Input only) - Seamless Feed

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

N/A	Closed End (No feed)

10 END CAPS

TL	Translucent

11 LENGTH

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12".
Available in 2" increments.

Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-24-26

Q-CAP LUME-01 RGB

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)

2 MOUNTING

WSC




White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


PPS-LP-CL-2



Low profile PC Mounting Clip - Clear finish

To order separately use LUME-PPS-LP-CL-2

PPS-LP-CL-96



Low profile PC channel 96" straight linear run
Clear finish

To order separately use LUME-PPS-LP-CL-96

Each clip comes with a #8" flat screw

4/5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LUME-01-RGB-WSC-DRY

CCT	6.0W/FT Total Load		
	ENC/TL		Circuit Wattage
	LM	Wavelength	
Red	43	632	2.4
Green	109	522	1.9
Blue	29	469	1.7
All	169	***	6.0

6 DIODE VISIBILITY

ENC/TL - Translucent encapsulation

BUG RATING

WATTAGE	B	U	G
5.0 (ALL CCTs)	B0	U1	G0

TEMPERATURE RATINGS

	5.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-14°F	90°F
Storage Temp	-4°F	140°F
Installation Temp	50°F	100°F

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-08-24-26

Q-CAP LUME-01 RGB

24VDC Flexible Fixtures


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed

SEAMLESS SINGLE (Input only)




Seamless Feed

SEAMLESS PASS THROUGH (Input/Output)




Seamless Feed


CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed



Non-Continuous Corner Feed




Continuous End to End Feed



Field Cuttable - Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

10 END CAPS (NO FEED)


TL



Translucent endcaps
.0" added at end

.00" dim spot

12 EXACT/OPTIMAL FIXTURE LENGTH

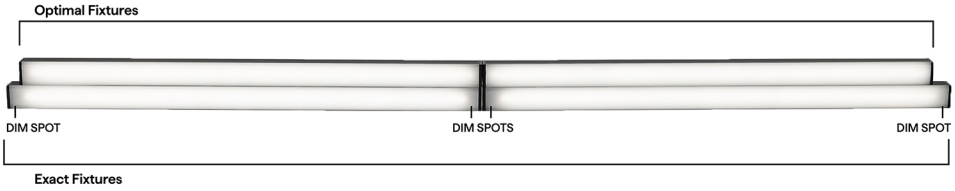

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1  End Feed	P1  End Feed
12"	10.58"	10.95"
13"	12.58"	12.95"
14"	12.58"	12.95"
15"	14.58"	14.95"
16"	14.58"	14.95"
17"	16.58"	16.95"
18"	16.58"	16.95"
19"	18.58"	18.95"
20"	18.58"	18.95"
21"	20.58"	20.95"
22"	20.58"	20.95"
23"	22.58"	22.95"
24"	22.58"	22.95"
36"	34.58"	34.95"
48"	46.58"	46.95"
60"	58.58"	58.95"
72"	70.58"	70.95"
84"	82.58"	82.95"
96"	94.58"	94.95"

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

COMPATIBLE MOUNTING ACCESSORIES

Q-ANGLE



Adjustable mounting accessory


iQ-QCAP-UNV-CUTTER



QTL recommended FC Cutter

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-24-26

Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved