

# Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures






- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

| 1 PRODUCT | 2 MOUNTING | 3 RATED | 4 CCT | 5 WATTAGE | 6 LENS | 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 END CAPS | 11 LENGTH |
|---|---|---|---|---|---|---|---|---|---|---|
| LUME-01-SC | | | | | ENC/TL | | | N/A | TL | |

Sample Part Number: **LUME-01-SC-MC-DRY-G-5.0-ENC/TL-P1-BW-BW-N/A-48"-E**

### 1 PRODUCT

**LUME-01-SC**

See last page for compatible power supplies.

### 2 MOUNTING

| | |
|---|---|
| **MC** | Magnetic Clip |
| **PPS-LP-CL-2** | Clear PVC Clip |
| **PPS-LP-CL-96** | Clear PVC Channel |
| **WSC** | White Snug Clip |

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

### 3 RATED

| | |
|---|---|
| **DRY** | IP20 |
| **WET** | IP67 |

### 4 CCT

### 5 WATTAGE

### 6 LENS

| | |
|---|---|
| **ENC/TL** | Encapsulated in Translucent |

For representation of LED visibility, see Diode Visibility section on following pages

### 7 WIRE INPUT/OUTPUT

| | |
|---|---|
| **S1** | Single 1 (Input only) - End Feed |
| **S5** | Single 5 (Input only) - Seamless Feed |

### 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 9 CONNECTOR/WIRE OUT

| | |
|---|---|
| **N/A** | Closed End (No feed) |

### 10 END CAPS

| | |
|---|---|
| **TL** | Translucent |

### 11 LENGTH

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12".
Available in 2" increments.

Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-08-24-26

# Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures


## 1 PRODUCT - DIMENSIONS




Profile
(Standard)

## 2 MOUNTING

**WSC**





White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

**MC**





Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


**PPS-LP-CL-2**




Low profile PC Mounting Clip - Clear finish

To order separately use LUME-PPS-LP-CL-2

**PPS-LP-CL-96**




Low profile PC channel
96" straight linear run
Clear finish

To order separately use LUME-PPS-LP-CL-96

Each clip comes with a #8" flat screw

## 4/5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LUME-01-SC-**...-DRY

| CCT | 5.0W/FT ENC/TL | |
|---|---|---|
| | LM | Wavelength |
| Red | 71 | 635 |
| Green | 266 | 516 |
| Blue | 63 | 466 |
| Amber | 61 | 596 |

## 6 DIODE VISIBILITY

ENC/TL - Translucent encapsulation

## BUG RATING

| WATTAGE | B | U | G |
|---|---|---|---|
| 6.0 (RED, BLUE) | B0 | U1 | G0 |
| 6.0 (GREEN, ALL) | B0 | U2 | G0 |

## TEMPERATURE RATINGS

| | 5.0 W/FT | |
|---|---|---|
| | Min | Max |
| Ambient Operating Temp - Surface | -4°F | 105°F |
| Storage Temp | -4°F | 140°F |
| Installation Temp | 50°F | 100°F |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


Specification subject to change. Rev-08-24-26

# Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)





End Feed

PASS THROUGH (Input/Output)





End Feed

SEAMLESS SINGLE (Input only)





Seamless Feed

SEAMLESS PASS THROUGH (Input/Output)





Seamless Feed


## CONFIGURATION OPTIONS





Single End Feed





Non-Continuous End Feed




Non-Continuous Corner Feed





Continuous End to End Feed





Field Cuttable - Continuous End to End Feed

## 8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps





Bare Wire 24"
22 AWG




Barrel 6" - DRY/DMP | 22 AWG




Barrel 6"- WET | 22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

## 10 END CAPS (NO FEED)


TL



Translucent endcaps
.0" added at end

.00" dim spot

## 12 EXACT/OPTIMAL FIXTURE LENGTH

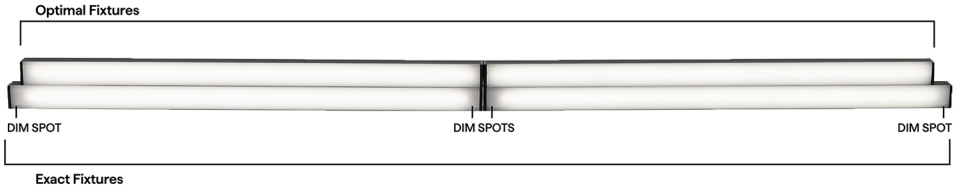


**Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.**



## SC LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

**EXACT LENGTH**

| Requested Length | Potential dim spot on either end of fixture |
|---|---|
| 12" | 1" |
| 13" | .5" |
| 14" | 1" |
| 15" | .5" |
| 16" | 1" |
| 17" | .5" |
| 18" | 1" |
| 19" | .5" |
| 20" | 1" |
| 21" | .5" |
| 22" | 1" |
| 23" | .5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

**OPTIMAL LENGTH: highlighted rows are closest to requested nominal length**

| Requested Nominal Length | S1   End Feed | P1   End Feed |
|---|---|---|
| 12" | 10.45" | 10.7" |
| 13" | 12.45" | 12.7" |
| 14" | 12.45" | 12.7" |
| 15" | 14.45" | 14.7" |
| 16" | 14.45" | 14.7" |
| 17" | 16.45" | 16.7" |
| 18" | 16.45" | 16.7" |
| 19" | 18.45" | 18.7" |
| 20" | 18.45" | 18.7" |
| 21" | 20.45" | 20.7" |
| 22" | 20.45" | 20.7" |
| 23" | 22.45" | 22.7" |
| 24" | 22.45" | 22.7" |
| 36" | 34.45" | 34.7" |
| 48" | 46.45" | 46.7" |
| 60" | 58.45" | 58.7" |
| 72" | 70.45" | 70.7" |
| 84" | 82.45" | 82.7" |
| 96" | 94.45" | 94.7" |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | OUTDOOR |
|---|---|---|
| | SC | SC |
| Dim to Black | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | QOM-DC+CAP<br>QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V |
| 1% | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | |

| DIMMING PROTOCOL | INDOOR | OUTDOOR |
|---|---|---|
| | SC | SC |
| Non-Dim | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND |
| Phase | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q-SET-QZ-PH/0-10V<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V |
| 0-10V | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | |
| ECO System | QTM-eLED(E) | |
| DMX | QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

## COMPATIBLE MOUNTING ACCESSORIES

**Q-ANGLE**




Adjustable mounting accessory

**iQ-QCAP-UNV-CUTTER**



QTL recommended FC Cutter


## COMPATIBLE WIRING ACCESSORIES

**Q-mini-J**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**Q-mini-J5**




UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

**BARREL-EXT**



8ft barrel cable extender DRY ONLY

**BARREL FOUR-FER**



Splits lead from one to four LED Barrel connector fixtures, DRY/DMP

**CON120-EXT**



10ft Con cable extender DRY/DMP/WET

**CON FOUR-FER**



Splits lead from one to four LED Con connectors DRY/DMP/WET

## COMPATIBLE APPS

**NFC APP**




Read and write DMX addresses and adjust voltage

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting