




Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

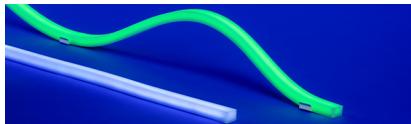

- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT	5 WATTAGE	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 END CAPS	11 LENGTH
LUME-01-SC				5.0	ENC/TL	S1		N/A	TL	48"

Sample Part Number: LUME-01-SC-MC-DRY-G-5.0-ENC/TL-P1-BW-BW-N/A-48"-E

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT
LUME-01-SC See last page for compatible power supplies.	MC PPS-LP-CL-2 PPS-LP-CL-96 WSC White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	DRY WET IP20 IP67	A B G R Amber Blue Green Red
5 WATTAGE	6 LENS	7 WIRE INPUT/OUTPUT	
5.0 5.0W-VHO VHO: Very High Output	ENC/TL Encapsulated in Translucent For representation of LED visibility, see Diode Visibility section on following pages	S1 Single 1 (Input only) - End Feed	
8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 END CAPS	11 LENGTH
BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	N/A Closed End (No feed)	TL Translucent	48" Optimal Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2' increments.


Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)


BEND RADIUS

Up/Down Bend




6" bending radius

FLEXIBILITY

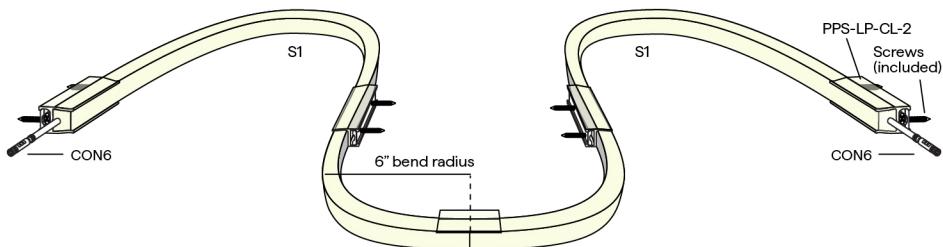

2 MOUNTING

WSC




White Snug Clip
Indirect upright

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


PPS-LP-CL-2



Low profile PC Mounting
Clip - Clear finish

To order separately use LUME-
PPS-LP-CL-2

PPS-LP-CL-96



Low profile PC channel
96" straight linear run
Clear finish

To order separately use LUME-
PPS-LP-CL-96

Each clip comes with a #8" flat
screw

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LUME-01-SC-**-DRY

CCT	5.0W/FT	
	ENC/TL	Wavelength
Red	71	635
Green	266	516
Blue	63	466
Amber	61	596

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation



Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

BUG RATING


WATTAGE	B	U	G
6.0 (RED, BLUE)	B0	U1	G0
6.0 (GREEN, ALL)	B0	U2	G0

TEMPERATURE RATINGS

5.0 W/FT	
Min	Max
Ambient Operating Temp - Surface	-4°F 105°F
Storage Temp	-4°F 140°F
Installation Temp	50°F 100°F


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed



Continuous End to End Feed



Standard Fixture


Field Cuttable - Continuous End to End Feed



Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures


FIELD CUTTABLE MARKING

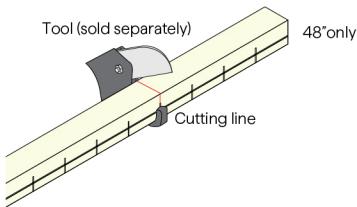

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment




Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

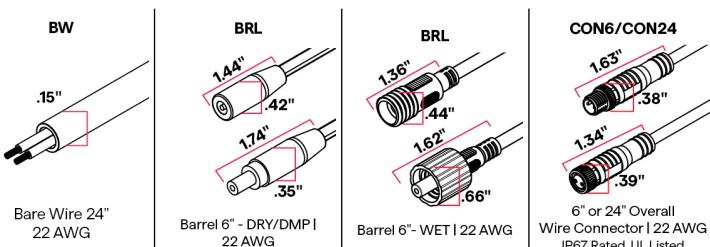

10 END CAPS (NO FEED)


TL



Translucent endcaps
.0" added at end
.00" dim spot

11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"






Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

12 EXACT/OPTIMAL FIXTURE LENGTH

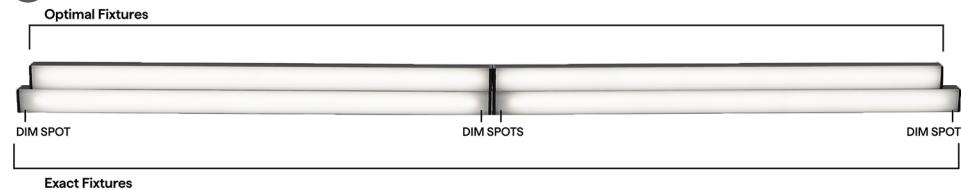

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

SC LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $\pm 0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
12"	10.45"	10.7"
13"	12.45"	12.7"
14"	12.45"	12.7"
15"	14.45"	14.7"
16"	14.45"	14.7"
17"	16.45"	16.7"
18"	16.45"	16.7"
19"	18.45"	18.7"
20"	18.45"	18.7"
21"	20.45"	20.7"
22"	20.45"	20.7"
23"	22.45"	22.7"
24"	22.45"	22.7"
36"	34.45"	34.7"
48"	46.45"	46.7"
60"	58.45"	58.7"
72"	70.45"	70.7"
84"	82.45"	82.7"
96"	94.45"	94.7"



Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SC	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	


DIMMING PROTOCOL	INDOOR	OUTDOOR
	SC	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	



Q-CAP LUME-01 STATIC COLOR

24VDC Flexible Fixtures

COMPATIBLE MOUNTING ACCESSORIES



QTL recommended FC Cutter

COMPATIBLE WIRING ACCESSORIES



COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage