





Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures



Declare.



- Flexible encapsulated fixture
- Side bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Four different mounting options
- Available in seamless configurations for a continuous line of light
- Utilize clear end caps for continuous runs
- 60% smaller than QTL's ZALA fixture
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

1	2	3	4	5	6	7	8	9	10	11
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	END CAPS	LENGTH
								N/A		48"

Sample Part Number: **WALA-SW-WSC-DRY-30-4.0-ENC/TL-P1-BW-BW-N/A-48"-E**

1

PRODUCT

WALA-SW

WALA-SW-USA

Select USA option for BA, BAA and BABA projects.

See last page for compatible power supplies.

2

MOUNTING

PPS-2

PPS-96

PPS-LP-2

PPS-LP-96

WSC

BN-SB-SST-16'

BN-SB-SST-32'

BN-SB-WH-16'

BN-SB-WH-32'

PVC Clip

PVC Channel

PVC Low Profile Clip

PVC Low Profile Channel

White Snug Clip

16' BENDIT Side Stainless Steel Channel

32' BENDIT Side Stainless Steel Channel

16' BENDIT Side White Channel

32' BENDIT Side White Channel

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

PPS mounting clip recommended for seamless applications

3

RATED

DRY

WET

IP20

IP67

4

CCT

24

27

30

35

40

2400K

2700K

3000K

3500K

4000K

5

WATTAGE

1.0

2.0

4.0

1.0W-SO

2.0W-HO

4.0W-VHO

SO: Standard Output

HO: High Output

VHO: Very High Output

6

LENS

ENC/CL

ENC/TL

Encapsulated in Clear

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

7

WIRE INPUT/OUTPUT

S1

S5

S6

Single 1 (Input only) - End Feed

Single 5 (Input only) - Seamless Feed

Single 6 (Input only) - Seamless Feed

8

CONNECTOR/WIRE IN

BW

BRL

CON6

CON24

Bare Wire (Standard 24")

Barrel

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

10

END CAPS

CL

WH

Clear

White

11

LENGTH

48"

Optimal

Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 1" increments.


5 year warranty | Side Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut




Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS




Profile
(Standard)



Profile
(Seamless bare wire)




Profile
(Seamless barrel)



Profile
(Seamless CON6-24)


BEND RADIUS

Side Bend




6" bending radius

FLEXIBILITY

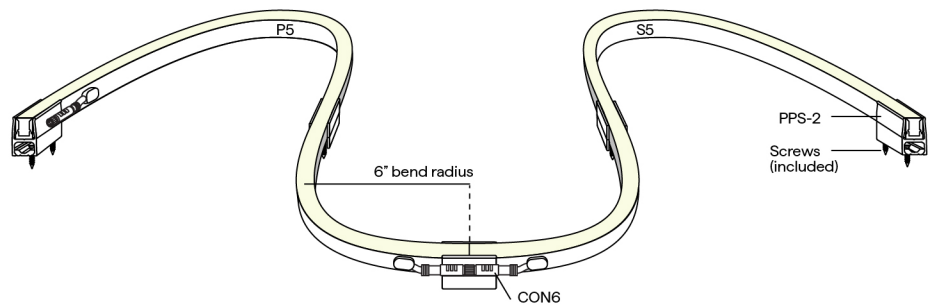

2 MOUNTING


WSC



White Snug Clip
Indirect uplight

To order separately use WSC-02
Each clip comes with a #4x5/8" flat screw


PPS-2



PVC Mounting Clip

To order separately use MICRO5-PPS2

PPS-96




96" straight linear run

To order separately use MICRO5-PPS-96

Each clip comes with a #6" flat screw


PPS-LP-2



Low profile PVC
Mounting Clip

To order separately use MICRO5-PPS-LP-2

PPS-LP-96



Low profile PVC channel
96" straight linear run

To order separately use MICRO5-PPS-LP-96

Each clip comes with a #6" flat screw




Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures

MOUNTING CONTINUED

BN-SB



BENDIT Channel
Horizontal Stainless Steel
Flexible Channel

Continuous mounting solution for flexible fixtures, 16' or 32' field cuttable lengths

To order separately use either MICRO5-BN-SB-SST-16', MICRO5-BN-SB-SST-32', MICRO5-BN-SB-WH-16', or MICRO5-BN-SB-WH-32'


64 #4-40 1/2" screws provided per 16'

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with WALA-SW-WSC-DRY

CCT	1.0W/FT				2.0W/FT				4.0W/FT			
	ENC/CL		ENC/TL		ENC/CL		ENC/TL		ENC/CL		ENC/TL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	39	93	38	93	102	93	97	92	259	93	246	93
2700K	40	94	35	96	104	93	92	95	263	94	239	96
3000K	40	96	39	96	105	96	103	96	271	97	266	96
3500K	41	98	39	98	107	98	102	98	268	98	263	98
4000K	43	98	42	98	112	98	111	98	289	97	285	97

6 DIODE VISIBILITY

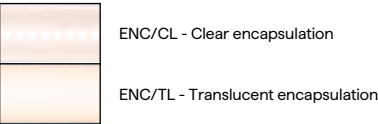

TEMPERATURE RATINGS

	1.0 W/FT		2.0 W/FT		4.0 W/FT	
	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	130°F	-4°F	105°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F

BUG RATING

WATTAGE	B	U	G
1.0 (ALL CCTs), 2.0 (ALL CCTs), 4.0 (ALL CCTs)	B0	U1	G0




Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed

SEAMLESS SINGLE (Input only)




Seamless Feed




Seamless Feed

SEAMLESS PASS THROUGH (Input/Output)




Seamless Feed




Seamless Feed


CONFIGURATION OPTIONS




Single End Feed




Continuous End to End Feed




Connection by others
Non-Continuous End Feed




Field Cuttable - Continuous End to End Feed



Connection by others
Non-Continuous Corner Feed



Field Cuttable - Seamless Side Feed

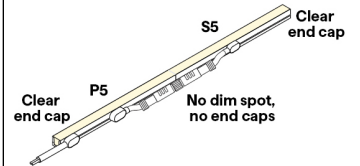


Seamless Side Feed




Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures

FIELD CUTTABLE MARKING

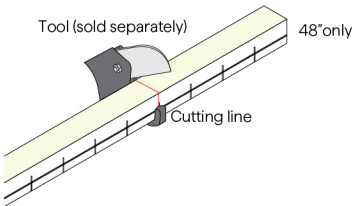


Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures. Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.

SEAMLESS


Shown with bare wire, connectors vary




Omnidirectional wireways
S5, S6, P5, P6

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

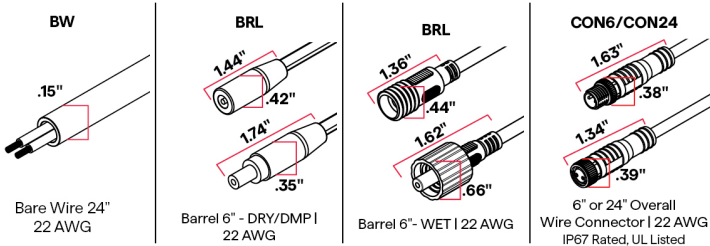


10 END CAPS (NO FEED)



END CAPS (WITH FEED)



11 LENGTH - WIRING DETAIL






Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures

12 EXACT/OPTIMAL FIXTURE LENGTH

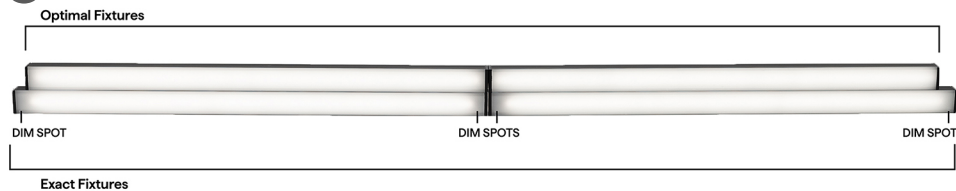

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

OPTIMAL LENGTH

Requested Nominal Length	S1	P1	S5 & P5	
				
12"	11.5"	11.75"	11.25"	
13"	12.5"	12.75"	12.25"	
14"	13.5"	13.75"	13.25"	
15"	14.5"	14.75"	14.25"	
16"	15.5"	15.75"	15.25"	
17"	16.5"	16.75"	16.25"	
18"	17.5"	17.75"	17.25"	
19"	18.5"	18.75"	18.25"	
20"	19.5"	19.75"	19.25"	
21"	20.5"	20.75"	20.25"	
22"	21.5"	21.75"	21.25"	
23"	22.5"	22.75"	22.25"	
24"	23.5"	23.75"	23.25"	
36"	35.5"	35.75"	35.25"	
48"	47.5"	47.75"	47.25"	
60"	59.5"	59.75"	59.25"	
72"	71.5"	71.75"	71.25"	
84"	83.5"	83.75"	83.25"	
96"	95.5"	95.75"	95.25"	



Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	




Q-CAP WALA STATIC WHITE

24VDC Flexible Fixtures

COMPATIBLE MOUNTING ACCESSORIES

QUOVA-MICRO	NJ-MICRO	BL-MICRO	NL-MICRO	SD-L-MICRO	iq-QCAP-UNV-CUTTER
					
QUOVA Knife Edge	J Mounting Bracket	Backwards L Mounting Bracket	L Mounting Bracket	L Mounting Bracket	QTL recommended FC Cutter

COMPATIBLE WIRING ACCESSORIES

Q-mini-J	Q-mini-J5	BARREL-EXT	BARREL FOUR-FER	CON120-EXT	CON FOUR-FER
					
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	8ft barrel cable extender DRY ONLY	Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	10ft Con cable extender DRY/DMP/WET	Splits lead from one to four LED Con connectors DRY/DMP/WET

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE

Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage