




Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures



Declare.



- Flexible encapsulated fixture
- Both helical bend and up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Two mounting options available
- When using DALI and DMX power supplies, LED wattage must be doubled
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

1	2	3	4	5	6	7	8	9	10	11
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT / OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	END CAPS	LENGTH
					ENC/CL	S1		N/A	WH	48"

Sample Part Number: **WURM-DW-WSCS-DRY-24/30-1.5HE-ENC/CL-P1-BW-BW-N/A-48"-E**

1 PRODUCT WURM-DW WURM-DW-USA Select USA option for BA, BAA and BABA projects. LED engine is built with 3 wires requiring 0-10v, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See last page for compatible power supplies.	2 MOUNTING MCS Magnetic Clip Small WSCS White Snug Clip Small BN-UD-SST-16' 16' BENDIT Up/Down Stainless Steel Channel BN-UD-SST-32' 32' BENDIT Up/Down Stainless Steel Channel BN-UD-WH-16' 16' BENDIT Up/Down White Channel BN-UD-WH-32' 32' BENDIT Up/Down White Channel White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	3 RATED DRY IP20 WET IP67	4 CCT 24/30 2400K/3000K 27/40 2700K/4000K
5 WATTAGE 1.5HE 1.5WHE-SO 2.5HE 2.5WHE-HO SO: Standard Output HO: High Output	6 LENS ENC/CL Encapsulated in Clear For representation of LED visibility, see Diode Visibility section on following pages	7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed	
8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT N/A Closed End (No feed)	10 END CAPS WH White	11 LENGTH 48" Optimal Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2' increments.


5 year warranty | Warranty only valid with QTL power supplies | Up/Down & Helical Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than: 1.5HE - 125°F; 2.5HE - 115°F | Patent # D846,786 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions



Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)


BEND RADIUS

Up/Down Bend




6" bending radius

Helical Bend




6" bending radius
Max recommended rotation
of 1 rotation per 16'

FLEXIBILITY

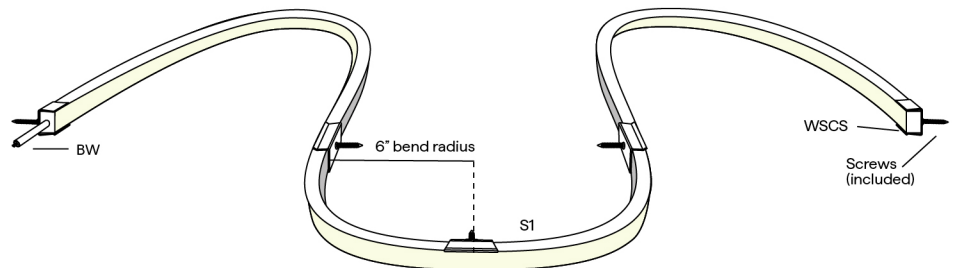

2 MOUNTING

WSCS




White Snug Clip Small
Indirect uplight

To order separately use WSCS

Each clip comes with a #6x5/8" flat
screw

MCS




Magnetic Clip Small
Cove use only

To order separately use MCS

each clip comes with a #6x1 1/4"
screw

BN-UD



BENDIT Channel
Vertical Stainless Steel
Flexible Channel

Continuous mounting solution for
flexible fixtures, 16' or 32' field
cuttable lengths

To order separately use either
STND-QCAP-BN-UD-S-SST-16',
STND-QCAP-BN-UD-S-SST-32',
STND-QCAP-BN-UD-S-WH-16', or
STND-QCAP-BN-UD-S-WH-32'

64 #4-40 1/2" screws provided per
16'



Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with WURM-DW-WSCS-DRY

CCT	1.5HE W/FT		2.5 HE W/FT	
	ENC/CL		ENC/CL	
	LM	CRI	LM	CRI
2400K	133	92	198	92
2700K	126	96	201	97
3000K	132	97	206	97
4000K	142	97	225	98

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

TEMPERATURE RATINGS

	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	140°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
Storage Temp	-4°F	140°F	**	**	-4°F	140°F	**	**
Installation Temp	50°F	100°F	**	**	50°F	100°F	**	**


BUG RATING

WATTAGE	B	U	G
6.0 (ALL CCTs), 3.0HE (ALL CCTs), 5.0HE (ALL CCTs)	B0	U1	G0

7 WIRE INPUT/OUTPUT

SINGLE (Input only)


S1



End Feed

PASS THROUGH (Input/Output)

P1








End Feed



Q-CAP WURM™ FOR TUNABLE APPLICATIONS


24VDC Flexible Fixtures

CONFIGURATION OPTIONS




Field Cuttable - Continuous End to End Feed

FIELD CUTTABLE MARKING

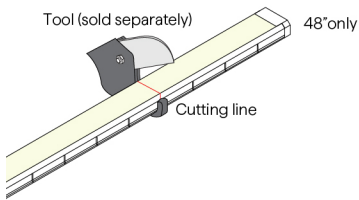

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures


8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps



10 END CAPS (NO FEED)

WH
(only used in
A. Non-Field Cuttable
Q-CAP)




White endcaps
.11" added at end
.24" dim spot

END CAPS (WITH FEED)

End Feed

S1, P1



White endcaps
.0" added at end
.38" dim spot


11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"



12 EXACT/OPTIMAL FIXTURE LENGTH

Optimal Fixtures

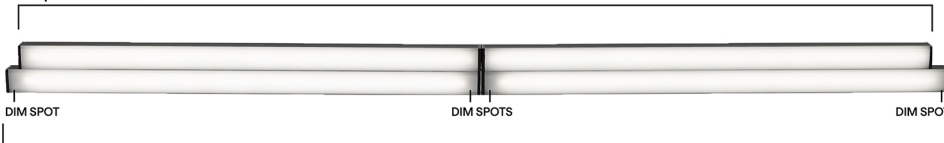

Exact Fixtures

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures


DW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
		
12"	10.63"	10.75"
13"	12.63"	12.75"
14"	12.63"	12.75"
15"	14.63"	14.75"
16"	14.63"	14.75"
17"	16.63"	16.75"
18"	16.63"	16.75"
19"	18.63"	18.75"
20"	18.63"	18.75"
21"	20.63"	20.75"
22"	20.63"	20.75"
23"	22.63"	22.75"
24"	22.63"	22.75"
36"	34.63"	34.75"
48"	46.63"	46.75"
60"	58.63"	58.75"
72"	70.63"	70.75"
84"	82.63"	82.75"
96"	94.63"	94.75"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

NJ-MEDIUM



J Mounting Bracket

SD-L-MEDIUM



L Mounting Bracket


IQ-QCAP-UNV-CUTTER



QTL recommended FC Cutter

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity



Q-CAP WURM™ FOR TUNABLE APPLICATIONS

24VDC Flexible Fixtures

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage