




**FA-24**  
120V GU10 35W Halogen/8W LED  
Flood/Accent

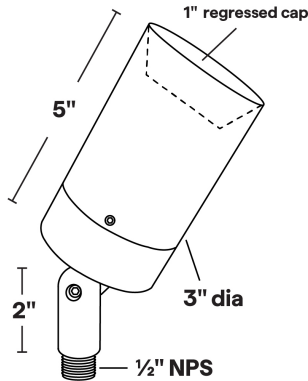

- 1" regressed lens cap; holds up to three accessories.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 120V
- Socket: GU10 Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

FA-24 Shown in Bronze Texture Powder Coat  
Finish (BZT)  
Knuckle: Tapered & Positive Locking

Dimensions: 3" dia. x 5"

1	2	3
PRODUCT	MATERIAL	FINISH
FA-24	A	

Sample Part Number: FA-24-A-BK

1	2	3
PRODUCT	MATERIAL	FINISH
FA-24	A Aluminum	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




FA-24

120V GU10 35W Halogen/8W LED Flood/Accent

1

PRODUCT - DIMENSIONS



2


MATERIAL



3

FINISH

Eight Standard TGIC Free powder coat finishes available.

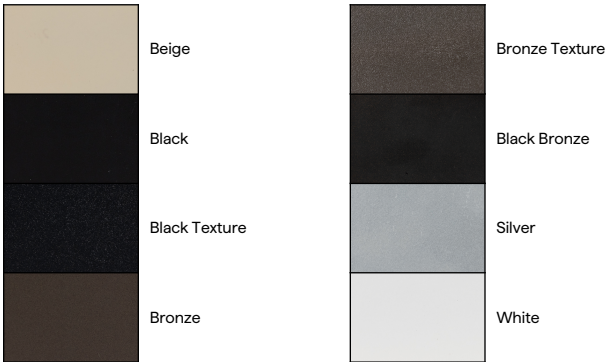

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately







**FA-24**

120V GU10 35W Halogen/8W LED Flood/Accent

**LAMPS**

MR16 Halogen or LED; GU10 Porcelain  
Maximum wattage: 35W Halogen/8W LED

GU10	GU10
	
EMERY ALLEN	EMERY ALLEN
7.0W	3.0W AMBER