




ST-7
12V MR16 20W Halogen/8W LED Box Mount
Step Light



- 6061 Marine Grade Aluminum, available in eight standard TGIC Free powder coat finishes.
- Stainless steel hardware.
- Tempered crystalline spread lens.
- Single gang junction box design.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Lens: Tempered Crystalline Spread
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

ST-7 Shown in Bronze Texture Powder Coat Finish (BZT) Dimensions: 3" x 5 " faceplate; 3 1/4" length

1	2	3
PRODUCT	MATERIAL	FINISH
ST-7	A	

Sample Part Number: **ST-7-A-BK**

1	2	3
PRODUCT	MATERIAL	FINISH
ST-7	A Aluminum	<div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div>

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




ST-7

12V MR16 20W Halogen/8W LED Box Mount Step Light

1

PRODUCT - DIMENSIONS

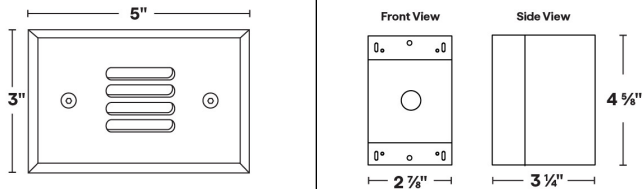

2

MATERIAL



Aluminum

3


FINISH

Eight Standard TGIC Free powder coat finishes available



LAMPS

MR16 Halogen or LED; GU5.3 Bi-Pin Porcelain
Maximum wattage: 20W Halogen/8W LED





ST-7

12V MR16 20W Halogen/8W LED Box Mount Step Light

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS