




RL-5L

12VAC/DC MR16 9W LED Pendant Light



RL-5L Shown in Bronze Texture Powder Coat Finish (BZT)

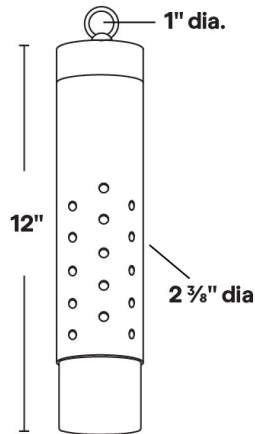

Dimensions: 2 3/8" dia. x 12"

- 1" brass loop for mounting. Hanging hook included.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 12" of 18 ga. wire leads.
- Frosted acrylic liner.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for pendant mounted downlighting applications. Can be utilized for pergola, tree-mounted, and other exterior installations.

1	2	3	4	5	6	7
PRODUCT	MATERIAL	CABLE	FINISH	WATTAGE	CCT	LENS
RL-5L	A			9.0		

Sample Part Number: RL-5L-A-0-BK-9.0-30-30

1	2	3	4	5
PRODUCT	MATERIAL	CABLE	FINISH	WATTAGE
RL-5L	A Aluminum	<div><div>0</div><div>5</div><div>10</div><div>15</div><div>20</div><div>25</div><div>30</div></div> <div><div>None</div><div>5ft</div><div>10ft</div><div>15ft</div><div>20ft</div><div>25ft</div><div>30ft</div></div>	<div><div>BG</div><div>BB</div><div>BK</div><div>BKT</div><div>BZ</div><div>BZT</div><div>SL</div><div>WH</div></div> <div><div>Beige</div><div>Black Bronze</div><div>Black</div><div>Black Texture</div><div>Bronze</div><div>Bronze Texture</div><div>Silver</div><div>White</div></div>	<div><div>9.0</div><div>9.0W</div></div>

6	7
CCT	LENS
<div><div>27</div><div>30</div><div>40</div></div> <div><div>2700K</div><div>3000K</div><div>4000K</div></div>	<div><div>15</div><div>30</div><div>45</div><div>60</div></div> <div><div>15 Degree Lens</div><div>30 Degree Lens</div><div>45 Degree Lens</div><div>60 Degree Lens</div></div>

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




RL-5L

12VAC/DC MR16 9W LED Pendant Light

1

PRODUCT - DIMENSIONS

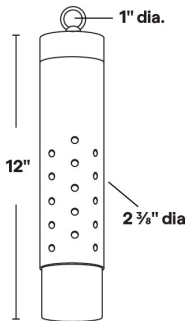

2

MATERIAL




Aluminum

4

FINISH

Eight Standard TGIC Free powder coat finish.

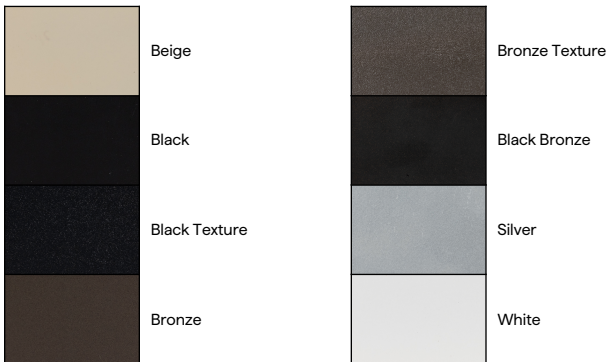

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



9W LED MODULE

MR16 LED MODULE

3 YEAR
WARRANTY



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

LED LENS



15° Lens



30° Lens



45° Lens



60° Lens