




## DL-8

12V MR11 20W Halogen/2W LED Down Light

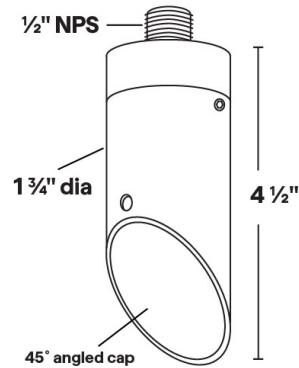

- 45° angled cap; holds up to one accessory
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10' of 18ga. Teflon coated wire leads.
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20W Halogen/2W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU4 Bi-Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for fixed downlighting applications. Can be utilized for pergola and other exterior installations.

DL-8 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 1 3/4" dia. x 4 1/2"

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-8	A			

Sample Part Number: DL-8-A-1-0-BK

1	2	3	4	5
PRODUCT	MATERIAL	MOUNTING PLATE	STEM LENGTH	FINISH
DL-8	A Aluminum	<div><div>1</div>4/0 Round Mounting Plate</div> <div><div>2</div>3/0 Round Mounting Plate</div> <div><div>3</div>Surface MT-11</div> <div><div>4</div>Surface MT-21</div>	<div><div>0</div>No Stem</div> <div><div>3</div>3" Stem Length</div> <div><div>6</div>6" Stem Length</div> <div><div>9</div>9" Stem Length</div> <div><div>12</div>12" Stem Length</div> <div><div>18</div>18" Stem Length</div>	<div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



## DL-8

12V MR11 20W Halogen/2W LED Down Light

### 1 PRODUCT - DIMENSIONS




### 2 MATERIAL



Aluminum

### 3 MOUNTING PLATE

1/2" NPS



4/0 Round  
Mounting Plate  
MT-25



3/0 Round  
Mounting Plate  
MT-27



Surface  
Mount Kit  
MT-11



Surface  
Mount Canopy  
MT-21

### 4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White











# DL-8

12V MR11 20W Halogen/2W LED Down Light







## ACCESSORIES - COLOR FILTERS

Holds up to one accessories Wire Filter Holder is included for each color filter in place.

<b>BL</b>  Blue Glass Filter To order separately use AY-2-MR11-BL	<b>LB</b>  Light Blue Glass Filter To order separately use AY-2-MR11-LB	<b>PK</b>  Pink Glass Filter To order separately use AY-2-MR11-PK	<b>AM</b>  Amber Glass Filter To order separately use AY-2-MR11-AM	<b>MV</b>  Mercury Vapor Glass Filter To order separately use AY-2-MR11-MV	<b>RD</b>  Red Glass Filter To order separately use AY-2-MR11-RD	<b>GR</b>  Green Glass Filter To order separately use AY-2-MR11-GR	<b>DA</b>  Dichroic Amber Glass Filter To order separately use AY-2-MR11-DA
--	--	--	---	---	---	---	--



## ACCESSORIES - LENS

Holds up to one accessories

<b>SP</b>  Spread Lens To order separately use AY-1-MR11-1	<b>LI</b>  Linear Lens To order separately use AY-1-MR11-2	<b>SO</b>  Softening Lens To order separately use AY-1-MR11-3	<b>LV</b>  Louver Lens To order separately use AY-1-MR11-4	<b>WI</b>  Wire Holder To order separately use AY-1-MR11-5	<b>FR</b>  Frosted Lens To order separately use AY-1-MR11-6
---	---	--	---	---	--

## LAMPS

MR11 Halogen or LED; GU4 Bi Pin Porcelain  
Maximum wattage: 20W Halogen/2W LED

<b>MR11</b>  EMERY ALLEN 1.5W	<b>MR11</b>  EMERY ALLEN 1.5W
---	---

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS