



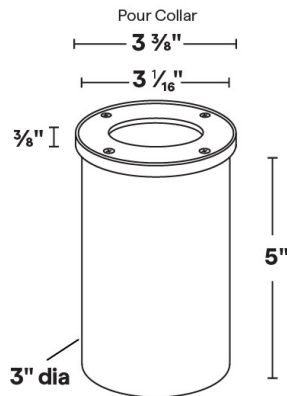

# IN-1L

## 12VAC/DC MR16 9W LED In Ground Light

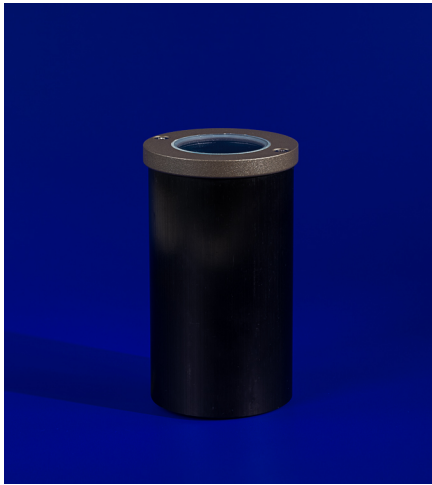

- 6061 Marine Grade Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Not compatible with electronic transformers.
- Tempered glass lens.
- 6 feet of 16/2 low voltage cable supplied.
- Input Voltage: 12VAC/DC (remote magnetic transformer required)
- Socket: GY 6.35 Bi-pin porcelain
- Wet Listed
- Specification-grade, wet-location direct burial landscape luminaire for uplighting applications.

IN-1L Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 3 1/16" dia. x 5" long

1	2	3	4	5	6	7	8
PRODUCT	MATERIAL	TOP STYLE	POUR COLLAR	FINISH	WATTAGE	CCT	LENS
IN-1L	A				9.0		

Sample Part Number: IN-1L-A-R-O-BK-9.0-27-30

<b>1</b> <b>PRODUCT</b> IN-1L	<b>2</b> <b>MATERIAL</b> A Aluminum	<b>3</b> <b>TOP STYLE</b> R Round Top S Square Top T Tapered	<b>4</b> <b>POUR COLLAR</b> O None PC Pour Collar No pour collar comes standard unless specified otherwise.	<b>5</b> <b>FINISH</b> BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White
<b>6</b> <b>WATTAGE</b> 9.0 9.0W	<b>7</b> <b>CCT</b> 27 2700K 30 3000K 40 4000K	<b>8</b> <b>LENS</b> 15 15 Degree Lens 30 30 Degree Lens 45 45 Degree Lens 60 60 Degree Lens		


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




# IN-1L

12VAC/DC MR16 9W LED In Ground Light

## 1 PRODUCT - DIMENSIONS

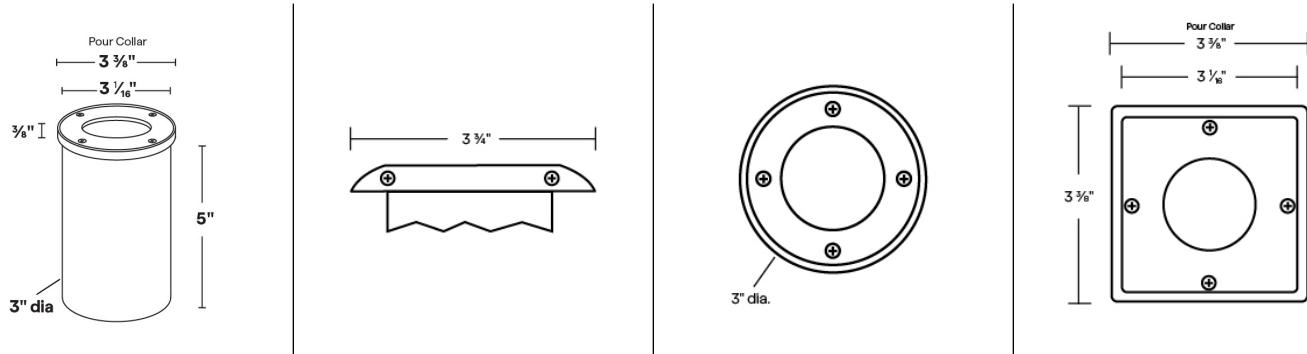


## 2 MATERIAL



## 5 FINISH

Eight Standard TGIC Free powder coat finishes

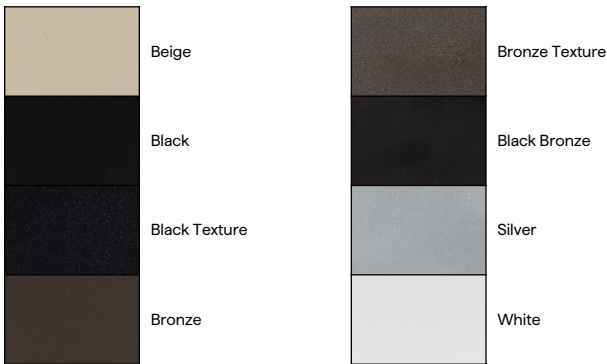

## ACCESSORIES - COLOR FILTERS

Lens cap holds 2 lens accessory. Wire Filter Holder is included for each color filter to hold filter in place.

BL	LB	PK	AM	MV	RD	GR	DA
Blue Glass Filter	Light Blue Glass Filter	Pink Glass Filter	Amber Glass Filter	Mercury Vapor Glass Filter	Red Glass Filter	Green Glass Filter	Dichroic Amber Glass Filter
To order separately use AY-2-MR16-BL	To order separately use AY-2-MR16-LB	To order separately use AY-2-MR16-PK	To order separately use AY-2-MR16-AM	To order separately use AY-2-MR16-MV	To order separately use AY-2-MR16-RD	To order separately use AY-2-MR16-GR	To order separately use AY-2-MR16-DA









IN-1L

12VAC/DC MR16 9W LED In Ground Light

ACCESSORIES - LENS

Holds up to two accessories

<div>SP</div> <div></div> <div>Spread Lens</div> <div>To order separately use AY-1-MR16-1</div>	<div>LI</div> <div></div> <div>Linear Lens</div> <div>To order separately use AY-1-MR16-2</div>	<div>SO</div> <div></div> <div>Softening Lens</div> <div>To order separately use AY-1-MR16-3</div>	<div>LV</div> <div></div> <div>Louver Lens</div> <div>To order separately use AY-1-MR16-4</div>	<div>WI</div> <div></div> <div>Wire Holder</div> <div>To order separately use AY-1-MR16-5</div>	<div>FR</div> <div></div> <div>Frosted Lens</div> <div>To order separately use AY-1-MR16-6</div>
--	--	---	--	--	---

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS



## 9W LED MODULE

MR16 LED MODULE

**3 YEAR**  
WARRANTY



9W LED Module

- Equivalent to MR16 75W Halogen (equivalent CBCP)
- 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lens: 15°, 30°, 45°, 60°
- Compatible with low-voltage magnetic transformers
- Field replaceable

### LED MODULE SPECIFICATIONS

WATTAGE	LENS	2700K	3000K	4000K
9W	15°, 30°, 45°, 60°	810 Lumens	835 Lumens	855 Lumens

### LED LENS



15° Lens



30° Lens



45° Lens



60° Lens