




**PL-6**  
12V GY6.35/G4 35W Halogen/4W LED  
Wash Light

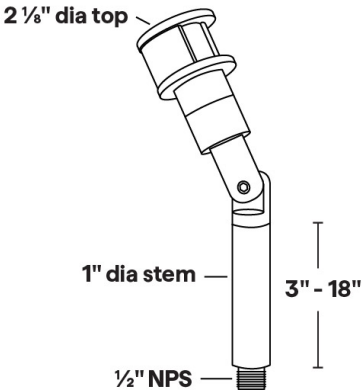

- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/4W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

PL-6 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 2 1/8" dia. top

| 1       | 2        | 3           | 4          | 5            | 6      |
|---------|----------|-------------|------------|--------------|--------|
| PRODUCT | MATERIAL | STEM LENGTH | LENS STYLE | OPENING SIZE | FINISH |
| PL-6    | A        |             |            |              |        |

Sample Part Number: PL-6-A-6-F-90-BK


| 1       | 2          | 3  | 4                    | 5  | 6  |
|---------|------------|--|----------------------|--|--|
| PRODUCT | MATERIAL   | STEM LENGTH  | LENS STYLE           | OPENING SIZE                                     | FINISH   |
| PL-6    | A Aluminum | 0 None<br>3 3"<br>6 6"<br>9 9"<br>12 12"<br>18 18" | F Frosted<br>C Clear | 90 90 Degree<br>120 120 Degree<br>180 180 Degree | BG Beige<br>BB Black Bronze<br>BK Black<br>BKT Black Texture<br>BZ Bronze<br>BZT Bronze Texture<br>SL Silver<br>WH White |



**PL-6**  
12V GY6.35/G4 35W Halogen/4W LED Wash Light

1

PRODUCT - DIMENSIONS



2




MATERIAL



5

OPENING SIZE


Three Opening Options



6

FINISH

Eight Standard TGIC Free powder coat finishes

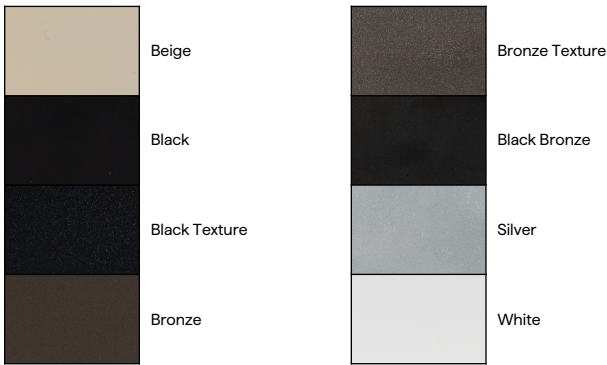




PL-6

12V GY6.35/G4 35W Halogen/4W LED Wash Light

ACCESSORIES - MOUNTING


1/2" NPS; Mount options must be order separately

MT-45




Ground Stake

MT-2




Adjustable Ground Stake

MT-6




Stainless Steel Ground Spike

MT-7



Stainless Steel Ground Spike

MT-8




Stainless Steel Ground Spike

LAMPS

G4 Halogen or LED; GY-6.35 Bi Pin Porcelain (accepts G4 Lamps)  
Maximum wattage: 35W Halogen/4W LED


G4



EMERY ALLEN

4.0W

G4



EMERY ALLEN

2.0W AMBER

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIMMING<br>PROTOCOL | OUTDOOR  |
|---------------------|--|
|                     | LANDSCAPE LIGHTING                                     |
| Phase               | Q-HEX<br>Q-SET-1<br>Q-SET-2<br>Q-SET-3<br>QOMD<br>QOMS |