



# LC-SW24/4.0

LED Strips - Static White LC Series



- One bin, three step static white LED strip with 487 lm/ft @ 3000K
- 8 diodes per 2" cut point
- Available in full reels or custom cut lengths
- Offered in CCTs of 2200K, 2400K, 2700K, 3000K, 3500K, and 4000K
- Compatible with QTL's standard extrusions
- For factory built fixture, contact factory

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
LC-SW24/4.0	DRY						

Sample Part Number: LC-SW24/4.0-DRY-30-CON6-CON6-WH-CL2-12"

1

V/WATTS

LC-SW24/4.0

Voltage: 24VDC  
Wattage: 4.0W/ft  
See following pages for compatible power supplies.

2

RATED

DRY IP20

3

CCT - LUMENS/CRI

22

2200K 330/96

24

2400K 394/96

27

2700K 403/97

30

3000K 487/95

35

3500K 474/97

40

4000K 520/95

4

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 24")

BRL

Barrel

CLS

Closed End (No feed)

CON6

Connector 6"

CON24

Connector 24"

5

CONNECTOR/WIRE OUT

BW

Bare Wire (Standard 24")

BRL

Barrel

CLS

Closed End (No feed)

CON6

Connector 6"

CON24

Connector 24"

6

WIRE COLOR

WH

White

BK

Black

N/A

Specify for Barrel

Barrel is white

7

WIRE TYPE

CL2

Class 2

CL2P

Class 2 Plenum Rated

N/A

Specify for Barrel

CL2P only available with bare wire leads (BW)

8

ILLUMINATED LENGTH

2"-288"

2" increments

For Class 2 low voltage, maximum reel size 48' run length per 96W output. Reel sizes 100' Reels do not include leads.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed



# LC-SW24/4.0

LED Strips - Static White LC Series


### 3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with LC-SW24/4.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	330	80 Lm/W	96	72	94	100
2400K	394	94 Lm/W	96	75	94	100
2700K	403	93 Lm/W	97	79	94	101
3000K	487	115 Lm/W	95	76	93	100
3500K	474	116 Lm/W	97	86	93	100
4000K	520	121 Lm/W	95	79	91	99

### 4 / 5 CONNECTOR/WIRE – IN/OUT


**BW**



.10"

Bare Wire 24"  
Stranded 22 AWG


**BRL**



1.44"  
.42"  
1.74"  
.35"

Barrel 6" - DRY/DMP |  
22 AWG


**CON6/CON24**



1.63"  
.38"  
1.34"  
.39"

6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

**CLS**



Not soldered

### 6 WIRE COLOR




White



Black

### 8 ILLUMINATED LENGTH - DIMENSIONS

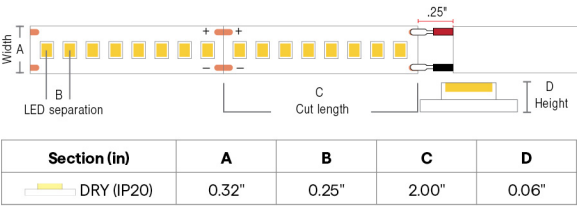

### COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET																



## LC-SW24/4.0

LED Strips - Static White LC Series

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	LC-SW24/1.0-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle


















DIMMING PROTOCOL	INDOOR
	LC-SW24/1.0-4.0
Non-Dim	QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle



# LC-SW24/4.0

## LED Strips - Static White LC Series

### COMPATIBLE WIRING ACCESSORIES

<b>SNP-LEAD</b>  Connects lead wire to LED strip DRY ONLY	<b>SNP-INLINE</b>  Connects LED strip to LED strip DRY ONLY	<b>CLP-LEAD</b>  Connects lead wire to LED strip DRY ONLY	<b>CLP-INLINE</b>  Connects LED strip to LED strip DRY ONLY	<b>Q-NECT-01-LEAD-24</b>  Connects LED board to 24" lead wire DRY ONLY	<b>Q-NECT-01-JUMP-3</b>  Connects two LED boards together with 3" jumper, DRY ONLY	<b>Q-NECT-01-INLINE</b>  Connects two LED boards together DRY ONLY	<b>Q-NECT-SCREW-LEAD-12</b>  Connects LED board to 12" lead wire DRY ONLY	<b>Q-NECT-SCREW-JUMP-12</b>  Connects two LED boards together with 12" jumper, DRY ONLY	<b>Q-mini-J</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
<b>INSTALLATION KITS</b>  LEAD or JUMP DRY and WET LED strip wiring kits	<b>BARREL-EXT</b>  8ft barrel cable extender DRY ONLY	<b>BARREL FOUR-FER</b>  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP	<b>Q-mini-J5</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)			