



LC-SW24/6.0

LED Strips - Static White LC Series



- One bin, three step static white LED strip with 681 lm/ft @ 3000K
- 8 diodes per 2" cut point
- Available in full reels or custom cut lengths
- Offered in CCTs of 2200K, 2400K, 2700K, 3000K, 3500K, and 4000K
- Compatible with QTL's standard extrusions
- For factory built fixture, contact factory

1	2	3	4	5	6	7	8
V/WATTS	RATED	CCT - LUMENS/CRI	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
LC-SW24/6.0	DRY						

Sample Part Number: LC-SW24/6.0-DRY-30-CON6-CON6-WH-CL2-12"

1

V/WATTS

LC-SW24/6.0

Voltage: 24VDC
Wattage: 6.0W/ft
See following
pages for
compatible power
supplies.

2

RATED

DRY IP20

3

CCT - LUMENS/CRI

222200K 553/95

242400K 563/95

272700K 688/96

303000K 681/95

353500K 728/97

404000K 755/95

4

CONNECTOR/WIRE IN

BWBare Wire (Standard 24")

BRLBarrel

CLSClosed End (No feed)

CON6Connector 6"

CON24Connector 24"

5

CONNECTOR/WIRE OUT

BWBare Wire (Standard 24")

BRLBarrel

CLSClosed End (No feed)

CON6Connector 6"

CON24Connector 24"

6

WIRE COLOR

WHWhite

BKBlack

N/ASpecify for Barrel

Barrel is white

7

WIRE TYPE

CL2Class 2

CL2PClass 2 Plenum Rated

N/ASpecify for Barrel

CL2P only available with bare wire leads (BW)

8

ILLUMINATED LENGTH

2"-192"2" increments

For Class 2 low voltage, maximum reel size 48' run length per 96W output. Reel sizes 100' Reels do not include leads.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed



LC-SW24/6.0

LED Strips - Static White LC Series


3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with LC-SW24/6.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	553	83 Lm/W	95	66	94	99
2400K	563	87 Lm/W	95	69	94	100
2700K	688	96 Lm/W	96	76	94	101
3000K	681	98 Lm/W	95	74	93	100
3500K	728	103 Lm/W	97	84	93	100
4000K	755	105 Lm/W	95	77	91	99

4 / 5 CONNECTOR/WIRE – IN/OUT


BW



.10"

Bare Wire 24"
Stranded 22 AWG


BRL



1.44"
.42"
1.74"
.35"

Barrel 6" - DRY/DMP |
22 AWG


CON6/CON24



1.63"
.38"
1.34"
.39"


6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

CLS




Not soldered

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

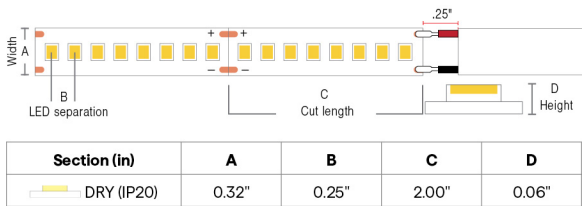

COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET																



LC-SW24/6.0

LED Strips - Static White LC Series

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	LC-SW24/6.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle

















DIMMING PROTOCOL	INDOOR
	LC-SW24/6.0
Non-Dim	QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle



LC-SW24/6.0

LED Strips - Static White LC Series

COMPATIBLE WIRING ACCESSORIES

SNP-LEAD  <p>Connects lead wire to LED strip DRY ONLY</p>	SNP-INLINE  <p>Connects LED strip to LED strip DRY ONLY</p>	CLP-LEAD  <p>Connects lead wire to LED strip DRY ONLY</p>	CLP-INLINE  <p>Connects LED strip to LED strip DRY ONLY</p>	Q-NECT-01-LEAD-24  <p>Connects LED board to 24" lead wire DRY ONLY</p>	Q-NECT-01-INLINE  <p>Connects two LED boards together DRY ONLY</p>	Q-NECT-SCREW-LEAD-12  <p>Connects LED board to 12" lead wire DRY ONLY</p>	Q-NECT-SCREW-JUMP-12  <p>Connects two LED boards together with 12" jumper; DRY ONLY</p>	Q-mini-J  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	Q-mini-J5  <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>
INSTALLATION KITS  <p>LEAD or JUMP DRY and WET LED strip wiring Kits</p>	BARREL-EXT  <p>8ft barrel cable extender DRY ONLY</p>	BARREL FOUR-FER  <p>Splits lead from one to four LED Barrel connector fixtures, DRY/DMP</p>	CON120-EXT  <p>10ft Con cable extender DRY/DMP/WET</p>	CON FOUR-FER  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>	CON M - BARREL F  <p>Male con to barrel cable adaptor DRY/DMP</p>				