




# M5-SW24/1.0

## LED Strips - Static White



- One bin, one step static white LED strip with 172 lm/ft @ 3000K provides even, consistent color
- 6 diodes per 1" cut point
- CCTs 2200K and greater meet or exceed Title 24 and JA8
- Ambient operating temp: -4-150°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 70000 hrs

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
M5-SW24/1.0							

Sample Part Number: **M5-SW24/1.0-DRY-30-BW-BW-WH-CL2-48"**

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT
<b>M5-SW24/1.0</b> Voltage: 24VDC Wattage: 1.0W/ft See following pages for compatible power supplies.	<b>DRY</b> IP20	<b>20</b> 2000K 144/94 <b>27</b> 2700K 163/97 <b>30</b> 3000K 172/98 <b>35</b> 3500K 179/98 <b>40</b> 4000K 178/97	<b>BW</b> Bare Wire (Standard 24") <b>CLS</b> Closed End (No feed)  Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>CLS</b> Closed End (No feed)  Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
	<b>DMP</b> IP54	<b>24</b> 2400K 127/95 <b>27</b> 2700K 130/96 <b>30</b> 3000K 138/98 <b>35</b> 3500K 145/95 <b>40</b> 4000K 154/95	<b>BW</b> Bare Wire (Standard 24")  Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>CLS</b> Closed End (No feed)  Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
<b>WH</b> White <b>BK</b> Black  Barrel is white	<b>CL2</b> Class 2 <b>CL2P</b> Class 2 Plenum Rated <b>N/A</b> Specify for Barrel  CL2P only available with bare wire leads (BW)	<b>1"-768"</b> 1" increments
<b>WH</b> White <b>BK</b> Black  Barrel is black	<b>CL2</b> Class 2 <b>CL2P</b> Class 2 Plenum Rated <b>N/A</b> Specify for Barrel  CL2P only available with bare wire leads (BW)	<b>1"-180"</b> 1" increments

### SEE APPLICABLE MICRO5 EXTRUSION SPEC SHEET FOR ORDERING.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Title 24 - JA8-2016 Strips: DRY and DMP rated, 2200K and above



# M5-SW24/1.0

LED Strips - Static White

## 3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with SW24/1.5-DRY


CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
1800K	***	** Lm/W	**	**	**	***
2000K	144	85 Lm/W	94	64	89	104
2200K	149	89 Lm/W	96	93	95	103
2400K	154	92 Lm/W	97	94	95	102
2700K	163	97 Lm/W	97	98	95	102
3000K	172	102 Lm/W	98	98	94	101
3500K	179	107 Lm/W	98	98	92	101
4000K	178	103 Lm/W	97	92	92	100

## TEMPERATURE RATINGS

		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	150°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F

## 4 / 5 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

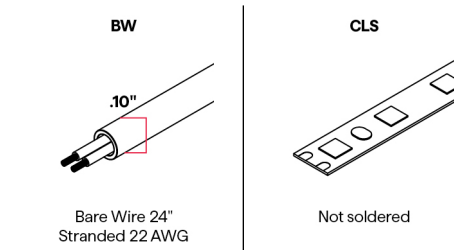

## 6 WIRE COLOR



## 8 ILLUMINATED LENGTH - DIMENSIONS

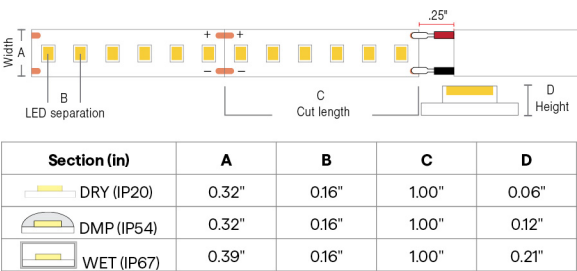

## COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRES	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
WET	✓		EXCLUDES 40° LENS	✓	✓	✓	✓	✓	EXCLUDES 45° LENS	✓	EXCLUDES 30°, 45°, 60° LENS	✓	✓	✓		NO LENS



M5-SW24/1.0

LED Strips - Static White

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED

















# M5-SW24/1.0

LED Strips - Static White

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-SW	MICRO 5-SW
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES


<b>QUOVA-MICRO</b>  QUOVA Knife Edge	<b>SHIELD A - Small</b>  For standalone use	<b>SHIELD B - Small</b>  For use within extrusions	<b>BL-GRAZER</b>  Backwards L Mounting Bracket	<b>BL-MICRO</b>  Backwards L Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>SD-L-MEDIUM</b>  L Mounting Bracket	<b>SD-L-MICRO</b>  L Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket
<b>iQ-STRAP</b>  Plastic strap, Fits all LED strips	<b>iQ-CLIP-SS12</b>  Metal clip, Fits DMP strip	<b>iQ-CLIP-SS10</b>  Metal clip, Fits WET strip	<b>iQ-CLIP-PL</b>  Plastic clip, Fits WET strip						



# M5-SW24/1.0

LED Strips - Static White

## COMPATIBLE WIRING ACCESSORIES

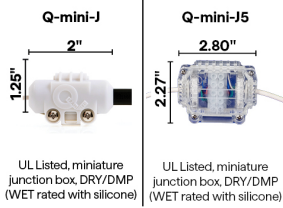

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



## COMPATIBLE APPS

### NFC APP



Read and write DMX addresses and adjust voltage