




SW-HE24/6.0

LED Strips - Static White High Efficacy



- High-efficacy, one bin, one step static white LED tape provides consistent color project to project with exceptional photometric qualities
- 8 diodes per 2" cut point
- Dry and wet-rated
- Field-cutable up to 192"
- Ambient operating temp: -4-115°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 66000 hrs

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SW-HE24/6.0							

Sample Part Number: **SW-HE24/6.0-DMP-24-BW-CLS-WH-CL2-48"**

<div>1</div> <div>V/WATTS</div> <div>SW-HE24/6.0</div> <div>Voltage: 24VDC Wattage: 6.0W/ft See following pages for compatible power supplies.</div>	<div>2</div> <div>RATED</div> <div>DRY IP20</div> <div>DMP IP54</div> <div>WET IP67</div>	<div>3</div> <div>CCT - LUMENS/CRI</div> <div><div>181800K **/**</div><div>202000K 693/93</div><div>222200K 685/96</div><div>242400K 703/96</div><div>272700K 710/97</div><div>303000K 771/98</div><div>353500K 794/98</div><div>404000K 779/97</div></div> <div><div>222200K **/**</div><div>242400K 619/93</div><div>272700K 617/94</div><div>303000K 596/97</div><div>353500K 653/98</div><div>404000K 665/97</div></div> <div><div>181800K **/**</div><div>202000K 609/93</div><div>222200K 594/96</div><div>242400K 620/96</div><div>272700K 627/97</div><div>303000K 656/98</div><div>353500K 697/98</div><div>404000K 674/97</div></div>	<div>4</div> <div>CONNECTOR/WIRE IN</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>5</div> <div>CONNECTOR/WIRE OUT</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>
<div>6</div> <div>WIRE COLOR</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is white</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is black</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is black</div>	<div>7</div> <div>WIRE TYPE</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div>	<div>8</div> <div>ILLUMINATED LENGTH</div> <div><div>2"-192"2" increments</div><div>Available in reel lengths of 16' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.</div></div> <div><div>2"-180"2" increments</div></div> <div><div>2"-192"2" increments</div></div>		

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Consult factory for alternate Kelvin temperature | Title 24 - JA8-2019 Strips: DRY and WET rated, 2000K and above



SW-HE24/6.0

LED Strips - Static White High Efficacy

3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 66000 hrs]
Tested with SW-HE24/6.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
1800K	***	** Lm/W	**	**	**	***
2000K	693	111 Lm/W	93	59	91	101
2200K	685	114 Lm/W	96	88	92	97
2400K	703	117 Lm/W	96	93	92	99
2700K	710	118 Lm/W	97	94	94	100
3000K	771	128 Lm/W	98	95	93	99
3500K	794	132 Lm/W	98	94	92	99
4000K	779	130 Lm/W	97	98	91	98

TEMPERATURE RATINGS

		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F

4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

BW

Bare Wire 24" Stranded 22 AWG

BRL

Barrel 6" - DRY/DMP | 22 AWG

BRL

Barrel 6" - WET | 22 AWG

CON6/CON24

6" or 24" Overall Wire Connector | 22 AWG
IP67 Rated, UL Listed


CLS

Not soldered

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

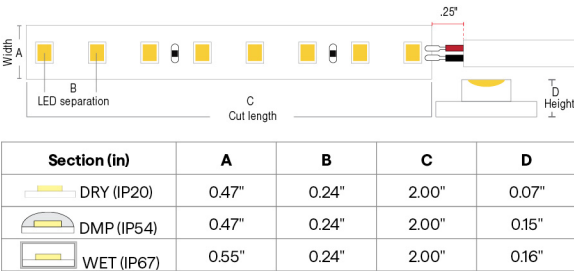

COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
WET	✓													✓		



SW-HE24/6.0

LED Strips - Static White High Efficacy

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	



SW-HE24/6.0

LED Strips - Static White High Efficacy

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES










<div>QUOVA-MICRO</div> <div></div> <div>QUOVA Knife Edge</div>	<div>SHIELD A - Large</div> <div></div> <div>For standalone use</div>	<div>SHIELD B - Large</div> <div></div> <div>For use within extrusions</div>	<div>BL-GRAZER</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-MICRO</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-LARGE</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>SD-L-LARGE</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MEDIUM</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MICRO</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-J-LARGE</div> <div></div> <div>J Mounting Bracket</div>
<div>iQ-STRAP</div> <div></div> <div>Plastic strap, Fits all LED strips</div>	<div>iQ-CLIP-SS12</div> <div></div> <div>Metal clip, Fits DMP strip</div>	<div>iQ-CLIP-SS10</div> <div></div> <div>Metal clip, Fits WET strip</div>	<div>iQ-CLIP-PL</div> <div></div> <div>Plastic clip, Fits WET strip</div>						



SW-HE24/6.0

LED Strips - Static White High Efficacy

COMPATIBLE WIRING ACCESSORIES

 <p>Q-mini-J</p> <p>2"</p> <p>1.25"</p> <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	 <p>Q-mini-J5</p> <p>2.80"</p> <p>2.27"</p> <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	 <p>BARREL-EXT</p> <p>8ft barrel cable extender</p> <p>DRY ONLY</p>	 <p>BARREL FOUR-FER</p> <p>Splits lead from one to four LED Barrel connector fixtures, DRY/DMP</p>	 <p>CON120-EXT</p> <p>10ft Con cable extender</p> <p>DRY/DMP/WET</p>	 <p>CON FOUR-FER</p> <p>Splits lead from one to four LED Con connectors</p> <p>DRY/DMP/WET</p>	 <p>Q-NECT-03-LEAD-24</p> <p>.61"</p> <p>.38"</p> <p>Connects LED board to 24" lead wire</p> <p>DRY ONLY</p>	 <p>Q-NECT-03-JUMP-3</p> <p>3"</p> <p>Connects two LED boards together with 3" jumper, DRY ONLY</p>	 <p>Q-NECT-03-INLINE</p> <p>.61"</p> <p>.38"</p> <p>Connects two LED boards together</p> <p>DRY ONLY</p>
--	--	--	---	---	---	--	--	---

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

