



# SW-SCOB24/4.0

## LED Strips - Static White SCOB



Declare.



- Static white SCOB strip with 391 lm/ft @ 3000K
- 1" cut point
- Ambient operating temp: -4-130°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 50000 hrs

1	2	3	4	5	6	7	8
V/WATTS	RATED	CCT - LUMENS/CRI	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
SW-SCOB24/4.0	DRY						

Sample Part Number: **SW-SCOB24/4.0-DRY-24-CON6-CLS-WH-CL2-48"**

<div>1</div> <div>V/WATTS</div> <div>SW-SCOB24/4.0</div> <div>Voltage: 24VDC Wattage: 4.0W/ft See following pages for compatible power supplies.</div>	<div>2</div> <div>RATED</div> <div>DRY IP20</div>	<div>3</div> <div>CCT - LUMENS/CRI</div> <div><div>222200K 371/93</div><div>242400K 380/92</div><div>272700K 384/94</div><div>303000K 391/95</div><div>353500K 408/96</div><div>404000K 413/95</div></div>	<div>4</div> <div>CONNECTOR/WIRE IN</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>5</div> <div>CONNECTOR/WIRE OUT</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>
<div>6</div> <div>WIRE COLOR</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is white</div>	<div>7</div> <div>WIRE TYPE</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div>	<div>8</div> <div>ILLUMINATED LENGTH</div> <div><div>1"-288"</div><div>1" increments</div></div>		

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed



# SW-SCOB24/4.0

LED Strips - Static White SCOB

## 3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 50000 hrs]  
Tested with SW-SCOB24/4.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2200K	371	91 Lm/W	93	57	91	99
2400K	380	89 Lm/W	92	83	91	101
2700K	384	90 Lm/W	94	78	92	100
3000K	391	93 Lm/W	95	89	92	101
3500K	408	97 Lm/W	96	94	92	101
4000K	413	98 Lm/W	95	91	92	102

## TEMPERATURE RATINGS

		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	130°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F

## 4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

**BW**

Bare Wire 24" Stranded 22 AWG

**BRL**

Barrel 6" - DRY/DMP | 22 AWG

**BRL**

Barrel 6" - WET | 22 AWG

**CON6/CON24**

6" or 24" Overall Wire Connector | 22 AWG  
IP67 Rated, UL Listed


**CLS**

Not soldered

## 6 WIRE COLOR



## 8 ILLUMINATED LENGTH - DIMENSIONS

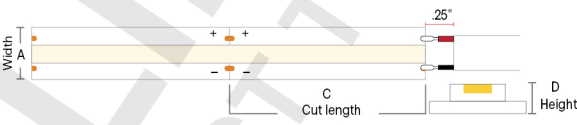

Section (in)	A	C	D
DRY (IP20)	0.32"	1.00"	0.12"

## COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY																✓
DMP																
WET																



SW-SCOB24/4.0

LED Strips - Static White SCOB

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	




# SW-SCOB24/4.0

LED Strips - Static White SCOB

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE WIRING ACCESSORIES

<b>BARREL-EXT</b>  8ft barrel cable extender DRY ONLY	<b>BARREL FOUR-FER</b>  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP	<b>Q-mini-J</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
---	--	--	--	---	--	--

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE





## SW-SCOB24/4.0

LED Strips - Static White SCOB

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage

PRELIMINARY  
SUBJECT TO CHANGE