



SW24/4.0

LED Strips - Static White



- One bin, one step static white LED strip with 373 lm/ft @ 3000K
- 6 diodes per 1" cut point
- CCTs 2200K and greater meet or exceed Title 24 and JA8
- Ambient operating temp: -4-130°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 70000 hrs

1 V/WATTS	2 RATED	3 CCT - LUMENS/CRI	4 CONNECTOR/WIRE IN	5 CONNECTOR/WIRE OUT	6 WIRE COLOR	7 WIRE TYPE	8 ILLUMINATED LENGTH
SW24/4.0							

Sample Part Number: **SW24/4.0-DRY-40-BRL-CLS-WH-CL2-48"**

<div>1</div> <div>V/WATTS</div> <div>SW24/4.0</div> <div>Voltage: 24VDC Wattage: 4.0W/ft See following pages for compatible power supplies.</div>	<div>2</div> <div>RATED</div> <div>DRY IP20</div> <div>DMP IP54</div> <div>WET IP67</div>	<div>3</div> <div>CCT - LUMENS/CRI</div> <div><div>181800K **/**</div><div>202000K 309/93</div><div>222200K 314/96</div><div>242400K 306/95</div><div>272700K 349/98</div><div>303000K 373/98</div><div>353500K 389/98</div><div>404000K 369/96</div></div> <div><div>222200K **/**</div><div>242400K 284/94</div><div>272700K 276/97</div><div>303000K 290/98</div><div>353500K 318/97</div><div>404000K 324/95</div></div> <div><div>181800K **/**</div><div>202000K 260/94</div><div>222200K 283/96</div><div>242400K 282/96</div><div>272700K 285/95</div><div>303000K 299/96</div><div>353500K 323/96</div><div>404000K 337/96</div></div>	<div>4</div> <div>CONNECTOR/WIRE IN</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>5</div> <div>CONNECTOR/WIRE OUT</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div><div>BWBare Wire (Standard 24")</div><div>BRLBarrel</div><div>CLSClosed End (No feed)</div><div>CON6Connector 6"</div><div>CON24Connector 24"</div></div> <div>Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>
<div>6</div> <div>WIRE COLOR</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is white</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is black</div> <div><div>WHWhite</div><div>BKBlack</div><div>N/ASpecify for Barrel</div></div> <div>Barrel is black</div>	<div>7</div> <div>WIRE TYPE</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div> <div><div>CL2Class 2</div><div>CL2PClass 2 Plenum Rated</div><div>N/ASpecify for Barrel</div></div> <div>CL2P only available with bare wire leads (BW)</div>	<div>8</div> <div>ILLUMINATED LENGTH</div> <div><div>1"-288"1" increments</div><div>Available in reel lengths of 24' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.</div></div> <div><div>1"-180"1" increments</div></div> <div><div>1"-288"1" increments</div></div>		

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Title 24 - JA8-2016 Strips: DRY, DMP, and WET rated, 2200K and above



SW24/4.0

LED Strips - Static White

3 CCT – LUMENS/CRI - DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with SW24/4.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
1800K	***	** Lm/W	**	**	**	***
2000K	309	81 Lm/W	93	60	89	103
2200K	314	82 Lm/W	96	90	94	101
2400K	306	80 Lm/W	95	97	94	103
2700K	349	91 Lm/W	98	93	94	101
3000K	373	97 Lm/W	98	95	94	101
3500K	389	101 Lm/W	98	96	92	100
4000K	369	96 Lm/W	96	90	90	101

TEMPERATURE RATINGS

		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	130°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F

4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

BW

.10"

Bare Wire 24" Stranded 22 AWG

BRL

1.44" .42" 1.74" .35"

Barrel 6" - DRY/DMP | 22 AWG

BRL

1.36" .44" 1.62" .66"

Barrel 6" - WET | 22 AWG

CON6/CON24

1.63" .38" 1.34" .39"

6" or 24" Overall Wire Connector | 22 AWG IP67 Rated, UL Listed


CLS

Not soldered

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

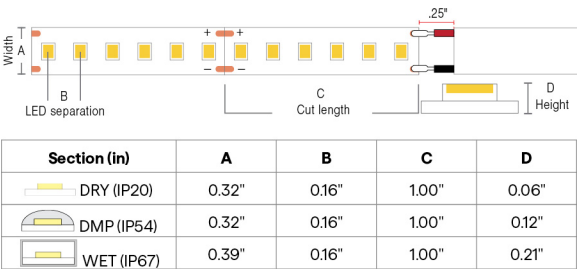

COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRES	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
WET	✓		EXCLUDES 40° LENS	✓	✓	✓	✓	✓	EXCLUDES 45° LENS	✓	EXCLUDES 30°, 45°, 60° LENS	✓	✓	✓		NO LENS



SW24/4.0

LED Strips - Static White

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/1.5-4.0	SW24/1.5-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED

















SW24/4.0

LED Strips - Static White

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/1.5-4.0	SW24/1.5-4.0
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

<div>QUOVA-MICRO</div>  <div>QUOVA Knife Edge</div>	<div>SHIELD A - Small</div>  <div>For standalone use</div>	<div>SHIELD B - Small</div>  <div>For use within extrusions</div>	<div>BL-GRAZER</div>  <div>Backwards L Mounting Bracket</div>	<div>BL-MICRO</div>  <div>Backwards L Mounting Bracket</div>	<div>BL-LARGE</div>  <div>Backwards L Mounting Bracket</div>	<div>SD-L-LARGE</div>  <div>L Mounting Bracket</div>	<div>SD-L-MEDIUM</div>  <div>L Mounting Bracket</div>	<div>SD-L-MICRO</div>  <div>L Mounting Bracket</div>	<div>SD-J-LARGE</div>  <div>J Mounting Bracket</div>
<div>iQ-STRAP</div>  <div>Plastic strap, Fits all LED strips</div>	<div>iQ-CLIP-SS12</div>  <div>Metal clip, Fits DMP strip</div>	<div>iQ-CLIP-SS10</div>  <div>Metal clip, Fits WET strip</div>	<div>iQ-CLIP-PL</div>  <div>Plastic clip, Fits WET strip</div>						



SW24/4.0

LED Strips - Static White

COMPATIBLE WIRING ACCESSORIES

SNP-LEAD Connects lead wire to LED strip DRY ONLY	SNP-INLINE Connects LED strip to LED strip DRY ONLY	CLP-LEAD Connects lead wire to LED strip DRY ONLY	CLP-INLINE Connects LED strip to LED strip DRY ONLY	Q-NECT-01-LEAD-24 Connects LED board to 24" lead wire DRY ONLY	Q-NECT-01-JUMP-3 Connects two LED boards together with 3" jumper; DRY ONLY	Q-NECT-01-INLINE Connects two LED boards together DRY ONLY	Q-NECT-SCREW-LEAD-12 Connects LED board to 12" lead wire DRY ONLY	Q-NECT-SCREW-JUMP-12 Connects two LED boards together with 12" jumper; DRY ONLY	BARREL-EXT 8ft barrel cable extender DRY ONLY
BARREL FOUR-FER Splits lead from one to four LED Barrel connector fixtures; DRY/DMP	CON120-EXT 10ft Con cable extender DRY/DMP/WET	CON FOUR-FER Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F Male con to barrel cable adaptor DRY/DMP	Q-mini-J UL Listed, miniature junction box; DRY/DMP (WET rated with silicone)	Q-mini-J5 UL Listed, miniature junction box; DRY/DMP (WET rated with silicone)	INSTALLATION KITS LEAD or JUMP DRY and WET LED strip wiring kits			

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE

1.36"
2.58"

Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP

Read and write DMX addresses and adjust voltage