




SD-SW24/4.0

LED Strips - Static White Standard Series



- Part of our Standard collection
- Offered in dry or wet
- Available in full reels or custom cut lengths
- For factory built fixture, contact factory

1	2	3	4	5	6	7	8
V/WATTS	RATED	CCT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
SD-SW24/4.0							

Sample Part Number: SD-SW24/4.0-DRY-30-CON6-CON6-WH-CL2-48"

1 V/WATTS SD-SW24/4.0 Voltage: 24VDC Wattage: 4.0W/ft See following pages for compatible power supplies.	2 RATED DRY IP20 WET IP67	3 CCT 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	4 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	5 CONNECTOR/WIRE OUT BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24" Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	6 WIRE COLOR WH White BK Black N/A Specify for Barrel Barrel is white	7 WIRE TYPE CL2 Class 2 CL2P Class 2 Plenum Rated N/A Specify for Barrel CL2P only available with bare wire leads (BW)	8 ILLUMINATED LENGTH DRY: 2"-288" in 2" increment WET: 2"-288" in 2" increment Dry version also available in reel lengths of 24' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels. Sold in reels of 25', 100', or 500'. For Class 2 low voltage, maximum 24' run length per 96W output. Reels do not include leads.
--	--	--	---	--	---	--	--

COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRES	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP																
WET	✓		✓ EXCLUDES 40° LENS	✓	✓	✓	✓	✓	✓ EXCLUDES 45° LENS	✓	✓ EXCLUDES 30°, 45°, 60° LENS	✓	✓	✓		✓ NO LENS

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Title 24 - JA8-2016 Strips: DRY and WET rated, 2700K and above



SD-SW24/4.0

LED Strips - Static White Standard Series

3 CCT – LUMENS/CRI - DELIVERED LUMENS

DRY

[Calculated L70 = 58000 hrs]
Tested with SD-SW24/4.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2400K	358	88 Lm/W	98	90	95	103
2700K	361	88 Lm/W	98	99	96	103
3000K	379	93 Lm/W	98	95	96	101
3500K	387	95 Lm/W	96	84	91	100
4000K	438	107 Lm/W	98	98	93	101

WET

[Calculated L70 = 58000 hrs]
Tested with SD-SW24/4.0-WET

CCT	Lumen/ft	CRI Ra
2400K	**	**
2700K	**	**
3000K	**	**
4000K	**	**

4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

BW

Bare Wire 24" Stranded 22 AWG

BRL

Barrel 6" - DRY/DMP | 22 AWG

BRL

Barrel 6" - WET | 22 AWG

CON6/CON24

6" or 24" Overall Wire Connector | 22 AWG
IP67 Rated, UL Listed


CLS

Not soldered

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

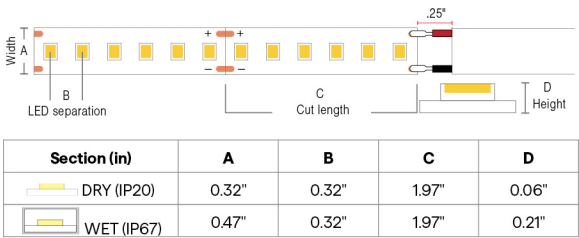



SD-SW24/4.0

LED Strips - Static White Standard Series

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SD-SW24/1.0-4.0	SD-SW24/1.0-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED



SD-SW24/4.0

LED Strips - Static White Standard Series

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SD-SW24/1.0-4.0	SD-SW24/1.0-4.0
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES


















<div>QUOVA-MICRO</div> <div></div> <div>QUOVA Knife Edge</div>	<div>SHIELD A - Small</div> <div></div> <div>For standalone use</div>	<div>SHIELD B - Small</div> <div></div> <div>For use within extrusions</div>	<div>BL-GRAZER</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-MICRO</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-LARGE</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>SD-L-LARGE</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MEDIUM</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MICRO</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-J-LARGE</div> <div></div> <div>J Mounting Bracket</div>
<div>IQ-STRAP</div> <div></div> <div>Plastic strap, Fits all LED strips</div>	<div>IQ-CLIP-SS10</div> <div></div> <div>Metal clip, Fits WET strip</div>	<div>IQ-CLIP-PL</div> <div></div> <div>Plastic clip, Fits WET strip</div>							



SD-SW24/4.0

LED Strips - Static White Standard Series

COMPATIBLE WIRING ACCESSORIES

SNP-LEAD  Connects lead wire to LED strip DRY ONLY	SNP-INLINE  Connects LED strip to LED strip DRY ONLY	CLP-LEAD  Connects lead wire to LED strip DRY ONLY	CLP-INLINE  Connects LED strip to LED strip DRY ONLY	Q-NECT-01-LEAD-24  Connects LED board to 24" lead wire DRY ONLY	Q-NECT-01-JUMP-3  Connects two LED boards together with 3" jumper, DRY ONLY	Q-NECT-01-INLINE  Connects two LED boards together DRY ONLY	Q-NECT-SCREW-LEAD-12  Connects LED board to 12" lead wire DRY ONLY	Q-NECT-SCREW-JUMP-12  Connects two LED boards together with 12" jumper, DRY ONLY	Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	INSTALLATION KITS  LEAD or JUMP DRY and WET LED strip wiring kits	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET	CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL F  Male con to barrel cable adaptor DRY/DMP			

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage