



# SW24/5.0

## LED Strips - Static White



- One bin, one step static white LED strip with 454 lm/ft @ 3000K
- 6 diodes per 1" cut point
- CCTs 2200K and greater meet or exceed Title 24 and JA8
- Ambient operating temp: -4-120°F
- Installation temp: 50-100°F | Storage temp: -4-140°F
- Calculated L70 = 70000 hrs

1	2	3	4	5	6	7	8
V/WATTS	RATED	CCT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
SW24/5.0							

Sample Part Number: **SW24/5.0-DMP-24-CON6-CLS-WH-CL2-48"**

1	2	3	4	5
V/WATTS	RATED	CCT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT
SW24/5.0  Voltage: 24VDC Wattage: 5.0W/ft See following pages for compatible power supplies.	DRY IP20 DMP IP54 WET IP67	18 1800K 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K	BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24"  Connector/Wire In not needed to specify product. Typical selection is BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW Bare Wire (Standard 24") BRL Barrel CLS Closed End (No feed) CON6 Connector 6" CON24 Connector 24"  Connector/Wire Out not needed to specify product. Typical selection is CLS or BW. BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
6	7		8	
WIRE COLOR	WIRE TYPE		ILLUMINATED LENGTH	
WH White BK Black N/A Specify for Barrel  Barrel is white	CL2 Class 2 CL2P Class 2 Plenum Rated N/A Specify for Barrel  CL2P only available with bare wire leads (BW)		DRY: 1"-288" in 1" increment DMP: 1"-180" in 1" increment WET: 1"-288" in 1" increment  Dry version also available in reel lengths of 19.2' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.  Available in reel lengths of 19.2' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.	

## COMPATIBLE EXTRUSIONS

	WIDE	ROUND	TORQ	TRES	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DMP	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
WET	✓		✓ EXCLUDES 40° LENS	✓	✓	✓	✓	✓	✓ EXCLUDES 45° LENS	✓	✓ EXCLUDES 30°, 45°, 60° LENS	✓	✓	✓		✓ NO LENS

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed | Title 24 - JA8-2016 Strips: DRY, DMP, and WET rated, 2200K and above



# SW24/5.0

LED Strips - Static White

## 3 CCT – LUMENS/CRI - DELIVERED LUMENS

### DRY

[Calculated L70 = 70000 hrs]  
Tested with SW24/5.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2000K	377	79 Lm/W	93	59	89	103
2200K	380	79 Lm/W	96	89	94	100
2400K	405	84 Lm/W	97	92	94	102
2700K	423	88 Lm/W	97	94	94	102
3000K	454	95 Lm/W	98	95	94	101
3500K	468	97 Lm/W	98	94	92	100
4000K	442	92 Lm/W	97	93	90	100

### DMP

[Calculated L70 = 70000 hrs]  
Tested with SW24/5.0-DMP

CCT	Lumen/ft	CRI Ra
2000K	**	**
2200K	**	**
2400K	**	**
2700K	**	**
3000K	**	**
3500K	**	**
4000K	**	**

### WET

[Calculated L70 = 70000 hrs]  
Tested with SW24/5.0-WET


CCT	Lumen/ft	CRI Ra
2000K	311	93
2200K	333	96
2400K	343	96
2700K	346	96
3000K	367	97
3500K	401	97
4000K	408	97


## TEMPERATURE RATINGS


		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	120°F
	Storage Temp	-4°F	140°F
	Installation Temp	50°F	100°F


## 4 / 5 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

**BW**  
  
Bare Wire 24"  
Stranded 22 AWG

**BRL**  
  
Barrel 6" - DRY/DMP |  
22 AWG

**BRL**  
  
Barrel 6" - WET | 22 AWG

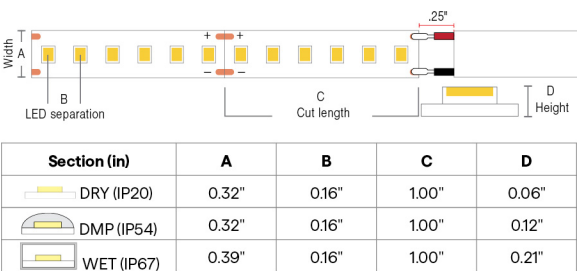
**CON6/CON24**  
  
6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

**CLS**  
  
Not soldered

## 6 WIRE COLOR



## 8 ILLUMINATED LENGTH - DIMENSIONS





SW24/5.0

LED Strips - Static White

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	

















# SW24/5.0

## LED Strips - Static White

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

<b>QUOVA-MICRO</b>  QUOVA Knife Edge	<b>SHIELD A - Small</b>  For standalone use	<b>SHIELD B - Small</b>  For use within extrusions	<b>BL-GRAZER</b>  Backwards L Mounting Bracket	<b>BL-MICRO</b>  Backwards L Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>SD-L-MEDIUM</b>  L Mounting Bracket	<b>SD-L-MICRO</b>  L Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket
<b>iQ-STRAP</b>  Plastic strap, Fits all LED strips	<b>iQ-CLIP-SS12</b>  Metal clip, Fits DMP strip	<b>iQ-CLIP-SS10</b>  Metal clip, Fits WET strip	<b>iQ-CLIP-PL</b>  Plastic clip, Fits WET strip						



# SW24/5.0

LED Strips - Static White

## COMPATIBLE WIRING ACCESSORIES

<b>SNP-LEAD</b>  Connects lead wire to LED strip DRY ONLY	<b>SNP-INLINE</b>  Connects LED strip to LED strip DRY ONLY	<b>CLP-LEAD</b>  Connects lead wire to LED strip DRY ONLY	<b>CLP-INLINE</b>  Connects LED strip to LED strip DRY ONLY	<b>Q-NECT-01-LEAD-24</b>  Connects LED board to 24" lead wire DRY ONLY	<b>Q-NECT-01-JUMP-3</b>  Connects two LED boards together with 3" jumper; DRY ONLY	<b>Q-NECT-01-INLINE</b>  Connects two LED boards together DRY ONLY	<b>Q-NECT-SCREW-LEAD-12</b>  Connects LED board to 12" lead wire DRY ONLY	<b>Q-NECT-SCREW-JUMP-12</b>  Connects two LED boards together with 12" jumper; DRY ONLY	<b>BARREL-EXT</b>  8ft barrel cable extender DRY ONLY
<b>BARREL FOUR-FER</b>  Splits lead from one to four LED Barrel connector fixtures; DRY/DMP	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP	<b>Q-mini-J</b>  UL Listed, miniature junction box; DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  UL Listed, miniature junction box; DRY/DMP (WET rated with silicone)	<b>INSTALLATION KITS</b>  LEAD or JUMP DRY and WET LED strip wiring kits			

## COMPATIBLE CONTROL ACCESSORIES

**SCENE APP DONGLE**

1.36"  
2.58"

Wi-Fi or Bluetooth Connectivity

## COMPATIBLE APPS

**NFC APP**

Read and write DMX addresses and adjust voltage