

# VERS-GRAZER-SK (04) STATIC WHITE

24VDC Linear Fixtures - Suspended

410.2 & 410.16 Closet Rated up to 4.0W/ft






- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors
- Optically enhanced VERSatile fixture with grazing properties ranging from 12° to 36°
- The high quality lens features a proprietary diffusing agent for superior beam control and clean edges
- Features integrated metal endcaps and durable anodized aluminum housings
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 LENS | 6 EXTERNAL LOUVER |
|---|---|---|---|---|---|
| | | | | | |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | BW | CLS | SV | AWM | SK | | | |

Sample Part Number: **VERS-04-SW-5.0-30-DRY-GZR-L1-BK-P1-CON6-CON6-BK-CL2-MG-BK-48"-E**

### 1 PRODUCT

**VERS-04-SK-SW**
**VERS-04-SK-SW-USA**

Select USA option for BAA and BABA projects.

See following pages for compatible power supplies.

### 2 WATTS/FT

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |
| **9.0HE** | 9.0W/ft HE |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |

### 3 CCT

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

### 4 RATED

| | |
|---|---|
| **DRY** | IP20 |

| | |
|---|---|
| **DMP** | IP54 |

### 5 LENS

| | |
|---|---|
| **25D** | Optical 25° |
| **GZR** | Grazer |

For representation of LED visibility, see Diode Visibility section on following pages.
For beam angles, see Photometric Performance section on following pages.

### 6 EXTERNAL LOUVER

| | |
|---|---|
| **L2-ST** | Satin Anodized Aluminum |
| **L2-BK** | Black Anodized Aluminum |
| **L2-WH** | White Powder Coated Aluminum |
| **N/A** | No Louver |

### 7 WIRE INPUT/OUTPUT

| | |
|---|---|
| **SINGLE (Input Only)** | |
| **S2** | Bottom Feed |

### 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 36") |

BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 9 CONNECTOR/WIRE OUT

| | |
|---|---|
| **CLS** | Closed End (No feed) |

BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

### 10 WIRE COLOR

| | |
|---|---|
| **SV** | Silver |

### 11 WIRE TYPE

| | |
|---|---|
| **AWM** | Appliance Wiring Material |

### 12 MOUNTING

| | |
|---|---|
| **SK** | Suspension Bracket |

### 13 FINISH

| | |
|---|---|
| **ST** | Satin |
| **BK** | Black |
| **BZ** | Bronze |
| **WH** | White |
| **CU** | Custom |

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.

### 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

### 15 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

PRELIMINARY SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less


# VERS-GRAZER-SK (04) STATIC WHITE

24VDC Linear Fixtures - Suspended


## 1 PRODUCT - DIMENSIONS




Profile with GZR lens




Profile with 25D lens




Profile with GZR & L1 Louver

## 2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-04-SK-SW-**-30-DRY

| | 1.5 W/FT | | 1.5HE W/FT | | 3.0 W/FT | | 3.0HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0HE W/FT | | 9.0HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| GZR | 169 | 98 | 216 | 98 | 294 | 98 | 404 | 97 | 372 | 98 | 449 | 98 | 751 | 98 | 1108 | 98 |
| 25D | 162 | 98 | 184 | 98 | 281 | 98 | 359 | 97 | 344 | 98 | 422 | 98 | 704 | 98 | 994 | 98 |


## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

**5W/ft** Grazer lens




**5W/ft** 25D lens




## TEMPERATURE RATINGS

| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 9.0 HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | -4°F | 100°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | — | — |

PRELIMINARY
SUBJECT TO CHANGE


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# VERS-GRAZER-SK (04) STATIC WHITE

24VDC Linear Fixtures - Suspended

## 7 WIRE INPUT/ OUTPUT


SINGLE (Input only)





## CONFIGURATION OPTIONS




Single Feed





Continuous Row End Feeds




Continuous Row Center Feeds

## 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.





Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

## 10 WIRE COLOR

Silver

## 12 MOUNTING




Suspension Bracket

2 required up to 6' lengths; additional support required between 6' to 8'

## 13 FINISH

Satin

Black

Bronze

White

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.

PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting


# VERS-GRAZER-SK (04) STATIC WHITE

24VDC Linear Fixtures - Suspended

## 15 EXACT/OPTIMAL FIXTURE LENGTH


E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

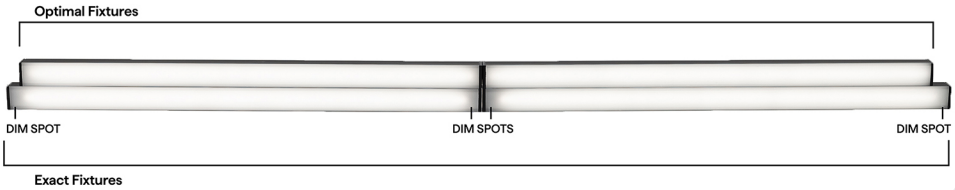



## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   End Feed |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

### OPTIMAL LENGTH

| Requested Nominal Length | S2   Bottom Feed |
|---|---|
| 12" | 11.49" |
| 13" | 12.49" |
| 14" | 13.49" |
| 15" | 14.49" |
| 16" | 15.49" |
| 17" | 16.49" |
| 18" | 17.49" |
| 19" | 18.49" |
| 20" | 19.49" |
| 21" | 20.49" |
| 22" | 21.49" |
| 23" | 22.49" |
| 24" | 23.49" |
| 36" | 35.49" |
| 48" | 47.49" |
| 60" | 59.49" |
| 72" | 71.49" |
| 84" | 83.49" |
| 96" | 95.49" |

PRELIMINARY SUBJECT TO CHANGE


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

# VERS-GRAZER-SK (04) STATIC WHITE


24VDC Linear Fixtures - Suspended

## SW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   End Feed |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S2   Bottom Feed |
|---|---|
| 12" | 10.49" |
| 13" | 12.49" |
| 14" | 12.49" |
| 15" | 14.49" |
| 16" | 14.49" |
| 17" | 16.49" |
| 18" | 16.49" |
| 19" | 18.49" |
| 20" | 18.49" |
| 21" | 20.49" |
| 22" | 20.49" |
| 23" | 22.49" |
| 24" | 22.49" |
| 36" | 34.49" |
| 48" | 46.49" |
| 60" | 58.49" |
| 72" | 70.49" |
| 84" | 82.49" |
| 96" | 94.49" |

PRELIMINARY SUBJECT TO CHANGE

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | |
|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 |
| 0.1% | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| 1% | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# VERS-GRAZER-SK (04) STATIC WHITE

24VDC Linear Fixtures - Suspended

| DIMMING PROTOCOL | INDOOR | |
|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND |
| Phase | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 |
| 0-10V | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN |
| ECO System | QTM-eLED(E) | QTM-eLED(E) |
| DMX | QZ-DMX | QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle |

PRELIMINARY
SUBJECT TO CHANGE

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting