




# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed



- When surface-mounted, this VERSatile fixture directs the light in an asymmetrical direction without having to angle the fixture, making it an excellent solution for illuminating artwork, signage, or even washing a ceiling detail.
- Features an extruded asymmetric lens with a proprietary diffusing agent that allows for light to be focused in a tight 45° beam that is shifted 30° off center
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional plastic louver accessory available in white or black for added glare control

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
				ASYM	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-03-WD-6.0-19/30-DRY-ASYM-N/A-PIA-BW-BW-BK-CL2-CC-BK-48"-E**


<div>1</div> <div>PRODUCT</div> <div><div>VERS-09-WD</div><div>LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.</div></div> <div><div>VERS-09-DW</div><div>VERS-09-DW-USA</div><div>Select USA option for BAA and BABA projects.</div><div>LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.</div></div>	<div>2</div> <div>WATTS/FT</div> <div><div>6.0</div><div>6.0W/ft</div></div> <div><div>1.5HE</div><div>1.5W/ft HE</div></div> <div><div>2.5HE</div><div>2.5W/ft HE</div></div> <div><div>4.0HE</div><div>4.0W/ft HE</div></div>	<div>3</div> <div>CCT</div> <div><div>19/27</div><div>1900K/2700K</div><div>19/30</div><div>1900K/3000K</div></div> <div><div>18/30</div><div>1800K/3000K</div><div>18/35</div><div>1800K/3500K</div><div>20/27</div><div>2000K/2700K</div><div>20/30</div><div>2000K/3000K</div><div>24/40</div><div>2400K/4000K</div><div>27/40</div><div>2700K/4000K</div><div>27/55</div><div>2700K/5500K</div></div>	<div>4</div> <div>RATED</div> <div><div>DRY</div><div>IP20</div></div> <div><div>DRY</div><div>IP20</div></div>	<div>5</div> <div>LENS</div> <div><div>ASYM</div><div>Asymmetric</div><div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div></div>	<div>6</div> <div>EXTERNAL LOUVER</div> <div><div>L1-WH</div><div>White Plastic</div><div>L1-BK</div><div>Black Plastic</div><div>N/A</div><div>No Louver</div><div>Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.</div></div>
<div>7</div> <div>WIRE INPUT/OUTPUT</div> <div><div>SINGLE (Input only)</div><div>S1A</div><div>End Feed</div><div>S1B</div><div>End Feed</div><div>S2A</div><div>Bottom Feed</div><div>S2B</div><div>Bottom Feed</div><div>S3A</div><div>Left Side Feed</div><div>S3B</div><div>Left Side Feed</div><div>S4A</div><div>Right Side Feed</div><div>S4B</div><div>Right Side Feed</div><div>PASS THROUGH (Input/output)</div><div>P1A</div><div>End Feed</div><div>P1B</div><div>End Feed</div><div>P2A</div><div>Bottom Feed</div><div>P2B</div><div>Bottom Feed</div><div>P3A</div><div>Left Side Feed</div><div>P3B</div><div>Left Side Feed</div><div>P4A</div><div>Right Side Feed</div><div>P4B</div><div>Right Side Feed</div></div>	<div>8</div> <div>CONNECTOR/WIRE IN</div> <div><div>BW</div><div>Bare Wire (Standard 36")</div><div>CON6</div><div>Connector 6"</div><div>CON24</div><div>Connector 24"</div><div>BW</div><div>Bare Wire (Standard 36")</div><div>CON6</div><div>Connector 6"</div><div>CON24</div><div>Connector 24"</div></div>	<div>9</div> <div>CONNECTOR/WIRE OUT</div> <div><div>CLS</div><div>Closed End (No feed)</div><div>BW</div><div>Bare Wire (Standard 36")</div><div>CON6</div><div>Connector 6"</div><div>CON24</div><div>Connector 24"</div></div>	<div>10</div> <div>WIRE COLOR</div> <div><div>WH</div><div>White</div><div>BK</div><div>Black</div></div>		
<div>When using TBC Mounting, a bare wire S2A/A2B wire feed is recommended. See install instructions for details.</div> <div>BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div>BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>					
<div>11</div> <div>WIRE TYPE</div> <div><div>CL2</div><div>Class 2</div><div>CL2P</div><div>Plenum Rated</div><div>CL2P only available with bare wire leads (BW)</div></div>	<div>12</div> <div>MOUNTING</div> <div><div>CC</div><div>Concealed Clip</div><div>MG</div><div>Magnet</div><div>TBC-03</div><div>9/16" Flat TB-Grid</div><div>TBC-04</div><div>15/16" Flat or Tegular TB-Grid</div><div>TBC-05</div><div>9/16" Tegular TB-Grid</div></div>	<div>13</div> <div>FINISH</div> <div><div>ST</div><div>Satin</div><div>BK</div><div>Black</div><div>BZ</div><div>Bronze</div><div>WH</div><div>White</div><div>CU</div><div>Custom</div><div>White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.</div></div>	<div>14</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</div></div>	<div>15</div> <div>EXACT/OPTIMAL</div> <div><div>O</div><div>Optimal Illumination</div><div>E</div><div>Exact Specified Length</div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</div></div>	




# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory




Profile with TBC-03




Profile with TBC-04




Profile with TBC-05




Profile with Louver




Profile with concealed clip and louver




Profile with magnetic clip and louver




Profile with magnet mount clip, magnetic mount accessory & louver




Profile with Louver




Profile with concealed clip and louver




Profile with magnetic clip and louver




Profile with magnet mount clip, magnetic mount accessory & louver




Profile with TBC-05 & Louver



Profile with TBC-06 & Louver



Profile with TBC-07 & Louver



Profile with TBC-08 & Louver

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VERS-09-WD-\*\*-30-DRY

	6.0 W/FT	
	LM/FT	CRI
ASYM	433	97

[Calculated L70 = 70000 hrs]  
Tested with VERS-09-DW-\*\*-30-DRY

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
ASYM	141	98	223	98	343	98



# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed


### 5 DIODE VISIBILITY



ASYM - Asymmetric lens

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




### TEMPERATURE RATINGS

		WD 6.0 W/FT		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F

### 6 EXTERNAL LOUVER

PLASTIC

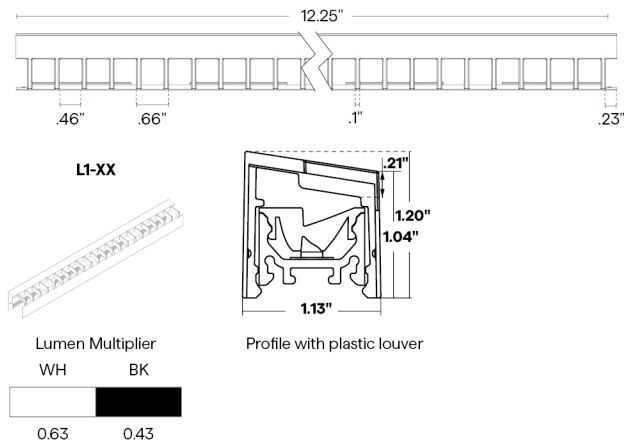




# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

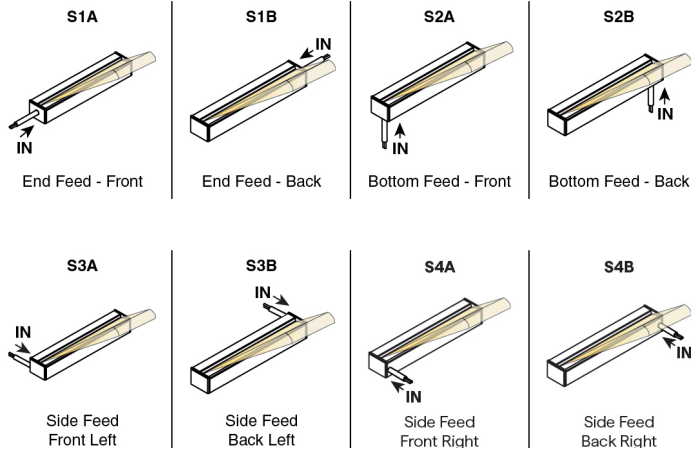

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

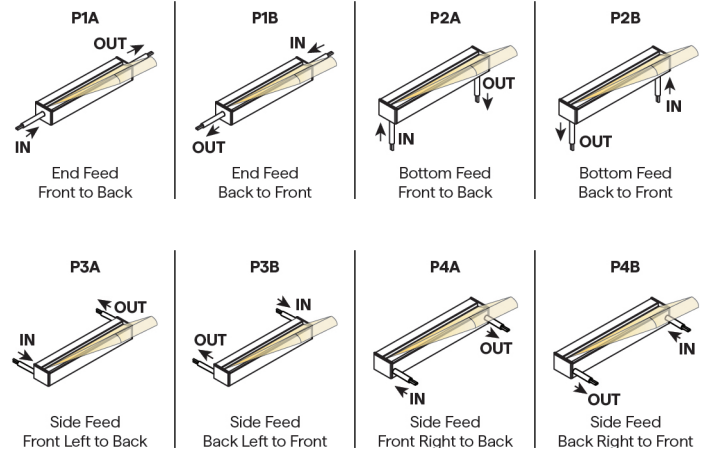

## CONFIGURATION OPTIONS

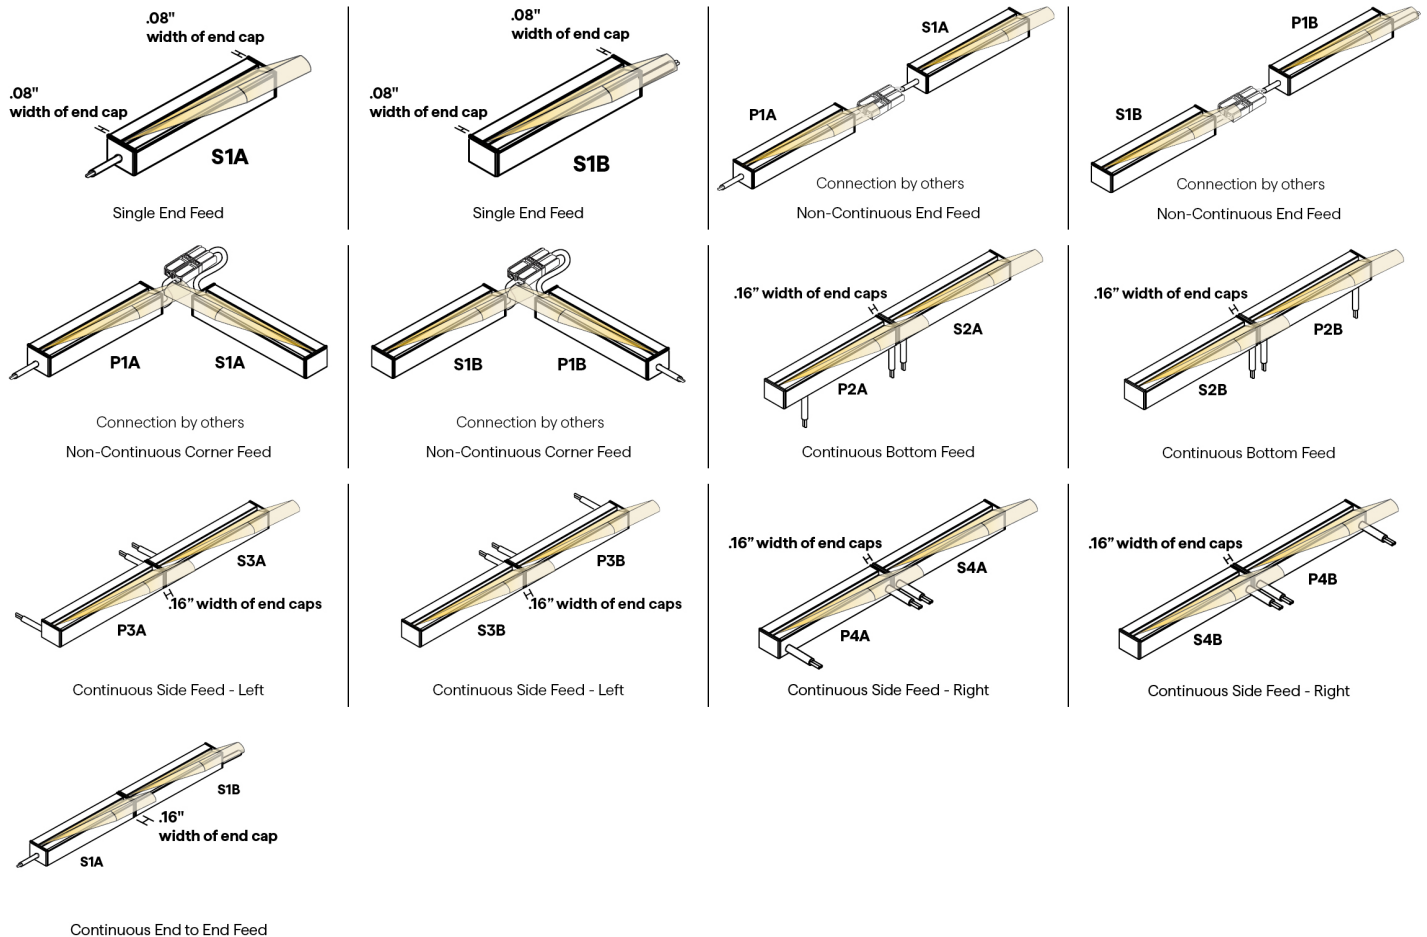




# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.



Bare Wire 36"  
22 AWG




Bare Wire 36"  
22 AWG



## 10 WIRE COLOR



## 12 MOUNTING




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.




Louver Concealed Clip  
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'


To order separately use CC-02 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.



Magnet Clip

One MG provided per foot  
To order separately use MG-02




Magnet Mount  
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface




Plastic T-Bar Clip

Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12'; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key




Plastic T-Bar Clip

Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12'; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key



Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12'; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05


Each pair of clips comes with M2.5 x 4mm set screw and Allen key



# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


## 13 FINISH



Custom finishes require a longer lead time, consult factory


## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

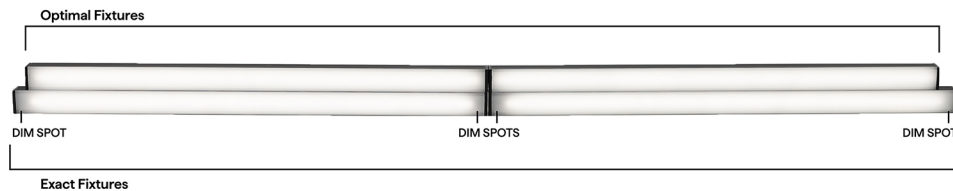

## WD DRY LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B		S3A/B & S4A/B		P3A/B & P4A/B	
	 S1 End Feed	 S2 Bottom Feed	 P1 End Feed	 P2 Bottom Feed	 S3 Side Feed - Left	 S4 Side Feed - Right	 P3 Side Feed - Left	 P4 Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	




# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B		S3A/B & S4A/B		P3A/B & P4A/B	
								
12"	10.59"		10.94"		10.49"		10.59"	
13"	12.59"		12.94"		12.49"		12.59"	
14"	12.59"		12.94"		12.49"		12.59"	
15"	14.59"		14.94"		14.49"		14.59"	
16"	14.59"		14.94"		14.49"		14.59"	
17"	16.59"		16.94"		16.49"		16.59"	
18"	16.59"		16.94"		16.49"		16.59"	
19"	18.59"		18.94"		18.49"		18.59"	
20"	18.59"		18.94"		18.49"		18.59"	
21"	20.59"		20.94"		20.49"		20.59"	
22"	20.59"		20.94"		20.49"		20.59"	
23"	22.59"		22.94"		22.49"		22.59"	
24"	22.59"		22.94"		22.49"		22.59"	
36"	34.59"		34.94"		34.49"		34.59"	
48"	46.59"		46.94"		46.49"		46.59"	
60"	58.59"		58.94"		58.49"		58.59"	
72"	70.59"		70.94"		70.49"		70.59"	
84"	82.59"		82.94"		82.49"		82.59"	
96"	94.59"		94.94"		94.49"		94.59"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle
















# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	
	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System		QTM-eLED(E)
DMX If using DW LED, wattage must be doubled		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>QUOVA-STANDARD</b>  QUOVA Knife Edge	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket
<b>NL-LARGE</b>  L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  1.86" .64" .58" 12" Magnet Mount Accessory for MG-02							






# VERS-ASYMMETRIC (09) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE WIRING ACCESSORIES



## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage