





VERS-CLEAR (03) RGB

24VDC Linear Fixtures - Surface & Recessed



- The fixture's flat lens sits flush, showcasing the versatile fixture's exceptional light performance in any indoor environment.
- Features integrated metal endcaps
- Mounting options include a concealed clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1 | 2 | 3 | 4 | 5 | 6 |
|-------------|-----------|-----|-------|------|-----------------|
| PRODUCT | WATTS/ FT | CCT | RATED | LENS | EXTERNAL LOUVER |
| VERS-03-RGB | 6.0 | RGB | | CL | |

ADDITIONAL INFORMATION REQUIRED TO ORDER

| 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
|--------------------|--------------------|---------------------|------------|-----------|----------|--------|-------------|----------------|
| WIRE INPUT/ OUTPUT | CONNECTOR/ WIRE IN | CONNECTOR/ WIRE OUT | WIRE COLOR | WIRE TYPE | MOUNTING | FINISH | LENGTH (IN) | EXACT/ OPTIMAL |
| | | | | | | | | |

Sample Part Number: **VERS-03-RGB-6.0-RGB-DRY-CL-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

| | | | | | |
|--|---|---|---|---|--|
| 1 PRODUCT VERS-03-RGB See following pages for compatible power supplies. | 2 WATTS/FT 6.0 6.0W/ft | 3 CCT RGB | 4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information | 5 LENS CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages | 6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers. |
| 7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed | 8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" | 9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" | 10 WIRE COLOR WH White BK Black | | |
| 11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW) | 12 MOUNTING CC Concealed Clip TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver | 13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory. Any white finish other than RAL 9003 must be custom ordered | 14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | 15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. | |

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)



VERS-CLEAR (03) RGB

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

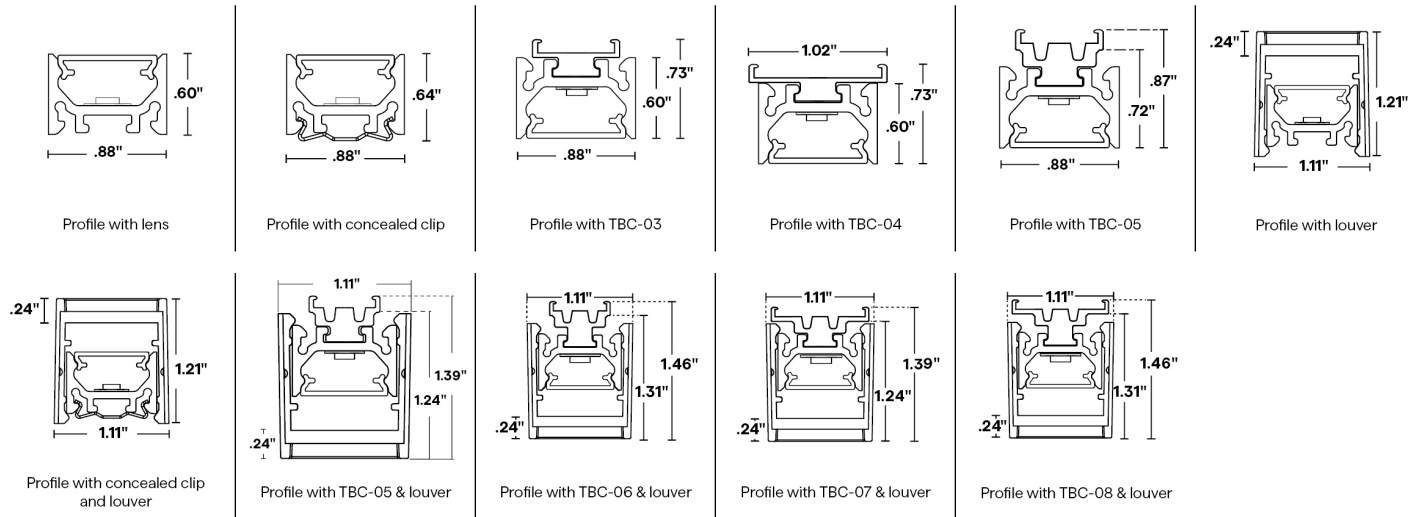

2 DELIVERED LUMENS

[Calculated L70 = 52000 hrs]
Tested with VERS-03-RGB-6.0-RGB-DRY

| | Red | | Green | | Blue | | All |
|----|-------|------------|-------|------------|-------|------------|-----|
| | LM/FT | Wavelength | LM/FT | Wavelength | LM/FT | Wavelength | |
| CL | 90 | 632 | 180 | 522 | 48 | 469 | 289 |


5 DIODE VISIBILITY



CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

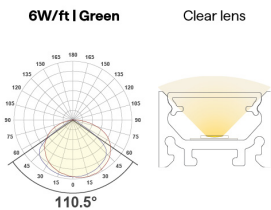



VERS-CLEAR (03) RGB


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


| | | 6.0 W/FT | |
|-----|----------------------------------|----------|-------|
| | | Min | Max |
| DRY | Ambient Operating Temp - Surface | -13°F | 105°F |
| DMP | Ambient Operating Temp - Surface | -13°F | 100°F |
| WET | Ambient Operating Temp - Surface | -13°F | 100°F |

6 EXTERNAL LOUVER

PLASTIC

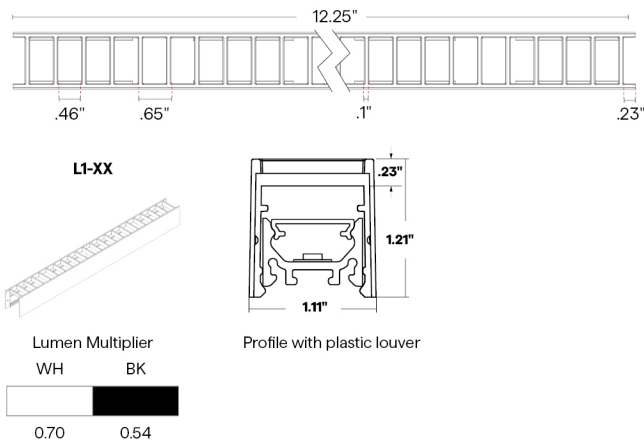


METAL

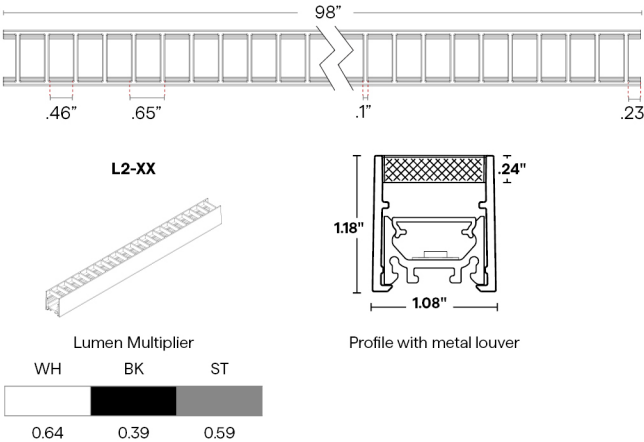


7 WIRE INPUT/OUTPUT

SINGLE (Input only)

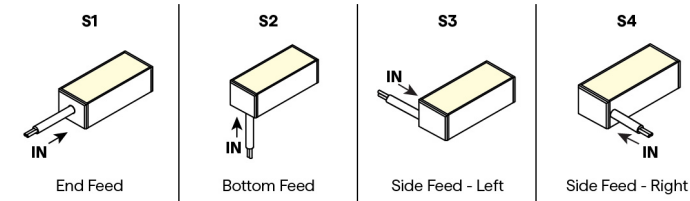

PASS THROUGH (Input/Output)

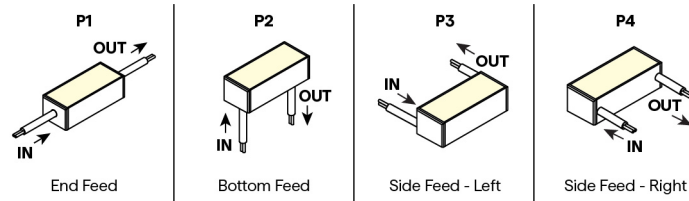



VERS-CLEAR (03) RGB


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS



8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

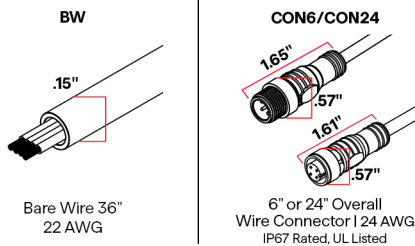

10 WIRE COLOR



12 MOUNTING

| | | | | |
|--|---|--|--|---|
| <p>CC (CC-01)</p> <p>Concealed Clip</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p> | <p>CC (CC-02)</p> <p>Louver Concealed Clip Required if L1 or L2 Louver is selected</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p> | <p>TBC-03</p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Flat Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-03</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-04</p> <p>Plastic T-Bar Clip</p> <p>Use on 15/16" Flat or Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-04</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> | <p>TBC-05</p> <p>Plastic T-Bar Clip</p> <p>Use on 9/16" Tegular Drop Ceiling</p> <p>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</p> <p>To order separately use TBC-05</p> <p>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</p> |
|--|---|--|--|---|



VERS-CLEAR (03) RGB

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

| | | |
|---|---|--|
| <div><div>TBC-06</div><div></div><div>Plastic T-Bar Clip</div></div> <div>Use with Louver on 9/16" Tegular Drop Ceiling</div> <div>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</div> <div>To order separately use TBC-06</div> <div>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</div> | <div><div>TBC-07</div><div></div><div>Plastic T-Bar Clip</div></div> <div>Use with Louver on 15/16" Flat Drop Ceiling</div> <div>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</div> <div>To order separately use TBC-07</div> <div>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</div> | <div><div>TBC-08</div><div></div><div>Plastic T-Bar Clip</div></div> <div>Use with Louver on 15/16" Tegular Drop Ceiling</div> <div>2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.</div> <div>To order separately use TBC-08</div> <div>Each pair of clips comes with M2.5 x 4mm set screw and Allen key</div> |
|---|---|--|


13 FINISH

| | |
|--|--------|
| | Satin |
| | Black |
| | Bronze |
| | White |

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

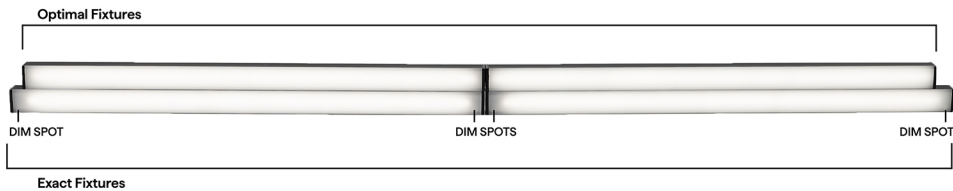




VERS-CLEAR (03) RGB




24VDC Linear Fixtures - Surface & Recessed

RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH


| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH







| Requested Nominal Length | S1 & S2  End Feed | S2  Bottom Feed | P1 & P2  End Feed | P2  Bottom Feed | S3 & S4  Side Feed - Left | S4  Side Feed - Right | P3 & P4  Side Feed - Left | P4  Side Feed - Right |
|--------------------------|--|--|--|---|--|--|--|--|
| 12" | 10.59" | | 10.94" | | 10.49" | | 10.59" | |
| 13" | 12.59" | | 12.94" | | 12.49" | | 12.59" | |
| 14" | 12.59" | | 12.94" | | 12.49" | | 12.59" | |
| 15" | 14.59" | | 14.94" | | 14.49" | | 14.59" | |
| 16" | 14.59" | | 14.94" | | 14.49" | | 14.59" | |
| 17" | 16.59" | | 16.94" | | 16.49" | | 16.59" | |
| 18" | 16.59" | | 16.94" | | 16.49" | | 16.59" | |
| 19" | 18.59" | | 18.94" | | 18.49" | | 18.59" | |
| 20" | 18.59" | | 18.94" | | 18.49" | | 18.59" | |
| 21" | 20.59" | | 20.94" | | 20.49" | | 20.59" | |
| 22" | 20.59" | | 20.94" | | 20.49" | | 20.59" | |
| 23" | 22.59" | | 22.94" | | 22.49" | | 22.59" | |
| 24" | 22.59" | | 22.94" | | 22.49" | | 22.59" | |
| 36" | 34.59" | | 34.94" | | 34.49" | | 34.59" | |
| 48" | 46.59" | | 46.94" | | 46.49" | | 46.59" | |
| 60" | 58.59" | | 58.94" | | 58.49" | | 58.59" | |
| 72" | 70.59" | | 70.94" | | 70.49" | | 70.59" | |
| 84" | 82.59" | | 82.94" | | 82.49" | | 82.59" | |
| 96" | 94.59" | | 94.94" | | 94.49" | | 94.59" | |

RGB WET LENGTHS BY INCH

EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture  |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2  End Feed | S2  Bottom Feed | P1 & P2  End Feed | P2  Bottom Feed | S3 & S4  Side Feed - Left | S4  Side Feed - Right | P3 & P4  Side Feed - Left | P4  Side Feed - Right |
|--------------------------|--|--|--|---|--|--|--|--|
| 12" | 10.74" | | 11.14" | | 10.64" | | 10.84" | |
| 13" | 12.74" | | 11.14" | | 12.64" | | 12.84" | |
| 14" | 12.74" | | 13.14" | | 12.64" | | 12.84" | |
| 15" | 14.74" | | 13.14" | | 14.64" | | 14.84" | |
| 16" | 14.74" | | 15.14" | | 14.64" | | 14.84" | |
| 17" | 16.74" | | 15.14" | | 16.64" | | 16.84" | |
| 18" | 16.74" | | 17.14" | | 16.64" | | 16.84" | |
| 19" | 18.74" | | 17.14" | | 18.64" | | 18.84" | |
| 20" | 18.74" | | 19.14" | | 18.64" | | 18.84" | |
| 21" | 20.74" | | 19.14" | | 20.64" | | 20.84" | |
| 22" | 20.74" | | 21.14" | | 20.64" | | 20.84" | |
| 23" | 22.74" | | 21.14" | | 22.64" | | 22.84" | |
| 24" | 22.74" | | 23.14" | | 22.64" | | 22.84" | |
| 36" | 34.74" | | 35.14" | | 34.64" | | 34.84" | |
| 48" | 46.74" | | 47.14" | | 46.64" | | 46.84" | |
| 60" | 58.74" | | 59.14" | | 58.64" | | 58.84" | |
| 72" | 70.74" | | 71.14" | | 70.64" | | 70.84" | |
| 84" | 82.74" | | 83.14" | | 82.64" | | 82.84" | |
| 96" | 94.74" | | 95.14" | | 94.64" | | 94.84" | |



VERS-CLEAR (03) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES


See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | OUTDOOR |
|--------------|--|---|
| | RGB | RGB |
| 0.1% | QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX | Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX |
| 1% | QZ-DALI-DT8 | Q-SET+QZ-DALI-DT8 QZ-DALI-DT8 |
| 10% | Non-Dim Power Supply with RGB App Dongle | |

| DIMMING PROTOCOL | INDOOR | OUTDOOR |
|------------------|--|---|
| | RGB | RGB |
| DMX | QTM-eLED+DMX QZ-DMX | Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX |
| DALI-2: DT8 | QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8 | Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8 |

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-M



1.41"
.71"

Adjustable mounting bracket - Medium


HINGE - HMB-L



1.46"
1.29"

Adjustable mounting bracket - Large


HINGE - HMB-XL



4"
1.46"

Adjustable mounting bracket - XLarge


Q-PIVOT



.75"
1.03"

Small mounting accessory


Q-ANGLE



2.23"
1.38"


Adjustable mounting accessory

NJ-LARGE




J Mounting Bracket

NU-LARGE




U Mounting Bracket

SD-J-LARGE




J Mounting Bracket

BL-LARGE




Backwards L Mounting Bracket

NL-LARGE



L Mounting Bracket


SD-L-LARGE



L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



2.80"
2.27"

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



VERS-CLEAR (03) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage