




# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed



- The fixture's flat lens sits flush, showcasing the versatile fixture's exceptional light performance in any indoor environment.
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER
				CL	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL

Sample Part Number: **VERS-03-SW-5.0-30-DRY-CL-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

<div>1</div> <div>PRODUCT</div> <div><div>VERS-03-SW</div><div>VERS-03-SW-USA</div><div>Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.</div><div>See following pages for compatible power supplies.</div></div>	<div>2</div> <div>WATTS/FT</div> <div><div><div>1.5</div><div>1.5W/ft</div></div><div><div>3.0</div><div>3.0W/ft</div></div><div><div>4.0</div><div>4.0W/ft</div></div><div><div>5.0</div><div>5.0W/ft</div></div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>3.0HE</div><div>3.0W/ft HE</div></div><div><div>6.0HE</div><div>6.0W/ft HE</div></div><div><div>9.0HE</div><div>9.0W/ft HE</div></div></div> <div><div><div>1.5</div><div>1.5W/ft</div></div><div><div>3.0</div><div>3.0W/ft</div></div><div><div>4.0</div><div>4.0W/ft</div></div><div><div>5.0</div><div>5.0W/ft</div></div><div><div>1.5HE</div><div>1.5W/ft HE</div></div><div><div>3.0HE</div><div>3.0W/ft HE</div></div><div><div>6.0HE</div><div>6.0W/ft HE</div></div></div> <div><div><div>1.5</div><div>1.5W/ft</div></div><div><div>3.0</div><div>3.0W/ft</div></div><div><div>4.0</div><div>4.0W/ft</div></div><div><div>5.0</div><div>5.0W/ft</div></div></div>	<div>3</div> <div>CCT</div> <div><div><div>18</div><div>1800K</div></div><div><div>20</div><div>2000K</div></div><div><div>22</div><div>2200K</div></div><div><div>24</div><div>2400K</div></div><div><div>27</div><div>2700K</div></div><div><div>30</div><div>3000K</div></div><div><div>35</div><div>3500K</div></div><div><div>40</div><div>4000K</div></div></div> <div><div><div>22</div><div>2200K</div></div><div><div>24</div><div>2400K</div></div><div><div>27</div><div>2700K</div></div><div><div>30</div><div>3000K</div></div><div><div>35</div><div>3500K</div></div><div><div>40</div><div>4000K</div></div></div> <div><div><div>18</div><div>1800K</div></div><div><div>20</div><div>2000K</div></div><div><div>22</div><div>2200K</div></div><div><div>24</div><div>2400K</div></div><div><div>27</div><div>2700K</div></div><div><div>30</div><div>3000K</div></div><div><div>35</div><div>3500K</div></div><div><div>40</div><div>4000K</div></div></div>	<div>4</div> <div>RATED</div> <div><div><div>DRY</div><div>IP20</div></div><div><div>DMP</div><div>IP54</div></div><div><div>WET</div><div>IP67</div></div><div>Can be suitable for exterior use, contact factory for more information</div></div>	<div>5</div> <div>LENS</div> <div><div><div>CL</div><div>Clear</div></div><div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div></div>	<div>6</div> <div>EXTERNAL LOUVER</div> <div><div><div>L1-WH</div><div>White Plastic</div></div><div><div>L1-BK</div><div>Black Plastic</div></div><div><div>L2-ST</div><div>Satin Anodized Aluminum</div></div><div><div>L2-BK</div><div>Black Anodized Aluminum</div></div><div><div>L2-WH</div><div>White Powder Coated Aluminum</div></div><div><div>N/A</div><div>No Louver</div></div></div> <div>Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.</div>
<div>7</div> <div>WIRE INPUT/OUTPUT</div> <div><div><div>SINGLE (Input only)</div><div><div>S1</div><div>End Feed</div></div><div><div>S2</div><div>Bottom Feed</div></div><div><div>S3</div><div>Left Side Feed</div></div><div><div>S4</div><div>Right Side Feed</div></div></div><div><div>PASS THROUGH (Input/output)</div><div><div>P1</div><div>End Feed</div></div><div><div>P2</div><div>Bottom Feed</div></div><div><div>P3</div><div>Left Side Feed</div></div><div><div>P4</div><div>Right Side Feed</div></div></div></div>	<div>8</div> <div>CONNECTOR/WIRE IN</div> <div><div><div>BW</div><div>Bare Wire (Standard 36")</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div></div> <div><div><div>BW</div><div>Bare Wire (Standard 36")</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div></div>	<div>9</div> <div>CONNECTOR/WIRE OUT</div> <div><div><div>CLS</div><div>Closed End (No feed)</div></div><div><div>BW</div><div>Bare Wire (Standard 36")</div></div><div><div>CON6</div><div>Connector 6"</div></div><div><div>CON24</div><div>Connector 24"</div></div></div>	<div>10</div> <div>WIRE COLOR</div> <div><div><div>WH</div><div>White</div></div><div><div>BK</div><div>Black</div></div></div>		
<div>When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.</div> <div>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div> <div>BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>					
<div>11</div> <div>WIRE TYPE</div> <div><div><div>CL2</div><div>Class 2</div></div><div><div>CL2P</div><div>Plenum Rated</div></div><div>CL2P only available with bare wire leads (BW)</div></div>	<div>12</div> <div>MOUNTING</div> <div><div><div>CC</div><div>Concealed Clip</div></div><div><div>MG</div><div>Magnet</div></div><div><div>TBC-03</div><div>9/16" Flat TB-Grid</div></div><div><div>TBC-04</div><div>15/16" Flat or Tegular TB-Grid</div></div><div><div>TBC-05</div><div>9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver</div></div><div><div>TBC-06</div><div>9/16" Tegular TB-Grid, with External Louver</div></div><div><div>TBC-07</div><div>15/16" Flat TB-Grid, with External Louver</div></div><div><div>TBC-08</div><div>15/16" Tegular TB-Grid, with External Louver</div></div></div>	<div>13</div> <div>FINISH</div> <div><div><div>ST</div><div>Satin</div></div><div><div>BK</div><div>Black</div></div><div><div>BZ</div><div>Bronze</div></div><div><div>WH</div><div>White</div></div><div><div>CU</div><div>Custom</div></div><div>White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.</div></div>	<div>14</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</div></div>	<div>15</div> <div>EXACT/OPTIMAL</div> <div><div><div>O</div><div>Optimal Illumination</div></div><div><div>E</div><div>Exact Specified Length</div></div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</div></div>	

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)



# VERS-CLEAR (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

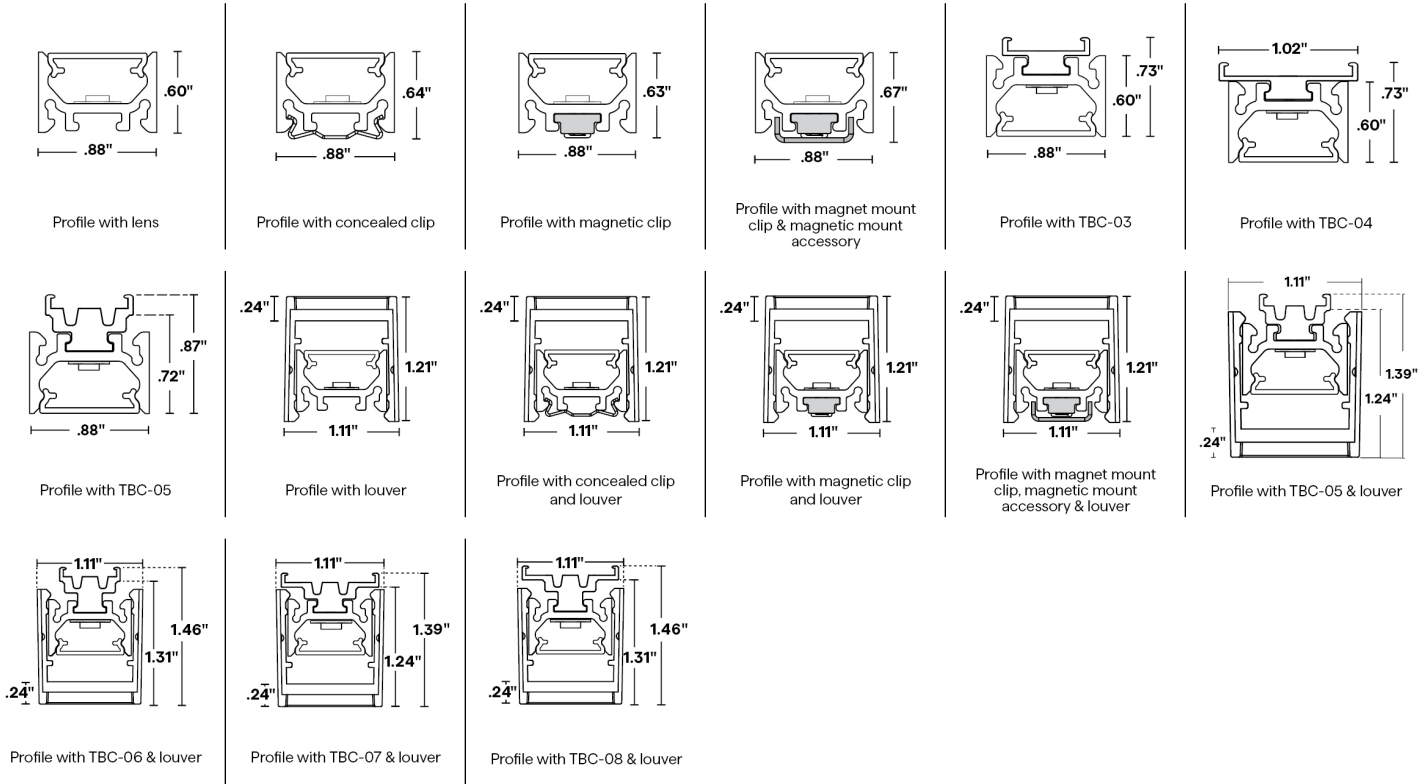


## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]  
Tested with VERS-03-SW-\*\*-30-DRY

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	158	98	200	98	276	98	381	98	356	98	427	98	692	98	1024	98

## 5 DIODE VISIBILITY






# VERS-CLEAR (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




## TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—

## 6 EXTERNAL LOUVER

PLASTIC

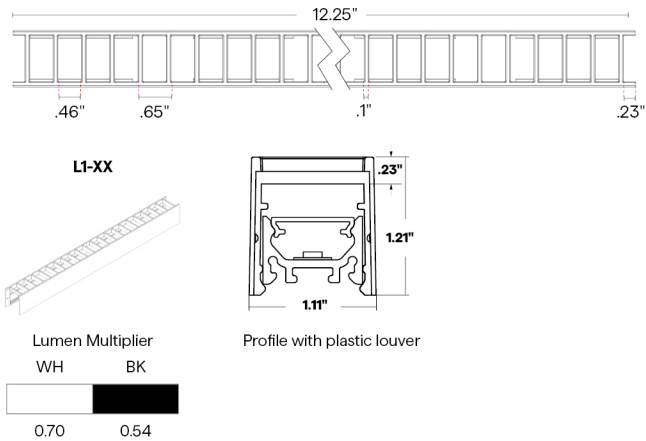

METAL

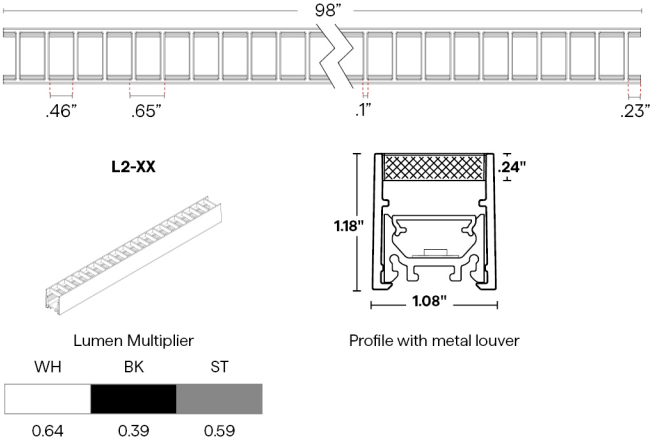




# VERS-CLEAR (03) STATIC WHITE


## 24VDC Linear Fixtures - Surface & Recessed

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

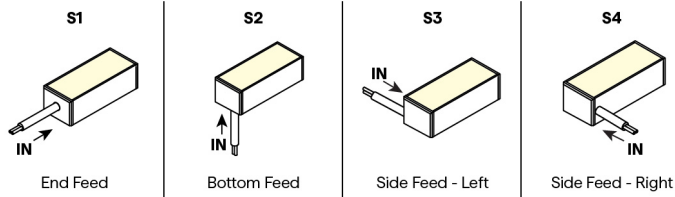

PASS THROUGH (Input/Output)

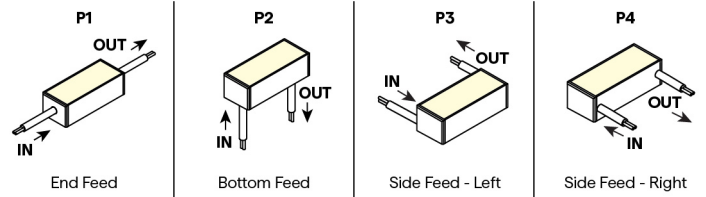


### CONFIGURATION OPTIONS

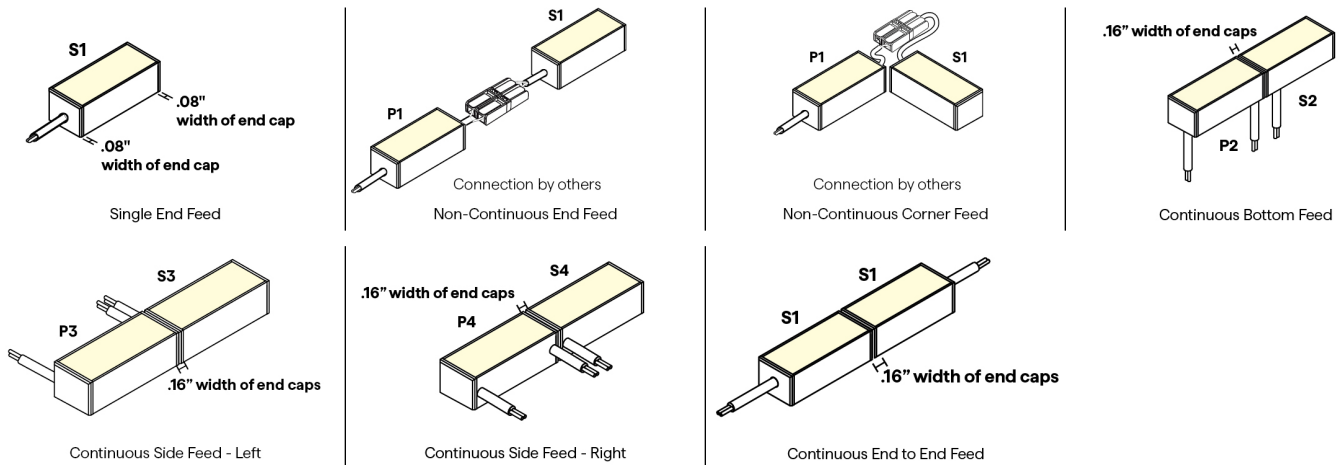

### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

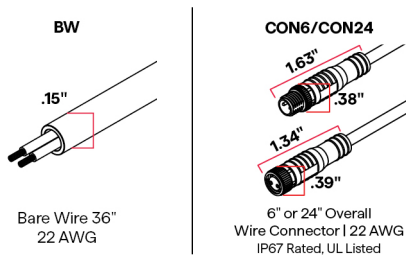

### 10 WIRE COLOR





# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### 12 MOUNTING

CC  
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

CC  
(CC-02)




Louver Concealed Clip  
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-02 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount  
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03  
Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### MOUNTING CONTINUED

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-06



Plastic T-Bar Clip


Use with Louver on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-06

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-07



Plastic T-Bar Clip


Use with Louver on 15/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-07

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-08



Plastic T-Bar Clip


Use with Louver on 15/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-08

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### 13 FINISH



Custom finishes require a longer lead time, consult factory




# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed


### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

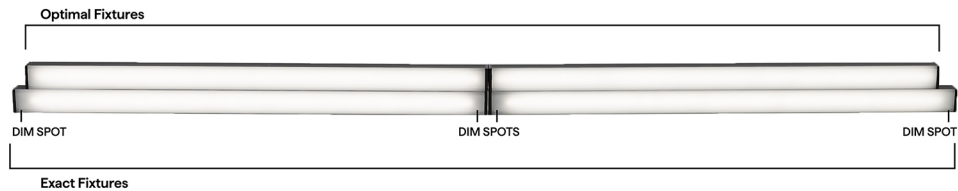


### SW DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed      Bottom Feed		P1 & P2  End Feed      Bottom Feed		S3 & S4  Side Feed - Left      Side Feed - Right		P3 & P4  Side Feed - Left      Side Feed - Right	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	11.49"		11.74"		11.34"		11.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	13.49"		13.74"		13.34"		13.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	15.49"		15.74"		15.34"		15.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	17.49"		17.74"		17.34"		17.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	19.49"		19.74"		19.34"		19.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	21.49"		21.74"		21.34"		21.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	23.49"		23.74"		23.34"		23.44"	
36"	35.49"		35.74"		35.34"		35.44"	
48"	47.49"		47.74"		47.34"		47.44"	
60"	59.49"		59.74"		59.34"		59.44"	
72"	71.49"		71.74"		71.34"		71.44"	
84"	83.49"		83.74"		83.34"		83.44"	
96"	95.49"		95.74"		95.34"		95.44"	




# VERS-CLEAR (03) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

## SW WET LENGTHS BY INCH

### EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH





Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	11.64"	11.79"	11.54"	11.64"
13"	12.64"	12.79"	12.54"	12.64"
14"	13.64"	13.79"	13.54"	13.64"
15"	14.64"	14.79"	14.54"	14.64"
16"	15.64"	15.79"	15.54"	15.64"
17"	16.64"	16.79"	16.54"	16.64"
18"	17.64"	17.79"	17.54"	17.64"
19"	18.64"	18.79"	18.54"	18.64"
20"	19.64"	19.79"	19.54"	19.64"
21"	20.64"	20.79"	20.54"	20.64"
22"	21.64"	21.79"	21.54"	21.64"
23"	22.64"	22.79"	22.54"	22.64"
24"	23.64"	23.79"	23.54"	23.64"
36"	35.64"	35.79"	35.54"	35.64"
48"	47.64"	47.79"	47.54"	47.64"
60"	59.64"	59.79"	59.54"	59.64"
72"	71.64"	71.79"	71.54"	71.64"
84"	83.64"	83.79"	83.54"	83.64"
96"	95.64"	95.79"	95.54"	95.64"

## SW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.49"	10.74"	10.34"	10.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	12.49"	12.74"	12.34"	12.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	14.49"	14.74"	14.34"	14.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	16.49"	16.74"	16.34"	16.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	18.49"	18.74"	18.34"	18.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	20.49"	20.74"	20.34"	20.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	22.49"	22.74"	22.34"	22.44"
36"	34.49"	34.74"	34.34"	34.44"
48"	46.49"	46.74"	46.34"	46.44"
60"	58.49"	58.74"	58.34"	58.44"
72"	70.49"	70.74"	70.34"	70.44"
84"	82.49"	82.74"	82.34"	82.44"
96"	94.49"	94.74"	94.34"	94.44"



# VERS-CLEAR (03) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	

















# VERS-CLEAR (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES






<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket	<b>NL-LARGE</b>  L Mounting Bracket
<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02								



# VERS-CLEAR (03) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP
--	---	--	--	---

## COMPATIBLE APPS

**NFC APP**  
  
Read and write DMX addresses and adjust voltage