





# VERS-DROP (10) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed



- Utilizes an extruded drop lens that sits proud of the fixture for maximum variations of LED sources
- The high-quality lens provides a three sided diffuse illumination
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look
- Mounting options include concealed clip, magnet clips or T-Bar clips
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information



STANDARD AND HE



BUY AMERICAN ACT COMPLIANT



BUILD AMERICA BUY AMERICA COMPLIANT



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER
					N/A

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-10-SW-5.0-30-DRY-DF-N/A-P1-BW-BW-BK-CL2-CC-BK-48"-E**

<b>1 PRODUCT</b> <b>VERS-10-SW</b> <b>VERS-10-SW-USA</b> Select USA option for BAA and BABA projects. Only DRY or WET ratings apply. See following pages for compatible power supplies.	<b>2 WATTS/FT</b> <table><tr><td>1.5</td><td>1.5W/ft</td><td>18</td><td>1800K</td></tr><tr><td>3.0</td><td>3.0W/ft</td><td>20</td><td>2000K</td></tr><tr><td>4.0</td><td>4.0W/ft</td><td>22</td><td>2200K</td></tr><tr><td>5.0</td><td>5.0W/ft</td><td>24</td><td>2400K</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td><td>27</td><td>2700K</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td><td>30</td><td>3000K</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td><td>35</td><td>3500K</td></tr><tr><td>9.0HE</td><td>9.0W/ft HE</td><td>40</td><td>4000K</td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td><td>22</td><td>2200K</td></tr><tr><td>3.0</td><td>3.0W/ft</td><td>24</td><td>2400K</td></tr><tr><td>4.0</td><td>4.0W/ft</td><td>27</td><td>2700K</td></tr><tr><td>5.0</td><td>5.0W/ft</td><td>30</td><td>3000K</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td><td>35</td><td>3500K</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td><td>40</td><td>4000K</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td><td></td><td></td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td><td>18</td><td>1800K</td></tr><tr><td>3.0</td><td>3.0W/ft</td><td>20</td><td>2000K</td></tr><tr><td>4.0</td><td>4.0W/ft</td><td>22</td><td>2200K</td></tr><tr><td>5.0</td><td>5.0W/ft</td><td>24</td><td>2400K</td></tr><tr><td></td><td></td><td>27</td><td>2700K</td></tr><tr><td></td><td></td><td>30</td><td>3000K</td></tr><tr><td></td><td></td><td>35</td><td>3500K</td></tr><tr><td></td><td></td><td>40</td><td>4000K</td></tr></table>	1.5	1.5W/ft	18	1800K	3.0	3.0W/ft	20	2000K	4.0	4.0W/ft	22	2200K	5.0	5.0W/ft	24	2400K	1.5HE	1.5W/ft HE	27	2700K	3.0HE	3.0W/ft HE	30	3000K	6.0HE	6.0W/ft HE	35	3500K	9.0HE	9.0W/ft HE	40	4000K	1.5	1.5W/ft	22	2200K	3.0	3.0W/ft	24	2400K	4.0	4.0W/ft	27	2700K	5.0	5.0W/ft	30	3000K	1.5HE	1.5W/ft HE	35	3500K	3.0HE	3.0W/ft HE	40	4000K	6.0HE	6.0W/ft HE			1.5	1.5W/ft	18	1800K	3.0	3.0W/ft	20	2000K	4.0	4.0W/ft	22	2200K	5.0	5.0W/ft	24	2400K			27	2700K			30	3000K			35	3500K			40	4000K	<b>3 CCT</b> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	<b>4 RATED</b> <table><tr><td>DRY</td><td>IP20</td></tr></table> <table><tr><td>DMP</td><td>IP54</td></tr></table> <table><tr><td>WET</td><td>IP67</td></tr><tr><td colspan="2">Can be suitable for exterior use, contact factory for more information</td></tr></table>	DRY	IP20	DMP	IP54	WET	IP67	Can be suitable for exterior use, contact factory for more information		<b>5 LENS</b> <table><tr><td>DF</td><td>Diffused</td></tr><tr><td>PR</td><td>Polar</td></tr></table> For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-10 for additional 25" lens option.	DF	Diffused	PR	Polar	<b>6 EXTERNAL LOUVER</b> <table><tr><td>N/A</td><td>No Louver</td></tr></table>	N/A	No Louver
1.5	1.5W/ft	18	1800K																																																																																																																																																								
3.0	3.0W/ft	20	2000K																																																																																																																																																								
4.0	4.0W/ft	22	2200K																																																																																																																																																								
5.0	5.0W/ft	24	2400K																																																																																																																																																								
1.5HE	1.5W/ft HE	27	2700K																																																																																																																																																								
3.0HE	3.0W/ft HE	30	3000K																																																																																																																																																								
6.0HE	6.0W/ft HE	35	3500K																																																																																																																																																								
9.0HE	9.0W/ft HE	40	4000K																																																																																																																																																								
1.5	1.5W/ft	22	2200K																																																																																																																																																								
3.0	3.0W/ft	24	2400K																																																																																																																																																								
4.0	4.0W/ft	27	2700K																																																																																																																																																								
5.0	5.0W/ft	30	3000K																																																																																																																																																								
1.5HE	1.5W/ft HE	35	3500K																																																																																																																																																								
3.0HE	3.0W/ft HE	40	4000K																																																																																																																																																								
6.0HE	6.0W/ft HE																																																																																																																																																										
1.5	1.5W/ft	18	1800K																																																																																																																																																								
3.0	3.0W/ft	20	2000K																																																																																																																																																								
4.0	4.0W/ft	22	2200K																																																																																																																																																								
5.0	5.0W/ft	24	2400K																																																																																																																																																								
		27	2700K																																																																																																																																																								
		30	3000K																																																																																																																																																								
		35	3500K																																																																																																																																																								
		40	4000K																																																																																																																																																								
18	1800K																																																																																																																																																										
20	2000K																																																																																																																																																										
22	2200K																																																																																																																																																										
24	2400K																																																																																																																																																										
27	2700K																																																																																																																																																										
30	3000K																																																																																																																																																										
35	3500K																																																																																																																																																										
40	4000K																																																																																																																																																										
22	2200K																																																																																																																																																										
24	2400K																																																																																																																																																										
27	2700K																																																																																																																																																										
30	3000K																																																																																																																																																										
35	3500K																																																																																																																																																										
40	4000K																																																																																																																																																										
18	1800K																																																																																																																																																										
20	2000K																																																																																																																																																										
22	2200K																																																																																																																																																										
24	2400K																																																																																																																																																										
27	2700K																																																																																																																																																										
30	3000K																																																																																																																																																										
35	3500K																																																																																																																																																										
40	4000K																																																																																																																																																										
DRY	IP20																																																																																																																																																										
DMP	IP54																																																																																																																																																										
WET	IP67																																																																																																																																																										
Can be suitable for exterior use, contact factory for more information																																																																																																																																																											
DF	Diffused																																																																																																																																																										
PR	Polar																																																																																																																																																										
N/A	No Louver																																																																																																																																																										
<b>7 WIRE INPUT/OUTPUT</b> <table><tr><td><b>SINGLE (Input only)</b></td></tr><tr><td>S1 End Feed</td></tr><tr><td>S2 Bottom Feed</td></tr><tr><td>S3 Left Side Feed</td></tr><tr><td>S4 Right Side Feed</td></tr></table> <table><tr><td><b>PASS THROUGH (Input/output)</b></td></tr><tr><td>P1 End Feed</td></tr><tr><td>P2 Bottom Feed</td></tr><tr><td>P3 Left Side Feed</td></tr><tr><td>P4 Right Side Feed</td></tr></table>	<b>SINGLE (Input only)</b>	S1 End Feed	S2 Bottom Feed	S3 Left Side Feed	S4 Right Side Feed	<b>PASS THROUGH (Input/output)</b>	P1 End Feed	P2 Bottom Feed	P3 Left Side Feed	P4 Right Side Feed	<b>8 CONNECTOR/WIRE IN</b> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	<b>9 CONNECTOR/WIRE OUT</b> <table><tr><td>CLS</td><td>Closed End (No feed)</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	CLS	Closed End (No feed)	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	<b>10 WIRE COLOR</b> <table><tr><td>WH</td><td>White</td></tr><tr><td>BK</td><td>Black</td></tr></table>	WH	White	BK	Black																																																																																																																						
<b>SINGLE (Input only)</b>																																																																																																																																																											
S1 End Feed																																																																																																																																																											
S2 Bottom Feed																																																																																																																																																											
S3 Left Side Feed																																																																																																																																																											
S4 Right Side Feed																																																																																																																																																											
<b>PASS THROUGH (Input/output)</b>																																																																																																																																																											
P1 End Feed																																																																																																																																																											
P2 Bottom Feed																																																																																																																																																											
P3 Left Side Feed																																																																																																																																																											
P4 Right Side Feed																																																																																																																																																											
BW	Bare Wire (Standard 36")																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																										
CLS	Closed End (No feed)																																																																																																																																																										
BW	Bare Wire (Standard 36")																																																																																																																																																										
CON6	Connector 6"																																																																																																																																																										
CON24	Connector 24"																																																																																																																																																										
WH	White																																																																																																																																																										
BK	Black																																																																																																																																																										
<b>11 WIRE TYPE</b> <table><tr><td>CL2</td><td>Class 2</td></tr><tr><td>CL2P</td><td>Plenum Rated</td></tr></table> CL2P only available with bare wire leads (BW)	CL2	Class 2	CL2P	Plenum Rated	<b>12 MOUNTING</b> <table><tr><td>CC</td><td>Concealed Clip</td></tr><tr><td>MG</td><td>Magnet</td></tr><tr><td>TBC-03</td><td>9/16" Flat TB-Grid</td></tr><tr><td>TBC-04</td><td>15/16" Flat or Tegalur TB-Grid</td></tr><tr><td>TBC-05</td><td>9/16" Tegalur TB-Grid</td></tr></table>	CC	Concealed Clip	MG	Magnet	TBC-03	9/16" Flat TB-Grid	TBC-04	15/16" Flat or Tegalur TB-Grid	TBC-05	9/16" Tegalur TB-Grid	<b>13 FINISH</b> <table><tr><td>ST</td><td>Satin</td></tr><tr><td>BK</td><td>Black</td></tr><tr><td>BZ</td><td>Bronze</td></tr><tr><td>WH</td><td>White</td></tr><tr><td>CU</td><td>Custom</td></tr></table> Custom finishes have longer lead times. Non-RAL 9003 whites custom.	ST	Satin	BK	Black	BZ	Bronze	WH	White	CU	Custom	<b>14 LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15 EXACT/OPTIMAL</b> <table><tr><td>O</td><td>Optimal Illumination</td></tr><tr><td>E</td><td>Exact Specified Length</td></tr></table> Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	O	Optimal Illumination	E	Exact Specified Length																																																																																																																											
CL2	Class 2																																																																																																																																																										
CL2P	Plenum Rated																																																																																																																																																										
CC	Concealed Clip																																																																																																																																																										
MG	Magnet																																																																																																																																																										
TBC-03	9/16" Flat TB-Grid																																																																																																																																																										
TBC-04	15/16" Flat or Tegalur TB-Grid																																																																																																																																																										
TBC-05	9/16" Tegalur TB-Grid																																																																																																																																																										
ST	Satin																																																																																																																																																										
BK	Black																																																																																																																																																										
BZ	Bronze																																																																																																																																																										
WH	White																																																																																																																																																										
CU	Custom																																																																																																																																																										
O	Optimal Illumination																																																																																																																																																										
E	Exact Specified Length																																																																																																																																																										

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# VERS-DROP (10) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 1 PRODUCT - DIMENSIONS




Profile with lens




Profile with concealed clip




Profile with magnetic clip




Profile with magnet mount clip & magnetic mount accessory



Profile with TBC-03



Profile with TBC-04




Profile with TBC-05

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]  
Tested with VERS-10-SW-\*\*-30-DRY

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	120	98	144	98	269	98	269	98	253	98	317	98	526	98	691	98
DF	113	98	136	98	253	98	253	98	234	98	295	98	472	98	664	98

## 5 DIODE VISIBILITY

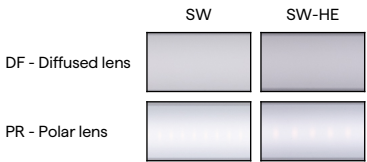




# VERS-DROP (10) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

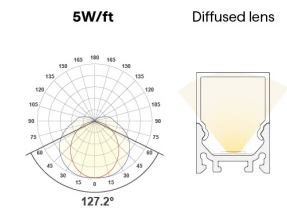


## TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

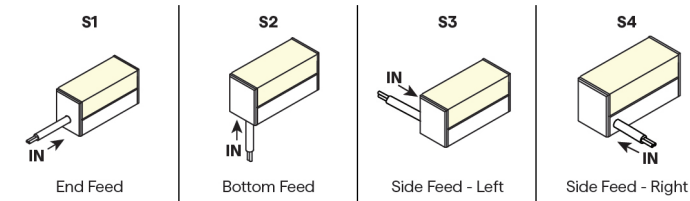

PASS THROUGH (Input/Output)

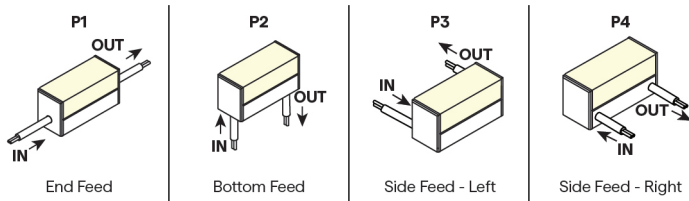

## CONFIGURATION OPTIONS

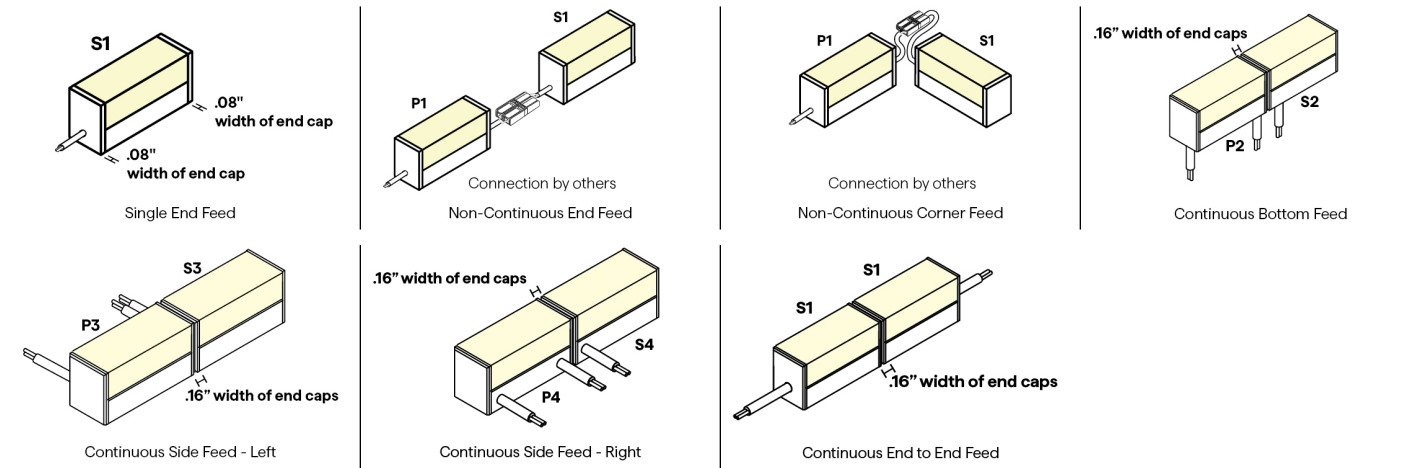




# VERS-DROP (10) STATIC WHITE


## 24VDC Linear Fixtures - Surface & Recessed

### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.



Bare Wire 36"  
22 AWG




6" or 24" Overall  
Wire Connector | 22 AWG  
IP67 Rated, UL Listed

### 10 WIRE COLOR



### 12 MOUNTING

CC  
(CC-01)



Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.


MG



Magnet Clip

One MG provided per foot  
To order separately use MG-02

MMA-02




Magnet Mount  
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip

Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05


Each pair of clips comes with M2.5 x 4mm set screw and Allen key



# VERS-DROP (10) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed


## 13 FINISH



Custom finishes require a longer lead time, consult factory


## 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.








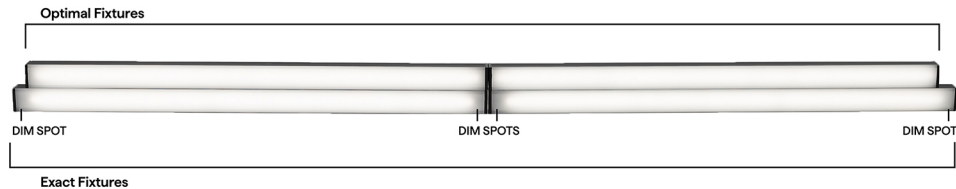


## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed	 Side Feed - Left	 Side Feed - Right	 Side Feed - Left	 Side Feed - Right
12"	11.49"		11.74"		11.34"		11.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	13.49"		13.74"		13.34"		13.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	15.49"		15.74"		15.34"		15.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	17.49"		17.74"		17.34"		17.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	19.49"		19.74"		19.34"		19.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	21.49"		21.74"		21.34"		21.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	23.49"		23.74"		23.34"		23.44"	
36"	35.49"		35.74"		35.34"		35.44"	
48"	47.49"		47.74"		47.34"		47.44"	
60"	59.49"		59.74"		59.34"		59.44"	
72"	71.49"		71.74"		71.34"		71.44"	
84"	83.49"		83.74"		83.34"		83.44"	
96"	95.49"		95.74"		95.34"		95.44"	




# VERS-DROP (10) STATIC WHITE


## 24VDC Linear Fixtures - Surface & Recessed

### SW WET LENGTHS BY INCH

#### EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

#### OPTIMAL LENGTH





Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	11.64"	11.79"	11.54"	11.64"
13"	12.64"	12.79"	12.54"	12.64"
14"	13.64"	13.79"	13.54"	13.64"
15"	14.64"	14.79"	14.54"	14.64"
16"	15.64"	15.79"	15.54"	15.64"
17"	16.64"	16.79"	16.54"	16.64"
18"	17.64"	17.79"	17.54"	17.64"
19"	18.64"	18.79"	18.54"	18.64"
20"	19.64"	19.79"	19.54"	19.64"
21"	20.64"	20.79"	20.54"	20.64"
22"	21.64"	21.79"	21.54"	21.64"
23"	22.64"	22.79"	22.54"	22.64"
24"	23.64"	23.79"	23.54"	23.64"
36"	35.64"	35.79"	35.54"	35.64"
48"	47.64"	47.79"	47.54"	47.64"
60"	59.64"	59.79"	59.54"	59.64"
72"	71.64"	71.79"	71.54"	71.64"
84"	83.64"	83.79"	83.54"	83.64"
96"	95.64"	95.79"	95.54"	95.64"

### SW-HE DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.49"	10.74"	10.34"	10.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	12.49"	12.74"	12.34"	12.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	14.49"	14.74"	14.34"	14.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	16.49"	16.74"	16.34"	16.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	18.49"	18.74"	18.34"	18.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	20.49"	20.74"	20.34"	20.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	22.49"	22.74"	22.34"	22.44"
36"	34.49"	34.74"	34.34"	34.44"
48"	46.49"	46.74"	46.34"	46.44"
60"	58.49"	58.74"	58.34"	58.44"
72"	70.49"	70.74"	70.34"	70.44"
84"	82.49"	82.74"	82.34"	82.44"
96"	94.49"	94.74"	94.34"	94.44"



# VERS-DROP (10) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	











# VERS-DROP (10) STATIC WHITE






## 24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71"	<b>HINGE - HMB-L</b>  1.46" 1.29"	<b>HINGE - HMB-XL</b>  1.46" 4"	<b>Q-PIVOT</b>  .75" 1.03"	<b>Q-ANGLE</b>  2.23" 1.38"	<b>NL-LARGE</b>  L Mounting Bracket	<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02
--	---	---	--	---	--	---	---

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>  2" 1.25"	<b>Q-mini-J5</b>  2.80" 2.27"	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP
---	---	---	---	--





# VERS-DROP (10) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

---

## COMPATIBLE CONTROL ACCESSORIES

### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage