





# VERS-INSERT (08) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed



- A VERSatile fixture with customizable options to meet the specific needs of various applications
- The batwing and prismatic lens options offer glare-reducing illumination
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control



STANDARD AND HE



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	LENS	EXTERNAL LOUVER

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **VERS-08-SW-5.0-30-DRY-GC-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E**

<b>1 PRODUCT</b> <b>VERS-08-SW</b> <b>VERS-08-SW-USA</b> Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  See following pages for compatible power supplies.	<b>2 WATTS/FT</b> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr><tr><td>9.0HE</td><td>9.0W/ft HE</td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr><tr><td>1.5HE</td><td>1.5W/ft HE</td></tr><tr><td>3.0HE</td><td>3.0W/ft HE</td></tr><tr><td>6.0HE</td><td>6.0W/ft HE</td></tr></table> <table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr></table>	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	9.0HE	9.0W/ft HE	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	1.5HE	1.5W/ft HE	3.0HE	3.0W/ft HE	6.0HE	6.0W/ft HE	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft	<b>3 CCT</b> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table> <table><tr><td>18</td><td>1800K</td></tr><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	18	1800K	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K	<b>4 RATED</b> <table><tr><td>DRY</td><td>IP20</td></tr></table> <table><tr><td>DMP</td><td>IP54</td></tr></table> <table><tr><td>WET</td><td>IP67</td></tr><tr><td colspan="2">Can be suitable for exterior use, contact factory for more information</td></tr></table>	DRY	IP20	DMP	IP54	WET	IP67	Can be suitable for exterior use, contact factory for more information		<b>5 LENS</b> <table><tr><td>BAT</td><td>Batwing</td></tr><tr><td>GC</td><td>Glare Control</td></tr></table> For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	BAT	Batwing	GC	Glare Control	<b>6 EXTERNAL LOUVER</b> <table><tr><td>L1-WH</td><td>White Plastic</td></tr><tr><td>L1-BK</td><td>Black Plastic</td></tr><tr><td>L2-ST</td><td>Satin Anodized Aluminum</td></tr><tr><td>L2-BK</td><td>Black Anodized Aluminum</td></tr><tr><td>L2-WH</td><td>White Powder Coated Aluminum</td></tr><tr><td>N/A</td><td>No Louver</td></tr></table> Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.	L1-WH	White Plastic	L1-BK	Black Plastic	L2-ST	Satin Anodized Aluminum	L2-BK	Black Anodized Aluminum	L2-WH	White Powder Coated Aluminum	N/A	No Louver
1.5	1.5W/ft																																																																																																														
3.0	3.0W/ft																																																																																																														
4.0	4.0W/ft																																																																																																														
5.0	5.0W/ft																																																																																																														
1.5HE	1.5W/ft HE																																																																																																														
3.0HE	3.0W/ft HE																																																																																																														
6.0HE	6.0W/ft HE																																																																																																														
9.0HE	9.0W/ft HE																																																																																																														
1.5	1.5W/ft																																																																																																														
3.0	3.0W/ft																																																																																																														
4.0	4.0W/ft																																																																																																														
5.0	5.0W/ft																																																																																																														
1.5HE	1.5W/ft HE																																																																																																														
3.0HE	3.0W/ft HE																																																																																																														
6.0HE	6.0W/ft HE																																																																																																														
1.5	1.5W/ft																																																																																																														
3.0	3.0W/ft																																																																																																														
4.0	4.0W/ft																																																																																																														
5.0	5.0W/ft																																																																																																														
18	1800K																																																																																																														
20	2000K																																																																																																														
22	2200K																																																																																																														
24	2400K																																																																																																														
27	2700K																																																																																																														
30	3000K																																																																																																														
35	3500K																																																																																																														
40	4000K																																																																																																														
22	2200K																																																																																																														
24	2400K																																																																																																														
27	2700K																																																																																																														
30	3000K																																																																																																														
35	3500K																																																																																																														
40	4000K																																																																																																														
18	1800K																																																																																																														
20	2000K																																																																																																														
22	2200K																																																																																																														
24	2400K																																																																																																														
27	2700K																																																																																																														
30	3000K																																																																																																														
35	3500K																																																																																																														
40	4000K																																																																																																														
DRY	IP20																																																																																																														
DMP	IP54																																																																																																														
WET	IP67																																																																																																														
Can be suitable for exterior use, contact factory for more information																																																																																																															
BAT	Batwing																																																																																																														
GC	Glare Control																																																																																																														
L1-WH	White Plastic																																																																																																														
L1-BK	Black Plastic																																																																																																														
L2-ST	Satin Anodized Aluminum																																																																																																														
L2-BK	Black Anodized Aluminum																																																																																																														
L2-WH	White Powder Coated Aluminum																																																																																																														
N/A	No Louver																																																																																																														
<b>7 WIRE INPUT/OUTPUT</b> <table><tr><td colspan="2"><b>SINGLE (Input only)</b></td></tr><tr><td>S1</td><td>End Feed</td></tr><tr><td>S2</td><td>Bottom Feed</td></tr><tr><td>S3</td><td>Left Side Feed</td></tr><tr><td>S4</td><td>Right Side Feed</td></tr></table> <table><tr><td colspan="2"><b>PASS THROUGH (Input/output)</b></td></tr><tr><td>P1</td><td>End Feed</td></tr><tr><td>P2</td><td>Bottom Feed</td></tr><tr><td>P3</td><td>Left Side Feed</td></tr><tr><td>P4</td><td>Right Side Feed</td></tr></table>	<b>SINGLE (Input only)</b>		S1	End Feed	S2	Bottom Feed	S3	Left Side Feed	S4	Right Side Feed	<b>PASS THROUGH (Input/output)</b>		P1	End Feed	P2	Bottom Feed	P3	Left Side Feed	P4	Right Side Feed	<b>8 CONNECTOR/WIRE IN</b> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	<b>9 CONNECTOR/WIRE OUT</b> <table><tr><td>CLS</td><td>Closed End (No feed)</td></tr></table> <table><tr><td>BW</td><td>Bare Wire (Standard 36")</td></tr><tr><td>CON6</td><td>Connector 6"</td></tr><tr><td>CON24</td><td>Connector 24"</td></tr></table>	CLS	Closed End (No feed)	BW	Bare Wire (Standard 36")	CON6	Connector 6"	CON24	Connector 24"	<b>10 WIRE COLOR</b> <table><tr><td>WH</td><td>White</td></tr><tr><td>BK</td><td>Black</td></tr></table>	WH	White	BK	Black																																																																
<b>SINGLE (Input only)</b>																																																																																																															
S1	End Feed																																																																																																														
S2	Bottom Feed																																																																																																														
S3	Left Side Feed																																																																																																														
S4	Right Side Feed																																																																																																														
<b>PASS THROUGH (Input/output)</b>																																																																																																															
P1	End Feed																																																																																																														
P2	Bottom Feed																																																																																																														
P3	Left Side Feed																																																																																																														
P4	Right Side Feed																																																																																																														
BW	Bare Wire (Standard 36")																																																																																																														
CON6	Connector 6"																																																																																																														
CON24	Connector 24"																																																																																																														
BW	Bare Wire (Standard 36")																																																																																																														
CON6	Connector 6"																																																																																																														
CON24	Connector 24"																																																																																																														
CLS	Closed End (No feed)																																																																																																														
BW	Bare Wire (Standard 36")																																																																																																														
CON6	Connector 6"																																																																																																														
CON24	Connector 24"																																																																																																														
WH	White																																																																																																														
BK	Black																																																																																																														
<b>11 WIRE TYPE</b> <table><tr><td>CL2</td><td>Class 2</td></tr><tr><td>CL2P</td><td>Plenum Rated</td></tr></table> CL2P only available with bare wire leads (BW)	CL2	Class 2	CL2P	Plenum Rated	<b>12 MOUNTING</b> <table><tr><td>CC</td><td>Concealed Clip</td></tr><tr><td>MG</td><td>Magnet</td></tr><tr><td>TBC-03</td><td>9/16" Flat TB-Grid</td></tr><tr><td>TBC-04</td><td>15/16" Flat or Tegular TB-Grid</td></tr><tr><td>TBC-05</td><td>9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver</td></tr><tr><td>TBC-06</td><td>9/16" Tegular TB-Grid, with External Louver</td></tr><tr><td>TBC-07</td><td>15/16" Flat TB-Grid, with External Louver</td></tr><tr><td>TBC-08</td><td>15/16" Tegular TB-Grid, with External Louver</td></tr></table>	CC	Concealed Clip	MG	Magnet	TBC-03	9/16" Flat TB-Grid	TBC-04	15/16" Flat or Tegular TB-Grid	TBC-05	9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver	TBC-06	9/16" Tegular TB-Grid, with External Louver	TBC-07	15/16" Flat TB-Grid, with External Louver	TBC-08	15/16" Tegular TB-Grid, with External Louver	<b>13 FINISH</b> <table><tr><td>ST</td><td>Satin</td></tr><tr><td>BK</td><td>Black</td></tr><tr><td>BZ</td><td>Bronze</td></tr><tr><td>WH</td><td>White</td></tr><tr><td>CU</td><td>Custom</td></tr></table> White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.	ST	Satin	BK	Black	BZ	Bronze	WH	White	CU	Custom	<b>14 LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15 EXACT/OPTIMAL</b> <table><tr><td>O</td><td>Optimal Illumination</td></tr><tr><td>E</td><td>Exact Specified Length</td></tr></table> Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	O	Optimal Illumination	E	Exact Specified Length																																																																									
CL2	Class 2																																																																																																														
CL2P	Plenum Rated																																																																																																														
CC	Concealed Clip																																																																																																														
MG	Magnet																																																																																																														
TBC-03	9/16" Flat TB-Grid																																																																																																														
TBC-04	15/16" Flat or Tegular TB-Grid																																																																																																														
TBC-05	9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver																																																																																																														
TBC-06	9/16" Tegular TB-Grid, with External Louver																																																																																																														
TBC-07	15/16" Flat TB-Grid, with External Louver																																																																																																														
TBC-08	15/16" Tegular TB-Grid, with External Louver																																																																																																														
ST	Satin																																																																																																														
BK	Black																																																																																																														
BZ	Bronze																																																																																																														
WH	White																																																																																																														
CU	Custom																																																																																																														
O	Optimal Illumination																																																																																																														
E	Exact Specified Length																																																																																																														

When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)



# VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

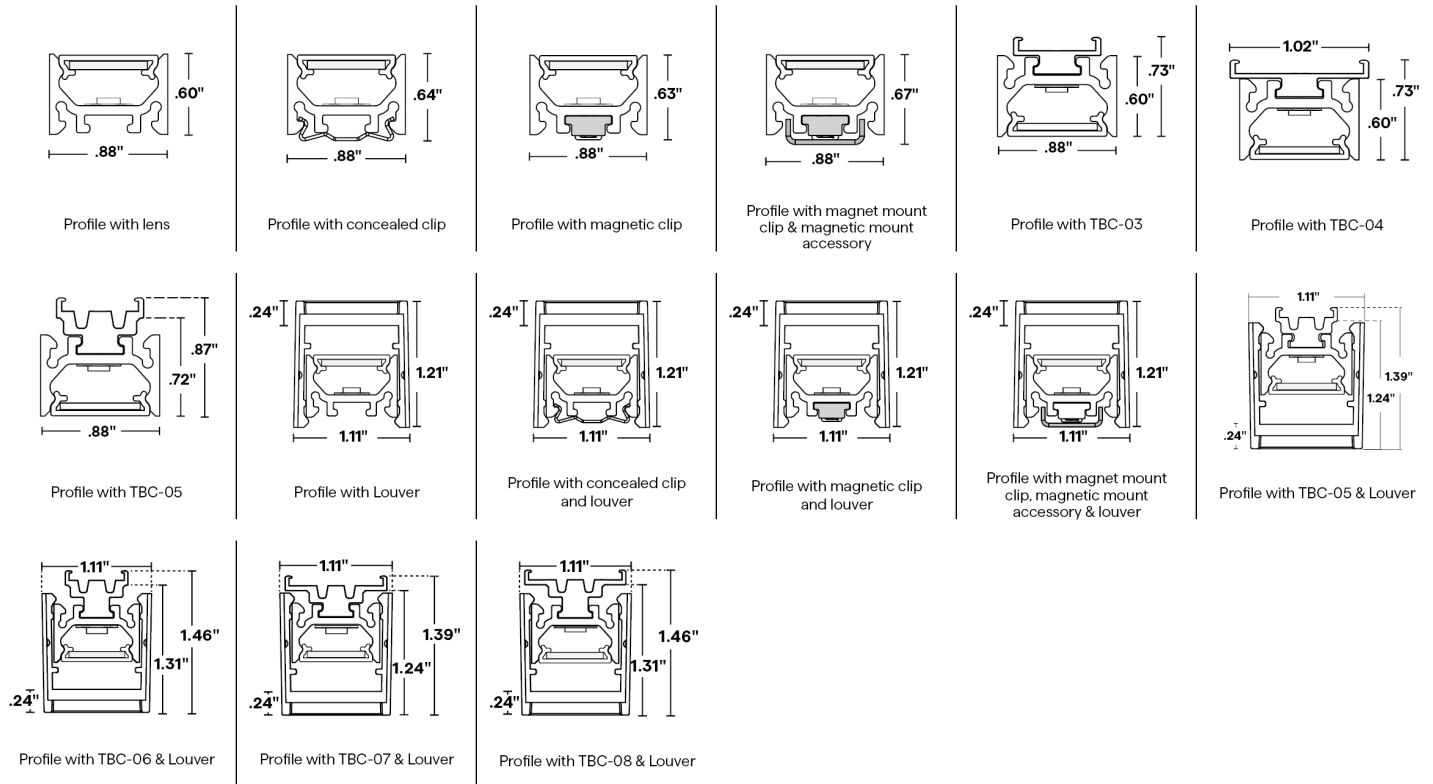


## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]  
Tested with VERS-08-SW-\*\*-30-DRY

	1.5 W/FT			1.5HE W/FT			3.0 W/FT			3.0HE W/FT			4.0 W/FT			5.0 W/FT			6.0HE W/FT			9.0HE W/FT		
	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR	LM/FT	CRI	UGR
BAT	130	98	N/A	149	98	N/A	226	98	N/A	290	97	N/A	282	98	N/A	349	98	N/A	581	98	N/A	797	98	N/A
GC	142	98	≤17.8	167	98	≤18.8	260	98	≤19.7	330	97	≤21.0	315	98	≤20.5	382	98	≤21.7	602	98	≤23.3	818	98	≤24.4

## 5 DIODE VISIBILITY

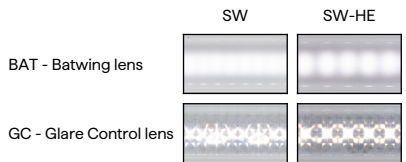




# VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

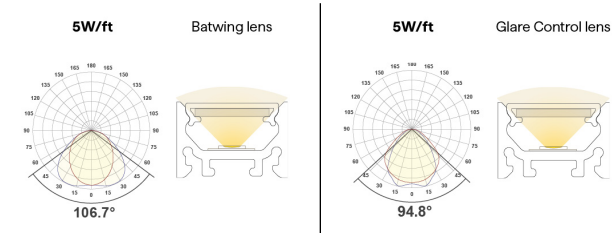


## TEMPERATURE RATINGS


		1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		4.0 W/FT		5.0 W/FT		6.0 HE W/FT		9.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	130°F	-4°F	135°F	-4°F	125°F	-4°F	120°F	-4°F	120°F	-4°F	100°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	120°F	-4°F	115°F	-4°F	115°F	-13°F	95°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	—	—	-4°F	125°F	—	—	-4°F	120°F	-4°F	115°F	—	—	—	—

## 6 EXTERNAL LOUVER

PLASTIC

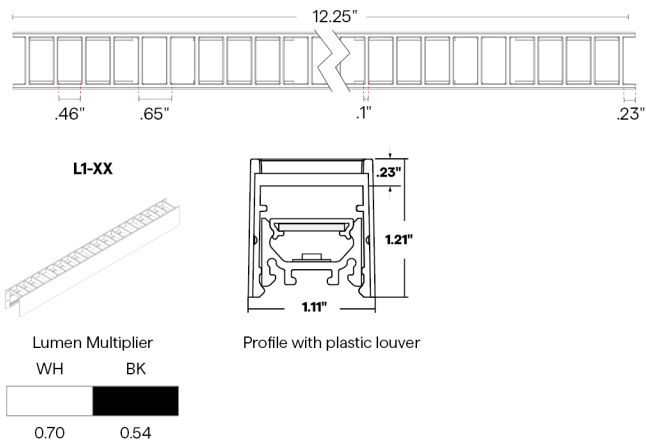

METAL

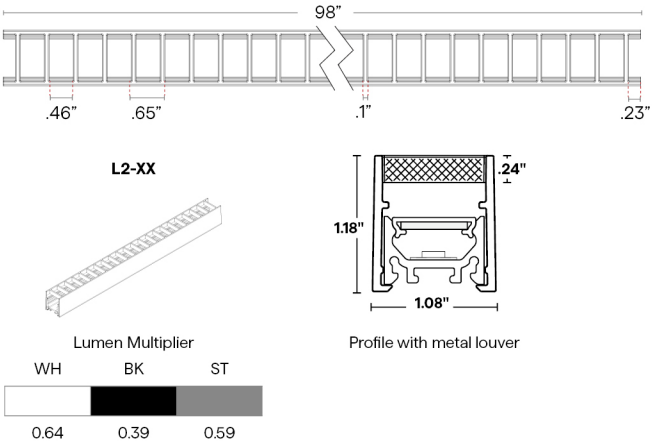




# VERS-INSERT (08) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

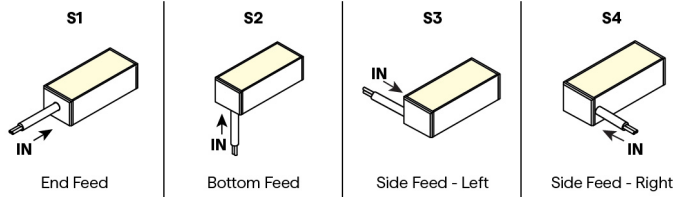

PASS THROUGH (Input/Output)

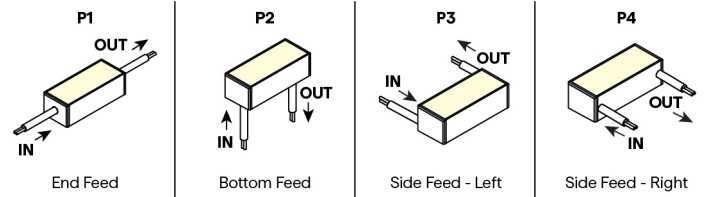


## CONFIGURATION OPTIONS

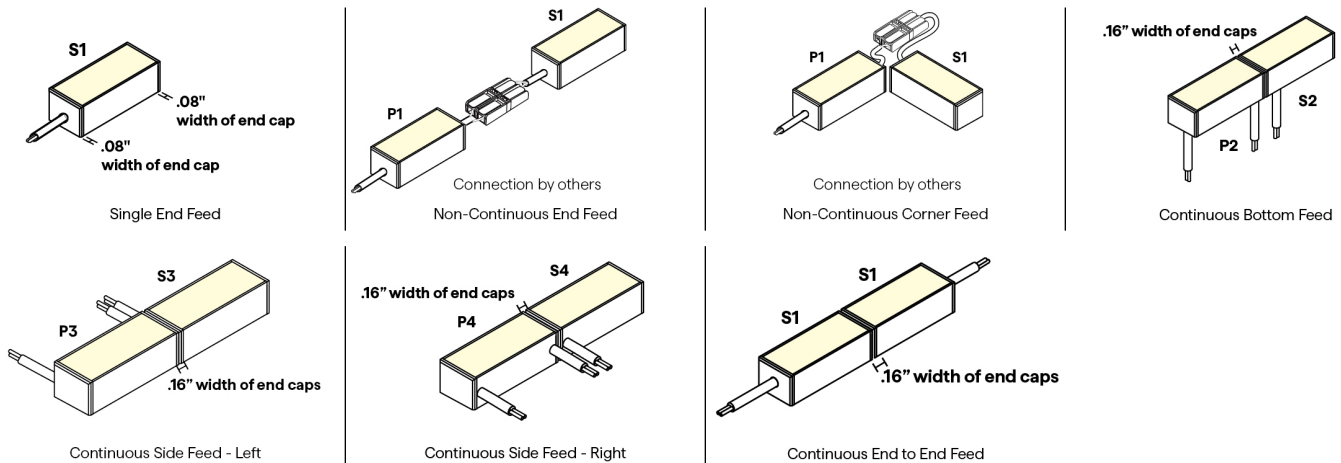


## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

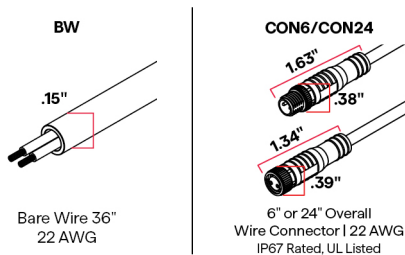

## 10 WIRE COLOR





# VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## 12 MOUNTING

CC  
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

CC  
(CC-02)




Louver Concealed Clip  
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-02 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.


MG



Magnet Clip

One MG provided per foot  
To order separately use MG-02

MMA-02




Magnet Mount  
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03  
Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## MOUNTING CONTINUED

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-06



Plastic T-Bar Clip


Use with Louver on 9/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-06

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-07



Plastic T-Bar Clip


Use with Louver on 15/16" Flat Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-07

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-08



Plastic T-Bar Clip

Use with Louver on 15/16" Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-08

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## 13 FINISH



Custom finishes require a longer lead time, consult factory




# VERS-INSERT (08) STATIC WHITE

## 24VDC Linear Fixtures - Surface & Recessed


### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

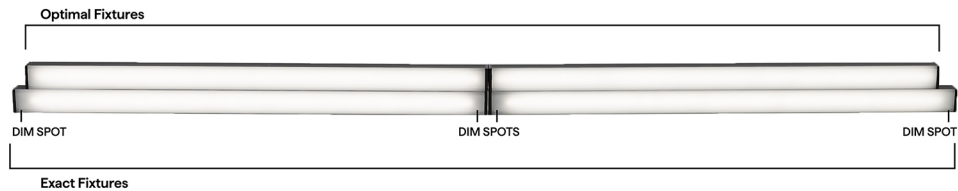


### SW DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed  Bottom Feed		P1 & P2  End Feed  Bottom Feed		S3 & S4  Side Feed - Left  Side Feed - Right		P3 & P4  Side Feed - Left  Side Feed - Right	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	11.49"		11.74"		11.34"		11.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	13.49"		13.74"		13.34"		13.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	15.49"		15.74"		15.34"		15.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	17.49"		17.74"		17.34"		17.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	19.49"		19.74"		19.34"		19.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	21.49"		21.74"		21.34"		21.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	23.49"		23.74"		23.34"		23.44"	
36"	35.49"		35.74"		35.34"		35.44"	
48"	47.49"		47.74"		47.34"		47.44"	
60"	59.49"		59.74"		59.34"		59.44"	
72"	71.49"		71.74"		71.34"		71.44"	
84"	83.49"		83.74"		83.34"		83.44"	
96"	95.49"		95.74"		95.34"		95.44"	




# VERS-INSERT (08) STATIC WHITE



24VDC Linear Fixtures - Surface & Recessed

## SW WET LENGTHS BY INCH

### EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH









Requested Nominal Length	S1 & S2  End Feed	S2  Bottom Feed	P1 & P2  End Feed	P2  Bottom Feed	S3 & S4  Side Feed - Left	S4  Side Feed - Right	P3 & P4  Side Feed - Left	P4  Side Feed - Right
12"	11.64"		11.79"		11.54"		11.64"	
13"	12.64"		12.79"		12.54"		12.64"	
14"	13.64"		13.79"		13.54"		13.64"	
15"	14.64"		14.79"		14.54"		14.64"	
16"	15.64"		15.79"		15.54"		15.64"	
17"	16.64"		16.79"		16.54"		16.64"	
18"	17.64"		17.79"		17.54"		17.64"	
19"	18.64"		18.79"		18.54"		18.64"	
20"	19.64"		19.79"		19.54"		19.64"	
21"	20.64"		20.79"		20.54"		20.64"	
22"	21.64"		21.79"		21.54"		21.64"	
23"	22.64"		22.79"		22.54"		22.64"	
24"	23.64"		23.79"		23.54"		23.64"	
36"	35.64"		35.79"		35.54"		35.64"	
48"	47.64"		47.79"		47.54"		47.64"	
60"	59.64"		59.79"		59.54"		59.64"	
72"	71.64"		71.79"		71.54"		71.64"	
84"	83.64"		83.79"		83.54"		83.64"	
96"	95.64"		95.79"		95.54"		95.64"	

## SW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed	S2  Bottom Feed	P1 & P2  End Feed	P2  Bottom Feed	S3 & S4  Side Feed - Left	S4  Side Feed - Right	P3 & P4  Side Feed - Left	P4  Side Feed - Right
12"	10.49"		10.74"		10.34"		10.44"	
13"	12.49"		12.74"		12.34"		12.44"	
14"	12.49"		12.74"		12.34"		12.44"	
15"	14.49"		14.74"		14.34"		14.44"	
16"	14.49"		14.74"		14.34"		14.44"	
17"	16.49"		16.74"		16.34"		16.44"	
18"	16.49"		16.74"		16.34"		16.44"	
19"	18.49"		18.74"		18.34"		18.44"	
20"	18.49"		18.74"		18.34"		18.44"	
21"	20.49"		20.74"		20.34"		20.44"	
22"	20.49"		20.74"		20.34"		20.44"	
23"	22.49"		22.74"		22.34"		22.44"	
24"	22.49"		22.74"		22.34"		22.44"	
36"	34.49"		34.74"		34.34"		34.44"	
48"	46.49"		46.74"		46.34"		46.44"	
60"	58.49"		58.74"		58.34"		58.44"	
72"	70.49"		70.74"		70.34"		70.44"	
84"	82.49"		82.74"		82.34"		82.44"	
96"	94.49"		94.74"		94.34"		94.44"	



# VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	

















# VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES






<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>NJ-LARGE</b>  J Mounting Bracket	<b>NU-LARGE</b>  U Mounting Bracket	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>BL-LARGE</b>  Backwards L Mounting Bracket	<b>NL-LARGE</b>  L Mounting Bracket
<b>SD-L-LARGE</b>  L Mounting Bracket	<b>MMA-02</b>  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02								



# VERS-INSERT (08) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE WIRING ACCESSORIES

<b>Q-mini-J</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>Q-mini-J5</b>  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	<b>CON120-EXT</b>  10ft Con cable extender DRY/DMP/WET	<b>CON FOUR-FER</b>  Splits lead from one to four LED Con connectors DRY/DMP/WET	<b>CON M - BARREL F</b>  Male con to barrel cable adaptor DRY/DMP
--	---	--	--	---

## COMPATIBLE APPS

**NFC APP**  
  
Read and write DMX addresses and adjust voltage