




# ESSENTIALS ARKA-FLAT (01) SW-HE

## 24VDC Linear Fixtures - Corner & Surface



- Corner and surface mount linear fixture with rounded lens
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information



### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **AK1SW-3.0HE-30-DRY-STD-P1-BW-BW-BK-CL2-SST-BK-48"-E**

<div>1</div> <div>PRODUCT</div> <div>AK1SW AK1SW-USA</div> <div>Select USA option for BAA and BABA projects. SW-HE only. Only DRY ratings apply.</div> <div>See following pages for compatible power supplies.</div>	<div>2</div> <div>WATTS/FT</div> <div><div>1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE</div><div>3.0HE+ 3.0W/ft HE+ 6.0HE+ 6.0W/ft HE+</div><div>1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE</div><div>3.0HE+ 3.0W/ft HE+ 6.0HE+ 6.0W/ft HE+</div></div>	<div>3</div> <div>CCT</div> <div><div>20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K</div><div>27 2700K 30 3000K 35 3500K 40 4000K</div><div>24 2400K 27 2700K 30 3000K 35 3500K 40 4000K</div><div>27 2700K 30 3000K 35 3500K 40 4000K</div></div>	<div>4</div> <div>RATED</div> <div><div>DRY IP20</div><div>DMP IP54</div><div>WET IP67</div><div>Can be suitable for exterior use, contact factory for more information</div></div>	<div>5</div> <div>EFFICIENCY</div> <div><div>STD Standard WO White Optics</div><div>WhiteOptics - Internal coating, greater lumen output</div></div>	<div>6</div> <div>LENS</div> <div><div>DF Diffused PR Polar FR Frosted CL Clear</div><div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div></div>			
<div>7</div> <div>WIRE INPUT/OUTPUT</div> <div><div>SINGLE (Input only) S1 End Feed</div><div>PASS THROUGH (Input/output) P1 End Feed</div></div>	<div>8</div> <div>CONNECTOR/WIRE IN</div> <div><div>BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"</div><div>BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"</div></div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>9</div> <div>CONNECTOR/WIRE OUT</div> <div><div>CLS Closed End (No feed)</div><div>BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"</div></div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>10</div> <div>WIRE COLOR</div> <div><div>WH White BK Black N/A For Barrel</div><div>wet barrel only available in black</div></div>	<div>11</div> <div>WIRE TYPE</div> <div><div>CL2 Class 2 CL2P Plenum Rated N/A For Barrel</div><div>CL2P only available with bare wire leads (BW)</div></div>	<div>12</div> <div>MOUNTING</div> <div><div>SST Stainless Steel PL Plastic Clip</div></div>	<div>13</div> <div>FINISH</div> <div><div>ST Satin BK Black BZ Bronze CU Custom</div><div>Custom finishes require a longer lead time, consult factory</div></div>	<div>14</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</div></div>	<div>15</div> <div>EXACT/OPTIMAL</div> <div><div>O Optimal Illumination E Exact Specified Length</div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</div></div>

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# ESSENTIALS ARKA-FLAT (01) SW-HE

24VDC Linear Fixtures - Corner & Surface


## 1 PRODUCT - DIMENSIONS



Profile



Profile with stainless steel mounting clip



Profile with plastic mounting clip

## 2 DELIVERED LUMENS


[Calculated L70 = 66000 hrs, L70 = 55000 for HE+]  
Tested with AKISW-\*\*-30-DRY-STD

	1.5HE W/FT		3.0HE W/FT		3.0HE+ W/FT		6.0HE W/FT		6.0HE+ W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	193	98	353	98	509	92	669	98	941	92
FR	187	98	342	98	493	92	648	98	912	92
PR	183	98	336	98	485	92	637	98	896	92
DF	167	98	306	98	442	92	580	98	816	92

[Calculated L70 = 66000 hrs, L70 = 55000 for HE+]  
Tested with AKISW-\*\*-30-DRY-WO

	1.5HE W/FT		3.0HE W/FT		3.0HE+ W/FT		6.0HE W/FT		6.0HE+ W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	200	98	366	98	528	92	694	98	977	92
FR	198	98	362	98	522	92	686	98	966	92
PR	191	98	350	98	505	92	663	98	933	92
DF	178	98	326	98	470	92	617	98	868	92

## 6 DIODE VISIBILITY

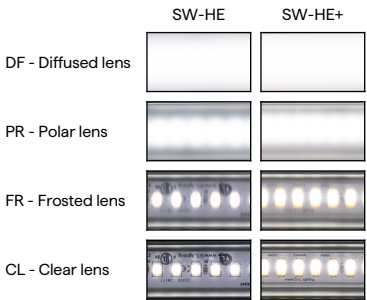




# ESSENTIALS ARKA-FLAT (01) SW-HE

24VDC Linear Fixtures - Corner & Surface

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




Clear 130°

## TEMPERATURE RATINGS

		1.5 HE W/FT		3.0 HE W/FT		3.0 HE+ W/FT		6.0 HE W/FT		6.0 HE+ W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	140°F	-13°F	140°F	-4°F	120°F	-13°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	135°F	**	**	-4°F	115°F	**	**
WET	Ambient Operating Temp - Surface	**	**	**	**	-13°F	135°F	**	**	-13°F	115°F


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


## CONFIGURATION OPTIONS




Single End Feed



Non-Continuous End Feed



Non-Continuous Corner Feed



Continuous End to End Feed




# ESSENTIALS ARKA-FLAT (01) SW-HE

24VDC Linear Fixtures - Corner & Surface

## 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

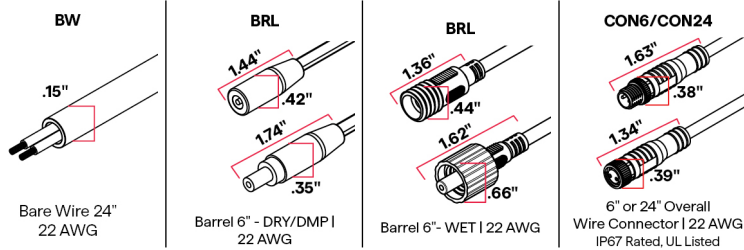


## 10 WIRE COLOR



## 12 MOUNTING

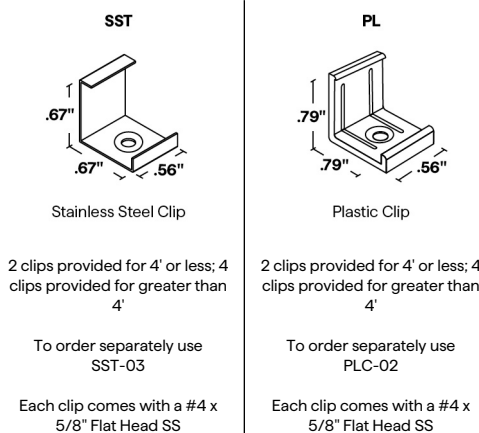

## 13 FINISH




Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

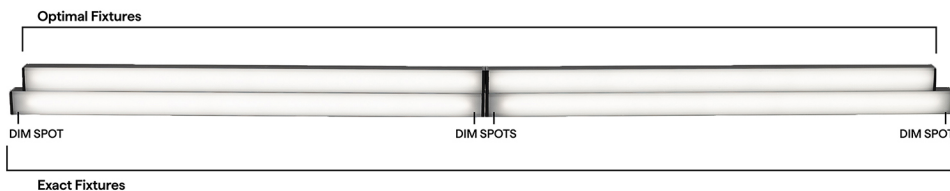




# ESSENTIALS ARKA-FLAT (01) SW-HE



24VDC Linear Fixtures - Corner & Surface

## SW-HE, SW-HE+ DRY DMP LENGTHS BY INCH

### EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH



Requested Nominal Length	S1	P1
		
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"

## SW-HE+ WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
		
12"	11.39"	11.24"
13"	12.39"	12.24"
14"	13.39"	13.24"
15"	14.39"	14.24"
16"	15.39"	15.24"
17"	16.39"	16.24"
18"	17.39"	17.24"
19"	18.39"	18.24"
20"	19.39"	19.24"
21"	20.39"	20.24"
22"	21.39"	21.24"
23"	22.39"	22.24"
24"	23.39"	23.24"
36"	35.39"	35.24"
48"	47.39"	47.24"
60"	59.39"	59.24"
72"	71.39"	71.24"
84"	83.39"	83.24"
96"	95.39"	95.24"



# ESSENTIALS ARKA-FLAT (01) SW-HE

24VDC Linear Fixtures - Corner & Surface

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	











DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	



# ESSENTIALS ARKA-FLAT (01) SW-HE

24VDC Linear Fixtures - Corner & Surface

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>	<b>HINGE - HMB-L</b>	<b>HINGE - HMB-XL</b>	<b>Q-PIVOT</b>	<b>Q-ANGLE</b>	<b>QUOVA-STANDARD</b>	<b>SD-J-LARGE</b>	<b>NL-LARGE</b>	<b>NJ-MEDIUM</b>	<b>SD-L-MEDIUM</b>
									
1.41" .71"	1.46" 1.29"	1.46" 4"	.75" 1.03"	2.23" 1.38"					
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	L Mounting Bracket	J Mounting Bracket	L Mounting Bracket