





# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Corner & Surface



410.2 & 410.16  
Closet Rated  
up to 4.0W/ft



- Corner and surface mount linear fixture with rounded lens
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Mounting options include stainless steel or plastic clip
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **AK1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

<div><div>1</div><div>PRODUCT</div><div>AK1SW AK1SW-USA</div><div>Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.</div><div>See following pages for compatible power supplies.</div></div>	<div><div>2</div><div>WATTS/FT</div><div><div>1.51.5W/ft 3.03.0W/ft 4.04.0W/ft 5.05.0W/ft</div><div>1.51.5W/ft 3.03.0W/ft 4.04.0W/ft 5.05.0W/ft</div></div></div>	<div><div>3</div><div>CCT</div><div><div>202000K 222200K 242400K 272700K 303000K 353500K 404000K</div><div>242400K 272700K 303000K 353500K 404000K</div></div></div>	<div><div>4</div><div>RATED</div><div><div>DRYIP20 WETIP67</div><div>Can be suitable for exterior use, contact factory for more information</div><div>DMPIP54</div></div></div>	<div><div>5</div><div>EFFICIENCY</div><div><div>STDStandard WOWhite Optics</div><div>WhiteOptics - Internal coating, greater lumen output</div></div></div>	<div><div>6</div><div>LENS</div><div><div>DFDiffused PRPolar FRFrosted CLClear</div><div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div></div></div>
<div><div>7</div><div>WIRE INPUT/OUTPUT</div><div><div>SINGLE (Input only) S1End Feed</div><div>PASS THROUGH (Input/output) P1End Feed</div></div></div>	<div><div>8</div><div>CONNECTOR/WIRE IN</div><div><div>BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24"</div><div>BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24"</div></div></div>	<div><div>9</div><div>CONNECTOR/WIRE OUT</div><div><div>CLSClosed End (No feed)</div><div>BWBare Wire (Standard 24") BRLBarrel CON6Connector 6" CON24Connector 24"</div></div></div>	<div><div>10</div><div>WIRE COLOR</div><div><div>WHWhite BKBlack N/AFOR Barrel</div><div>wet barrel only available in black</div></div></div>		
<div><div>11</div><div>WIRE TYPE</div><div><div>CL2Class 2 CL2PPlenum Rated N/AFOR Barrel</div><div>CL2P only available with bare wire leads (BW)</div></div></div>	<div><div>12</div><div>MOUNTING</div><div><div>SSTStainless Steel PLPlastic Clip</div></div></div>	<div><div>13</div><div>FINISH</div><div><div>STSatin BKBlack BZBronze CUCustom</div><div>Custom finishes require a longer lead time, consult factory</div></div></div>	<div><div>14</div><div>LENGTH (IN)</div><div><div>Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".</div></div></div>	<div><div>15</div><div>EXACT/OPTIMAL</div><div><div>OOptimal Illumination EExact Specified Length</div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.</div></div></div>	

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface


## 1 PRODUCT - DIMENSIONS



Profile



Profile with stainless steel mounting clip



Profile with plastic mounting clip

## 2 DELIVERED LUMENS


[Calculated L70 = 70000 hrs]  
Tested with AKISW-\*\*-30-DRY-STD

	1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	163	98	284	98	353	98	431	98
FR	161	98	280	98	348	98	426	98
PR	147	98	257	98	320	98	391	98
DF	136	98	238	98	295	98	361	98

[Calculated L70 = 70000 hrs]  
Tested with AKISW-\*\*-30-DRY-WO

	1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
CL	166	98	289	98	359	98	437	98
FR	163	98	284	98	353	98	429	98
PR	156	98	272	98	338	98	411	98
DF	147	98	257	98	319	98	388	98

## 6 DIODE VISIBILITY






# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

## 24VDC Linear Fixtures - Corner & Surface

### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




Clear 130°

### TEMPERATURE RATINGS


		1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	135°F	-4°F	130°F	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	130°F	-4°F	125°F	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	135°F	-4°F	130°F	-4°F	125°F	-4°F	120°F

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)



### CONFIGURATION OPTIONS

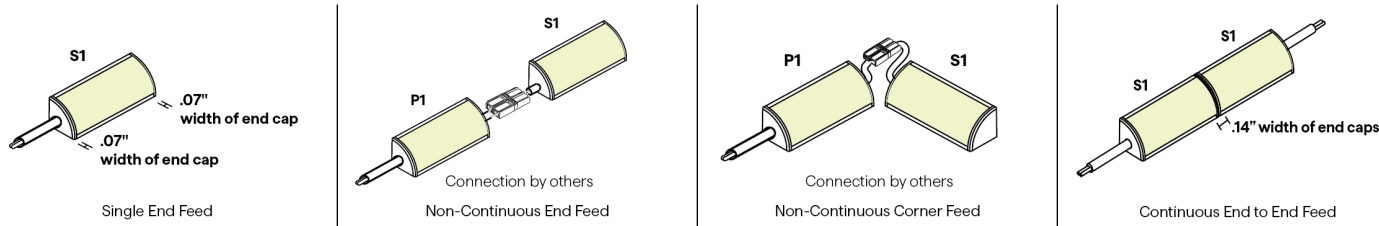




# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

## 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

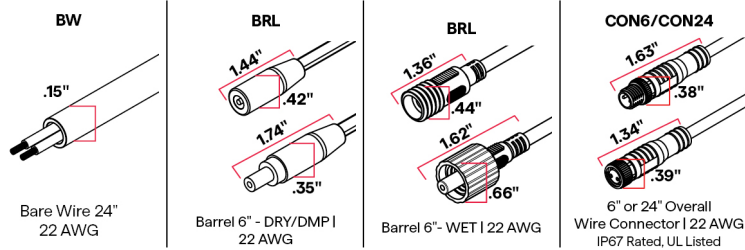


## 10 WIRE COLOR



## 12 MOUNTING

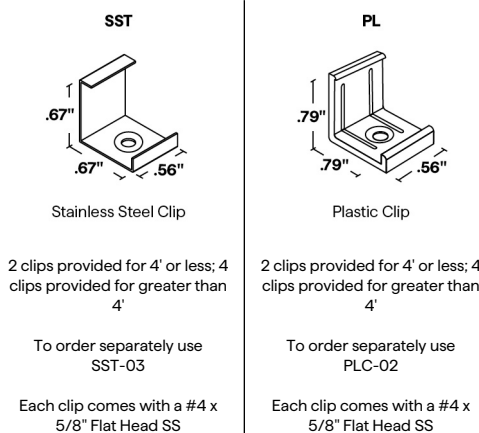

## 13 FINISH




Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

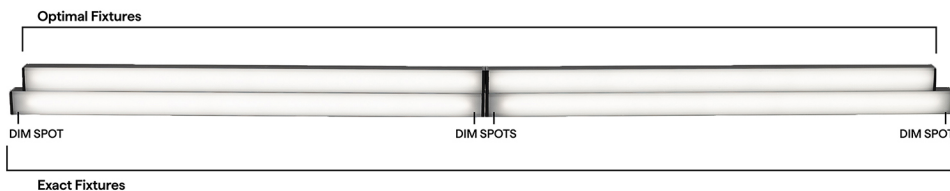




# ESSENTIALS ARKA-FLAT (01) STATIC WHITE



24VDC Linear Fixtures - Corner & Surface

## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH



Requested Nominal Length	S1	P1
		
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"

## SW WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
		
12"	11.44"	11.29"
13"	12.44"	12.29"
14"	13.44"	13.29"
15"	14.44"	14.29"
16"	15.44"	15.29"
17"	16.44"	16.29"
18"	17.44"	17.29"
19"	18.44"	18.29"
20"	19.44"	19.29"
21"	20.44"	20.29"
22"	21.44"	21.29"
23"	22.44"	22.29"
24"	23.44"	23.29"
36"	35.44"	35.29"
48"	47.44"	47.29"
60"	59.44"	59.29"
72"	71.44"	71.29"
84"	83.44"	83.29"
96"	95.44"	95.29"



# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	













# ESSENTIALS ARKA-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Corner & Surface

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  4" 1.46" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>QUOVA-STANDARD</b>  QUOVA Knife Edge	<b>SD-J-LARGE</b>  J Mounting Bracket	<b>NL-LARGE</b>  L Mounting Bracket	<b>NJ-MEDIUM</b>  J Mounting Bracket	<b>SD-L-MEDIUM</b>  L Mounting Bracket
--	--	---	--	--	--	---	--	---	---