





ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed



- Recessed flanged fixture designed for dryall and millwork installations
- Choose from diffused, polar, or frosted lens options
- Mounting options include spring or magnet mounting clips
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information



410.2 & 410.16
Closet Rated
up to 4.0W/ft



INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
				STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **EB1SW-5.0-30-DRY-STD-DF-P1-BW-BK-CL2-SP-ST-48"-E**

1	PRODUCT	2	WATTS/FT	3	CCT	4	RATED	5	EFFICIENCY	6	LENS																																						
	EB1SW EB1SW-USA Select USA option for BAA and BABA projects. Only DRY or WET ratings apply. See following pages for compatible power supplies.		<table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr></table>	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft		<table><tr><td>20</td><td>2000K</td></tr><tr><td>22</td><td>2200K</td></tr><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	20	2000K	22	2200K	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K		<table><tr><td>DRY</td><td>IP20</td></tr><tr><td>WET</td><td>IP67</td></tr><tr><td colspan="2">Can be suitable for exterior use, contact factory for more information</td></tr></table>	DRY	IP20	WET	IP67	Can be suitable for exterior use, contact factory for more information			<table><tr><td>STD</td><td>Standard</td></tr></table>	STD	Standard		<table><tr><td>DF</td><td>Diffused</td></tr><tr><td>PR</td><td>Polar</td></tr><tr><td>FR</td><td>Frosted</td></tr><tr><td colspan="2">For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</td></tr></table>	DF	Diffused	PR	Polar	FR	Frosted	For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	
1.5	1.5W/ft																																																
3.0	3.0W/ft																																																
4.0	4.0W/ft																																																
5.0	5.0W/ft																																																
20	2000K																																																
22	2200K																																																
24	2400K																																																
27	2700K																																																
30	3000K																																																
35	3500K																																																
40	4000K																																																
DRY	IP20																																																
WET	IP67																																																
Can be suitable for exterior use, contact factory for more information																																																	
STD	Standard																																																
DF	Diffused																																																
PR	Polar																																																
FR	Frosted																																																
For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages																																																	
			<table><tr><td>1.5</td><td>1.5W/ft</td></tr><tr><td>3.0</td><td>3.0W/ft</td></tr><tr><td>4.0</td><td>4.0W/ft</td></tr><tr><td>5.0</td><td>5.0W/ft</td></tr></table>	1.5	1.5W/ft	3.0	3.0W/ft	4.0	4.0W/ft	5.0	5.0W/ft		<table><tr><td>24</td><td>2400K</td></tr><tr><td>27</td><td>2700K</td></tr><tr><td>30</td><td>3000K</td></tr><tr><td>35</td><td>3500K</td></tr><tr><td>40</td><td>4000K</td></tr></table>	24	2400K	27	2700K	30	3000K	35	3500K	40	4000K		<table><tr><td>DMP</td><td>IP54</td></tr></table>	DMP	IP54																						
1.5	1.5W/ft																																																
3.0	3.0W/ft																																																
4.0	4.0W/ft																																																
5.0	5.0W/ft																																																
24	2400K																																																
27	2700K																																																
30	3000K																																																
35	3500K																																																
40	4000K																																																
DMP	IP54																																																

7	WIRE INPUT/OUTPUT	8	CONNECTOR/WIRE IN	9	CONNECTOR/WIRE OUT	10	WIRE COLOR
SINGLE (Input only) S1 End Feed S2 Bottom Feed		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"		CLS Closed End (No feed)		WH White BK Black N/A For Barrel wet barrel only available in black	
PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"		BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"			

For continuous mounting, consider bottom feed.

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


11	WIRE TYPE	12	MOUNTING	13	FINISH	14	LENGTH (IN)	15	EXACT/OPTIMAL
	CL2 Class 2 CL2P Plenum Rated N/A For Barrel CL2P only available with bare wire leads (BW)		SP Spring Clip MG Magnet		ST Satin CU Custom Custom finishes require a longer lead time, consult factory		Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".		O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.




ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed


1 PRODUCT - DIMENSIONS



Profile with flat lens



Profile with flat lens and magnet mounting clip



Profile with flat lens and spring mounting clip




Spring mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with EB1SW-**-30-DRY-STD

	1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	123	98	214	98	266	98	324	98
PR	107	98	186	98	231	98	282	98
DF	91	98	158	98	196	98	239	98

6 DIODE VISIBILITY



TEMPERATURE RATINGS

		1.5 W/FT		3.0 W/FT		4.0 W/FT		5.0 W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	130°F	-4°F	120°F	-4°F	110°F
DMP	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F
WET	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	125°F	-4°F	115°F	-4°F	105°F




ESSENTIALS EMBD-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Recessed

7 WIRE INPUT/OUTPUT






SINGLE (Input only)

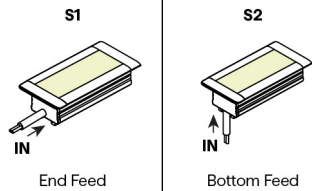

PASS THROUGH (Input/Output)




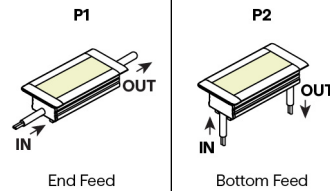


CONFIGURATION OPTIONS



8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR





ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

12 MOUNTING

SP



Spring Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SP-01


MG



Magnet Clip

One MG provided per foot
To order separately use
MG-02

MMA-02



Magnet Mount
Accessory for MG-02

Sold separately, to order use
MMA-02

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface

13 FINISH



Satin


Custom finishes require a longer
lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

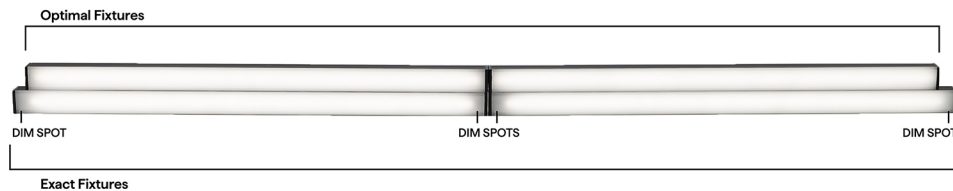

SW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1 End Feed
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	



ESSENTIALS EMBD-FLAT (01) STATIC WHITE





24VDC Linear Fixtures - Recessed

SW WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	 S1 End Feed	 S2 Bottom Feed	 P1 End Feed	 P2 Bottom Feed
12"	11.56"		11.71"	
13"	12.56"		12.71"	
14"	13.56"		13.71"	
15"	14.56"		14.71"	
16"	15.56"		15.71"	
17"	16.56"		16.71"	
18"	17.56"		17.71"	
19"	18.56"		18.71"	
20"	19.56"		19.71"	
21"	20.56"		20.71"	
22"	21.56"		21.71"	
23"	22.56"		22.71"	
24"	23.56"		23.71"	
36"	35.56"		35.71"	
48"	47.56"		47.71"	
60"	59.56"		59.71"	
72"	71.56"		71.71"	
84"	83.56"		83.71"	
96"	95.56"		95.71"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	




ESSENTIALS EMBD-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

MMA-02



Magnet Mount Accessory
of MG-02