





ESSENTIALS FLUR™-FLAT (01)

TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed



- Deep flanged recessed fixture
- Choose from diffused, polar, frosted, clear 45°, clear 60°, or clear 80° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS

ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
					SST			

Sample Part Number: **FL1DW-2.5HE-20/30-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT FL1DW FL1DW-USA Select USA option for BAA and BABA projects. Only DRY ratings apply. LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	2 WATTS/FT 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K 24/30 2400K/3000K 27/40 2700K/4000K	4 RATED DRY IP20 DMP IP54	5 EFFICIENCY STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused PR Polar FR Frosted CL/45 Clear 45° CL/60 Clear 60° CL/80 Clear 80° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages			
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black	11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel	13 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

For continuous mounting, consider bottom feed.

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




ESSENTIALS FLUR™-FLAT (01) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS



Profile



Profile with stainless steel mounting clip and mounting tray

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with FL1DW-**-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
45	121	98	192	98	298	98
60	123	98	194	98	302	98
80	130	98	205	98	319	98
FR	118	98	186	98	289	98
PR	96	98	152	98	237	98
DF	71	98	113	98	175	98

[Calculated L70 = 70000 hrs]
Tested with FL1DW-**-30-DRY-WO

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
45	134	98	211	98	328	98
60	135	98	213	98	331	98
80	140	98	221	98	343	98
FR	131	98	206	98	321	98
PR	110	98	174	98	271	98
DF	85	98	134	98	208	98

6 DIODE VISIBILITY



DF - Diffused lens


PR - Polar lens

FR - Frosted lens

CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

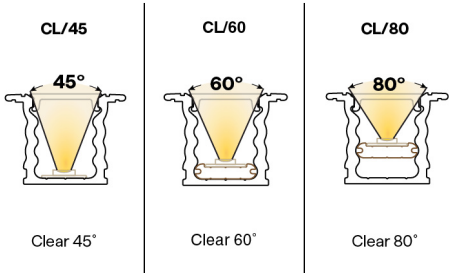



ESSENTIALS FLUR™-FLAT (01) TUNABLE APPLICATIONS


24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	140°F	-4°F	125°F	-4°F	130°F	-4°F	110°F	-4°F	120°F	-4°F	100°F
	Ambient Operating Temp - Surface	**	**	**	**	**	**	**	**	**	**	**	**
DMP	Ambient Operating Temp - Recessed	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	**	**	**	**
	Ambient Operating Temp - Surface	**	**	**	**	**	**	**	**	**	**	**	**

7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS

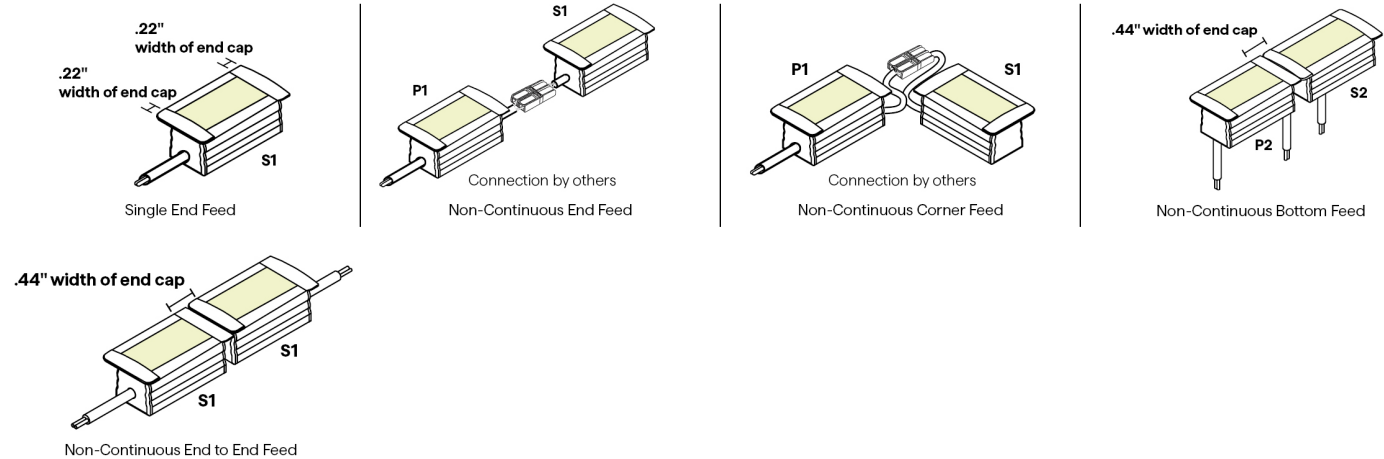




ESSENTIALS FLUR™-FLAT (01) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

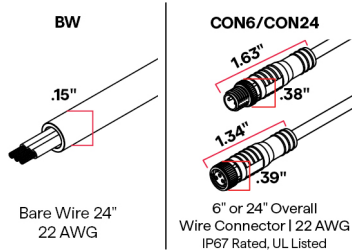

10 WIRE COLOR



12 MOUNTING



Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

13 FINISH



Custom finishes require a longer lead time, consult factory


Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

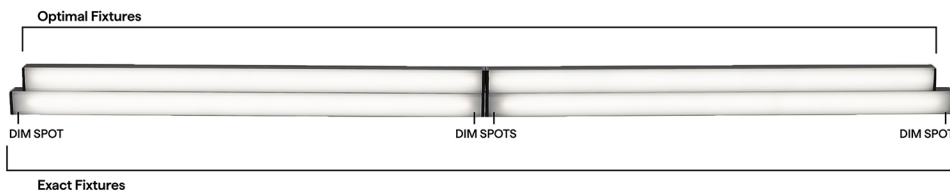



ESSENTIALS FLUR™-FLAT (01) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	 S1 End Feed	 S2 Bottom Feed	 P1 End Feed	 P2 Bottom Feed
12"		10.51"		10.86"
13"		12.51"		12.86"
14"		12.51"		12.86"
15"		14.51"		14.86"
16"		14.51"		14.86"
17"		16.51"		16.86"
18"		16.51"		16.86"
19"		18.51"		18.86"
20"		18.51"		18.86"
21"		20.51"		20.86"
22"		20.51"		20.86"
23"		22.51"		22.86"
24"		22.51"		22.86"
36"		34.51"		34.86"
48"		46.51"		46.86"
60"		58.51"		58.86"
72"		70.51"		70.86"
84"		82.51"		82.86"
96"		94.51"		94.86"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle




ESSENTIALS FLUR™-FLAT (01) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-M



1.41" .71"

Adjustable mounting bracket - Medium


HINGE - HMB-L



1.46" 1.29"

Adjustable mounting bracket - Large


HINGE - HMB-XL



1.46" 4"

Adjustable mounting bracket - XLarge


Q-PIVOT



.75" 1.03"

Small mounting accessory


Q-ANGLE



2.23" 1.38"

Adjustable mounting accessory

VHB



Double sided mounting tape