





# ESSENTIALS LATO-FLAT (01) RGB

24VDC Linear Fixtures - Recessed



- Shallow flanged recessed fixture
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Flanged design merges light source with surface
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2" cut point

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
LT1RGB	6.0	RGB			

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
					SST			

Sample Part Number: LT1RGB-6.0-RGB-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b> <b>LT1RGB</b> See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> 6.0 6.0W/ft	<b>3</b> <b>CCT</b> RGB	<b>4</b> <b>RATED</b> DRY IP20 DMP IP54	<b>5</b> <b>EFFICIENCY</b> STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b> DF Diffused PR Polar FR Frosted CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages			
<b>7</b> <b>WIRE INPUT/OUTPUT</b> <b>SINGLE (Input only)</b> S1 End Feed S2 Bottom Feed <b>PASS THROUGH (Input/output)</b> P1 End Feed P2 Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b> BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b> CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b> WH White BK Black	<b>11</b> <b>WIRE TYPE</b> CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b> SST Stainless Steel	<b>13</b> <b>FINISH</b> ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.

For continuous mounting, consider bottom feed.

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)




# ESSENTIALS LATO-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

## 1 PRODUCT - DIMENSIONS



Profile with flat lens



Profile with stainless steel mounting clip

## 2 DELIVERED LUMENS


[Calculated L70 = 55000 hrs]  
Tested with LT1RGB-6.0-RGB-DRY-STD

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	77	633	156	523	44	469	251
FR	77	633	156	523	44	469	250
PR	64	633	130	523	37	469	209
DF	61	633	123	523	35	469	198

[Calculated L70 = 55000 hrs]  
Tested with LT1RGB-6.0-RGB-DRY-WO

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	83	633	168	523	48	469	270
FR	83	633	167	523	47	469	268
PR	77	633	155	523	44	469	249
DF	66	633	133	523	38	469	213

## 6 DIODE VISIBILITY




- DF - Diffused lens
- PR - Polar lens
- FR - Frosted lens
- CL - Clear lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

CL



Clear 100°



# ESSENTIALS LATO-FLAT (01) RGB


24VDC Linear Fixtures - Recessed

## TEMPERATURE RATINGS


		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Recessed	-13°F	105°F
	Ambient Operating Temp - Surface	**	**
DMP	Ambient Operating Temp - Recessed	-13°F	100°F
	Ambient Operating Temp - Surface	**	**

## 7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




## CONFIGURATION OPTIONS

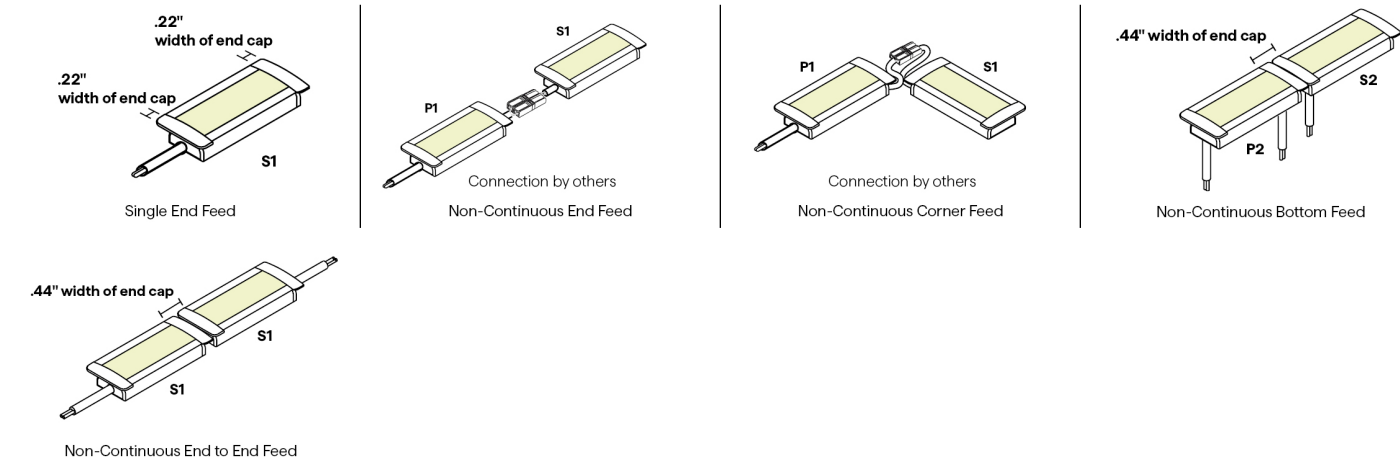


## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

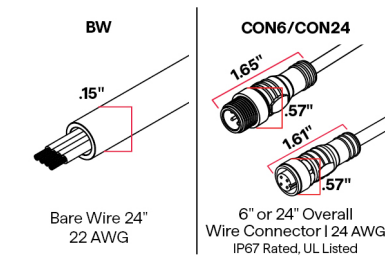

## 10 WIRE COLOR






# ESSENTIALS LATO-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

## 12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

## 13 FINISH




Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

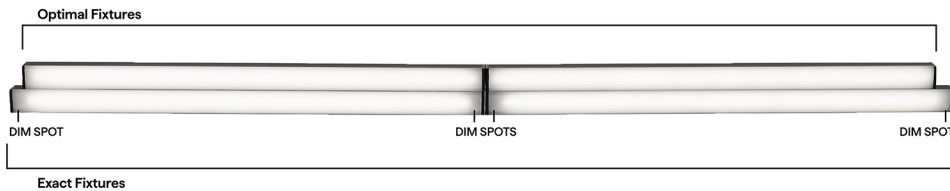



# ESSENTIALS LATO-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

## RGB DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
				
12"		10.51"		10.86"
13"		12.51"		12.86"
14"		12.51"		12.86"
15"		14.51"		14.86"
16"		14.51"		14.86"
17"		16.51"		16.86"
18"		16.51"		16.86"
19"		18.51"		18.86"
20"		18.51"		18.86"
21"		20.51"		20.86"
22"		20.51"		20.86"
23"		22.51"		22.86"
24"		22.51"		22.86"
36"		34.51"		34.86"
48"		46.51"		46.86"
60"		58.51"		58.86"
72"		70.51"		70.86"
84"		82.51"		82.86"
96"		94.51"		94.86"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle







DIMMING PROTOCOL	INDOOR
	RGB
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8




# ESSENTIALS LATO-FLAT (01) RGB

24VDC Linear Fixtures - Recessed

## COMPATIBLE MOUNTING ACCESSORIES




<b>HINGE - HMB-M</b>	<b>HINGE - HMB-L</b>	<b>HINGE - HMB-XL</b>	<b>Q-PIVOT</b>	<b>Q-ANGLE</b>	<b>VHB</b>
					
1.41" .71"	1.46" 1.29"	1.46" 4"	.75" 1.03"	2.23" 1.38"	
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	Double sided mounting tape

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

<b>SCENE APP DONGLE</b>	<b>IQ-DMX-STICK-GA2</b>	<b>IQ-DMX-STICK-DE3</b>
		
1.36" 2.58"		
Wi-Fi or Bluetooth Connectivity	DMX controller for changing color & dimming	DMX controller for changing color & dimming

## COMPATIBLE APPS



Read and write DMX addresses and adjust voltage