

ESSENTIALS LALO-FLAT (01) RGBW

24VDC Linear Fixtures - Surface & Recessed

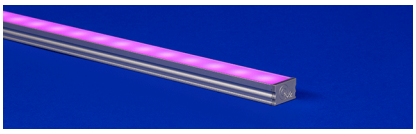



- Shallow, low-profile fixture for surface or recessed installations
- Choose from diffused, polar, or frosted lens options for varying diode visibility and beam angles
- Three mounting options
- Features painted end caps to match extrusion finish
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications
- Optional plastic louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
				STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **LL1RGBW-6.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT

LL1RGBW
See following pages for compatible power supplies.

LL1RGBW

2 WATTS/FT

6.0 6.0W/ft

4.0HE 4.0W/ft HE
8.0HE 8.0W/ft HE

4.0HE 4.0W/ft HE

3 CCT

27 RGBW-2700K
30 RGBW-3000K

27 RGBW-2700K
30 RGBW-3000K
35 RGBW-3500K
40 RGBW-4000K

27 RGBW-2700K
30 RGBW-3000K
35 RGBW-3500K
40 RGBW-4000K

4 RATED

DRY IP20
DMP IP54

DRY IP20

DMP IP54
WET IP67

Can be suitable for exterior use, contact factory for more information

5 EFFICIENCY

STD Standard

6 LENS

DF Diffused
PR Polar
FR Frosted

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed

For continuous mounting, consider bottom feed.

8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH White
BK Black

11 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

12 MOUNTING

SST Stainless Steel
M4 Low Profile Magnet
MG Magnet

13 FINISH

ST Satin
BK Black
CU Custom

Custom finishes require a longer lead time, consult factory

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26


ESSENTIALS LALO-FLAT (01) RGBW

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens




Profile with flat lens and stainless steel mounting clip




Profile with flat lens and magnet mounting clip




Profile with flat lens and low profile magnet




Profile with flat lens and plastic louver



Profile with flat lens, stainless steel mounting clip, and plastic louver



Profile with flat lens, magnet mounting clip, and plastic louver



Profile with flat lens, low profile magnet, and plastic louver

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with LL1RGBW-**-30-DRY-STD

	6.0 W/FT								4.0HE W/FT								8.0HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
FR	36	631	97	513	29	464	123	93	31	629	120	516	26	465	74	97	74	629	158	516	37	465	225	97
PR	33	631	87	513	26	464	111	93	28	629	108	516	23	465	67	97	67	629	142	516	33	465	204	97
DF	29	631	78	513	24	464	100	93	25	629	97	516	21	465	60	97	60	629	127	516	30	465	183	97

6 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



78°

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26

ESSENTIALS LALO-FLAT (01) RGBW


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

		6.0 W/FT		4.0 HE W/FT		8.0 HE W/FT	
		Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F	-4°F	105°F
DMP	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F	—	—
WET	Ambient Operating Temp - Surface	—	—	-4°F	120°F	—	—


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed | Bottom Feed

PASS THROUGH (Input/Output)




End Feed | Bottom Feed

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

ESSENTIALS LALO-FLAT (01) RGBW


24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY

PLASTIC

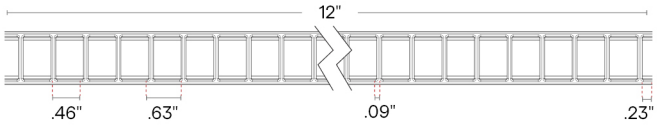


L1-XX



Lumen Multiplier

WH	BK
0.72	0.51




Profile with plastic louver

To order separately use LALO-L1-FLAT-KIT-WH or LALO-L1-FLAT-KIT-BK

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

MMA-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01




Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


ESSENTIALS LALO-FLAT (01) RGBW

24VDC Linear Fixtures - Surface & Recessed

14 EXACT/OPTIMAL FIXTURE LENGTH


E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.


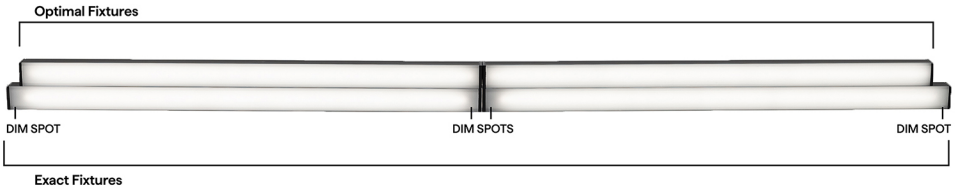


RGBW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 
12"	10.51"	10.86"
13"	12.51"	12.86"
14"	12.51"	12.86"
15"	14.51"	14.86"
16"	14.51"	14.86"
17"	16.51"	16.86"
18"	16.51"	16.86"
19"	18.51"	18.86"
20"	18.51"	18.86"
21"	20.51"	20.86"
22"	20.51"	20.86"
23"	22.51"	22.86"
24"	22.51"	22.86"
36"	34.51"	34.86"
48"	46.51"	46.86"
60"	58.51"	58.86"
72"	70.51"	70.86"
84"	82.51"	82.86"
96"	94.51"	94.86"


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

ESSENTIALS LALO-FLAT (01) RGBW



24VDC Linear Fixtures - Surface & Recessed

RGBW-HE WET LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH



Requested Nominal Length	S1 & S2 	P1 & P2 
12"	10.66"	11.06"
13"	12.66"	11.06"
14"	12.66"	13.06"
15"	14.66"	13.06"
16"	14.66"	15.06"
17"	16.66"	15.06"
18"	16.66"	17.06"
19"	18.66"	17.06"
20"	18.66"	19.06"
21"	20.66"	19.06"
22"	20.66"	21.06"
23"	22.66"	21.06"
24"	22.66"	23.06"
36"	34.66"	35.06"
48"	46.66"	47.06"
60"	58.66"	59.06"
72"	70.66"	71.06"
84"	82.66"	83.06"
96"	94.66"	95.06"

RGBW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 
12"	8.51"	8.86"
13"	12.51"	12.86"
14"	12.51"	12.86"
15"	12.51"	12.86"
16"	12.51"	12.86"
17"	16.51"	16.86"
18"	16.51"	16.86"
19"	16.51"	16.86"
20"	16.51"	16.86"
21"	20.51"	20.86"
22"	20.51"	20.86"
23"	20.51"	20.86"
24"	20.51"	20.86"
36"	32.51"	32.86"
48"	44.51"	44.86"
60"	56.51"	56.86"
72"	68.51"	68.86"
84"	80.51"	80.86"
96"	92.51"	92.86"

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS LALO-FLAT (01) RGBW

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DALI-DT8-PS QOM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT




Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

QUOVA-STANDARD



QUOVA Knife Edge

VHB



Double sided mounting tape

NJ-MEDIUM




J Mounting Bracket

SD-L-MEDIUM




L Mounting Bracket

MMA-01



Magnet Mount Accessory of MG-01


MMA-04



Magnet Mount Accessory of MG-04

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS LALO-FLAT (01) RGBW

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

iQ-DMX-STICK-GA2



DMX controller for changing color & dimming

iQ-DMX-STICK-DE3



DMX controller for changing color & dimming

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting