

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed

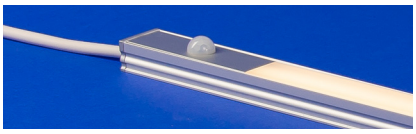



- Shallow, low-profile fixture for surface or recessed installations
- Choose from diffused, polar, or frosted lens options for varying diode visibility and beam angles
- Flanged design merges light source with surface
- Built-in occupancy sensor
- Detects movement up to 10' away and switches off after no movement is detected for 30 seconds
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, Blue or Amber LEDs available
- Q-Tran Red & Amber LED products are Florida Fish and Wildlife Conservation Commission certified, making them safe for turtles and other wildlife

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
LL1SC-OC	5.0		DRY	STD	

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **LL1SC-OC-5.0-GR-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT

LL1SC-OC

See following pages for compatible power supplies.

2 WATTS/FT

5.0	5.0W/ft

3 CCT

A	Amber
B	Blue
G	Green
R	Red

4 RATED

DRY	IP20

5 EFFICIENCY

STD	Standard

6 LENS

DF	Diffused
PR	Polar
FR	Frosted

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

S1	End Feed
S2	Bottom Feed

PASS THROUGH (Input/output)

P1	End Feed
P2	Bottom Feed

For continuous mounting, consider bottom feed.

8 CONNECTOR/WIRE IN

BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS	Closed End (No feed)

BW	Bare Wire (Standard 24")
BRL	Barrel
CON6	Connector 6"
CON24	Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH	White
BK	Black
N/A	For Barrel

wet barrel only available in black

11 WIRE TYPE

CL2	Class 2
CL2P	Plenum Rated
N/A	For Barrel

CL2P only available with bare wire leads (BW)

12 MOUNTING

SST	Stainless Steel
M4	Low Profile Magnet
MG	Magnet

13 FINISH

ST	Satin
BK	Black
CU	Custom

Custom finishes require a longer lead time, consult factory

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O	Optimal Illumination
E	Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

Motion: Auto on | No Motion: 30 second time out | Occupancy Sensor not programmable | Do not install with dimmer | 5 year warranty | Warranty only valid with QTL non-dimming power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with flat lens



Profile with flat lens, occupancy sensor and stainless steel mounting clip



Profile with flat lens, occupancy sensor, and magnet mounting clip




Profile with flat lens, occupancy sensor, and low profile magnet

2 DELIVERED LUMENS

[Calculated L70 = 30000 hrs]
Tested with LL1SC-5.0-**-DRY-STD


	Red		Green		Blue		Amber	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH
FR	82	633	443	517	115	466	74	597
PR	74	633	399	517	103	466	67	597
DF	66	633	358	517	93	466	60	597

6 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



78°

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

	5.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-4°F	115°F
Storage Temp	-4°F	140°F
Install Temp	50°F	100°F


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed | Bottom Feed

PASS THROUGH (Input/Output)




End Feed | Bottom Feed

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others

Non-Continuous Corner Feed




Continuous Bottom Feed




Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24" 22 AWG



Barrel 6" - DRY/DMP | 22 AWG




Barrel 6"- WET | 22 AWG



6" or 24" Overall Wire Connector | 22 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

MMA-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01




Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



Satin


Black

Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

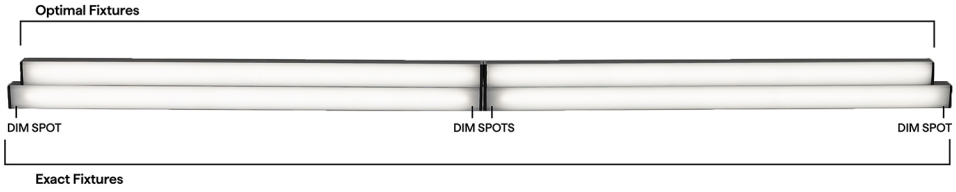


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTLlighting

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC



24VDC Linear Fixtures - Surface & Recessed

SC DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed / Bottom Feed	P1 & P2  End Feed / Bottom Feed
12"	10.41"	10.66"
13"	12.41"	12.66"
14"	12.41"	12.66"
15"	14.41"	14.66"
16"	14.41"	14.66"
17"	16.41"	16.66"
18"	16.41"	16.66"
19"	18.41"	18.66"
20"	18.41"	18.66"
21"	20.41"	20.66"
22"	20.41"	20.66"
23"	22.41"	22.66"
24"	22.41"	22.66"
36"	34.41"	34.66"
48"	46.41"	46.66"
60"	58.41"	58.66"
72"	70.41"	70.66"
84"	82.41"	82.66"
96"	94.41"	94.66"


COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QTM-eLED-ND QZ-ND


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT




Small mounting accessory

Q-ANGLE



Adjustable mounting accessory

QUOVA-STANDARD



QUOVA Knife Edge

VHB



Double sided mounting tape

NJ-MEDIUM




J Mounting Bracket

SD-L-MEDIUM




L Mounting Bracket

MMA-01



Magnet Mount Accessory of MG-01

MMA-04



Magnet Mount Accessory of MG-04

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS LALO-FLAT-OCCUPANCY (01) SC

24VDC Linear Fixtures - Surface & Recessed


COMPATIBLE WIRING ACCESSORIES

Q-mini-J



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

BARREL-EXT



8ft barrel cable extender DRY ONLY

BARREL FOUR-FER



Splits lead from one to four LED Barrel connector fixtures, DRY/DMP

CON120-EXT



10ft Con cable extender DRY/DMP/WET

CON FOUR-FER



Splits lead from one to four LED Con connectors DRY/DMP/WET

CON M - BARREL F



Male con to barrel cable adaptor DRY/DMP


COMPATIBLE APPS

NFC APP

Q-NFC


Read and write DMX addresses and adjust voltage

OCCUPANCY SENSOR (OC)

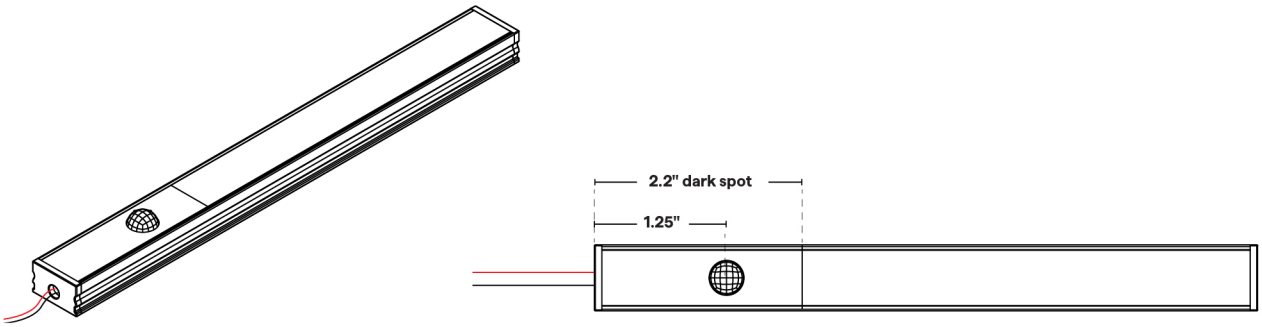


- **Motion based on/off functionality**
- **30 sec. on/off time without motion**
- **24VDC**
- **3A max / 72W**
- **Use with non-dimming driver**
- **Detection Range: up to 10'**

COVERAGE AREA



Side View



Top View

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26