

ESSENTIALS TORQ-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

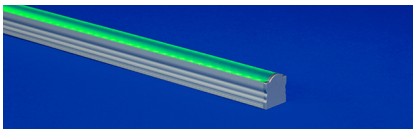



- Surface mount linear fixture for grazing
- Choose from a 12° or 40° beam angle
- Mounting tray available
- Features all wire feed options
- Ideal for direct and indirect applications
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2" cut point
- Optional plastic louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
TQ2RGB	6.0	RGB			

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: **TQ2RGB-6.0-RGB-DRY-WO-12-P1-BW-BW-BK-CL2-SST-BK-48"-E**

1 PRODUCT

TQ2RGB

See following pages for compatible power supplies.

2 WATTS/FT

6.0 6.0W/ft

3 CCT

RGB

4 RATED

DRY IP20
DMP IP54

5 EFFICIENCY

STD Standard
WO White Optics

WhiteOptics - Internal coating, greater lumen output

6 LENS

12 Optical 12°
40 Optical 40° DRY or DMP only

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages For optional snap-on louver ordering, see External Louver Accessory section on following pages

7 WIRE INPUT/OUTPUT

SINGLE (Input only)
S1 End Feed
S2 Bottom Feed
S3 Left Side Feed
S4 Right Side Feed

PASS THROUGH (Input/output)
P1 End Feed
P2 Bottom Feed
P3 Left Side Feed
P4 Right Side Feed

For continuous mounting, consider bottom or side feed

8 CONNECTOR/WIRE IN

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9 CONNECTOR/WIRE OUT

CLS Closed End (No feed)

BW Bare Wire (Standard 24")
CON6 Connector 6"
CON24 Connector 24"

BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10 WIRE COLOR

WH White
BK Black

11 WIRE TYPE

CL2 Class 2
CL2P Plenum Rated

CL2P only available with bare wire leads (BW)

12 MOUNTING

SST Stainless Steel
M4 Low Profile Magnet
MG Magnet

13 FINISH

ST Satin
BK Black
BZ Bronze
CU Custom

Custom finishes require a longer lead time, consult factory

14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

15 EXACT/OPTIMAL

O Optimal Illumination
E Exact Specified Length

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


ESSENTIALS TORQ-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile with optical lens




Profile with optical lens, stainless steel mounting clip, and mounting tray




Profile with optical lens and magnet mounting clip




Profile with optical lens and low profile magnet




Profile with plastic louver



Profile with optical lens, stainless steel mounting clip, and plastic louver



Profile with optical lens, magnet mounting clip, and plastic louver



Profile with optical lens, low profile magnet, and plastic louver

2 DELIVERED LUMENS


[Calculated L70 = 55000 hrs]
Tested with TQ2RGB-6.0-RGB-DRY-STD

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT
12	72	633	145	523	41	469	234
40	90	633	182	523	51	469	292

[Calculated L70 = 55000 hrs]
Tested with TQ2RGB-6.0-RGB-DRY-WO

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT
12	75	633	152	523	43	469	243
40	94	633	190	523	54	469	305

6 DIODE VISIBILITY




Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

12DEG



Optical 12°

40DEG



Optical 40°
DRY and DMP rated LEDS only

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS TORQ-OPTICS (02) RGB


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	110°F
DMP	Ambient Operating Temp - Surface	-13°F	110°F


7 WIRE INPUT/OUTPUT

SINGLE (Input only)

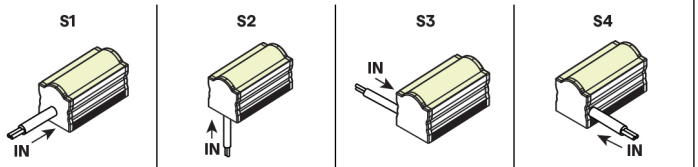


End Feed | Bottom Feed | Side Feed - Left | Side Feed - Right

PASS THROUGH (Input/Output)

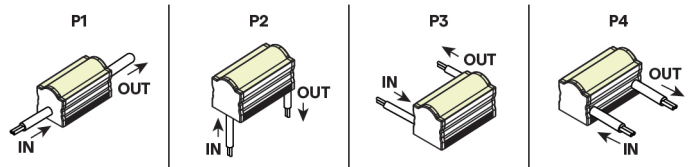


End Feed | Bottom Feed | Side Feed - Left | Side Feed - Right

CONFIGURATION OPTIONS




Single End Feed




Connection by others

Non-Continuous End Feed




Connection by others


Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left




Continuous Side Feed - Right



Continuous End to End Feed

8/9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out




Bare Wire 24"
22 AWG



6" or 24" Overall
Wire Connector | 24 AWG
IP67 Rated, UL Listed

10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26


ESSENTIALS TORQ-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed


EXTERNAL LOUVER ACCESSORY

When using 40DEG option with a side feed input/output, routing will be necessary on the plastic louver to ensure unobstructed wire exits.

PLASTIC

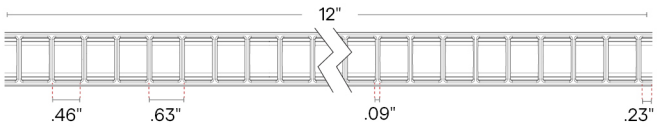


L1-XX



Lumen Multiplier

WH	BK
0.74	0.57




Profile with plastic louver

To order separately use TORQ-L1-OPTICS-KIT-WH or TORQ-L1-OPTICS-KIT-BK

12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use MG-04

MMA-04




Magnet Mount Accessory for M4

Sold separately, to order use MMA-04

Each bracket comes with 2 #6 x 5/8 Flat Head SS

Required when mounting to a non-magnetic surface

MG




Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01



Magnet Mount Accessory of MG-01

Sold separately, to order use MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

13 FINISH



Satin

Black

Bronze

Custom finishes require a longer lead time, consult factory

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


ESSENTIALS TORQ-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator → E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

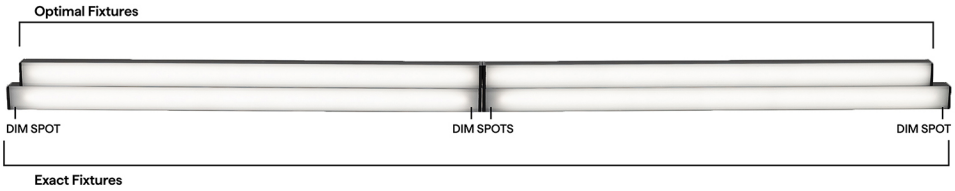

RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1 / IN / End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1 / IN	S2 / IN	P1 / OUT / IN	P2 / IN / OUT	S3 / IN	S4 / IN	P3 / IN / OUT	P4 / IN / OUT
	End Feed	Bottom Feed	End Feed	Bottom Feed	Side Feed - Left	Side Feed - Right	Side Feed - Left	Side Feed - Right
12"	10.51"		10.86"		10.41"		10.51"	
13"	12.51"		12.86"		12.41"		12.51"	
14"	12.51"		12.86"		12.41"		12.51"	
15"	14.51"		14.86"		14.41"		14.51"	
16"	14.51"		14.86"		14.41"		14.51"	
17"	16.51"		16.86"		16.41"		16.51"	
18"	16.51"		16.86"		16.41"		16.51"	
19"	18.51"		18.86"		18.41"		18.51"	
20"	18.51"		18.86"		18.41"		18.51"	
21"	20.51"		20.86"		20.41"		20.51"	
22"	20.51"		20.86"		20.41"		20.51"	
23"	22.51"		22.86"		22.41"		22.51"	
24"	22.51"		22.86"		22.41"		22.51"	
36"	34.51"		34.86"		34.41"		34.51"	
48"	46.51"		46.86"		46.41"		46.51"	
60"	58.51"		58.86"		58.41"		58.51"	
72"	70.51"		70.86"		70.41"		70.51"	
84"	82.51"		82.86"		82.41"		82.51"	
96"	94.51"		94.86"		94.41"		94.51"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

ESSENTIALS TORQ-OPTICS (02) RGB

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	RGB
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8


COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M



Adjustable mounting bracket - Medium

HINGE - HMB-L



Adjustable mounting bracket - Large

HINGE - HMB-XL



Adjustable mounting bracket - XLarge

Q-PIVOT



Small mounting accessory

Q-ANGLE




Adjustable mounting accessory

NU-GRAZER




U Mounting Bracket

NJ-GRAZER



J Mounting Bracket

BL-GRAZER




Backwards L Mounting Bracket

NJ-MEDIUM




J Mounting Bracket

MMA-01



Magnet Mount Accessory of MG-01


MMA-04



Magnet Mount Accessory of MG-04

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting