# ESSENTIALS TRE3-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface


410.2 & 410.16 Closet Rated up to 4.0W/ft

1-BIN 1-STEP SW/SW-HE ONLY

5 YEAR WARRANTY

SW, SW-HE ONLY






- Linear fixture designed for surface mount and grid ceiling applications
- Diffused lens
- Three-sided illumination
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information

**INFORMATION REQUIRED FOR LIGHTING SCHEDULE**

| 1 PRODUCT | 2 WATTS/ FT | 3 CCT | 4 RATED | 5 EFFICIENCY | 6 LENS |
|---|---|---|---|---|---|
| | | | | STD | DF |

**ADDITIONAL INFORMATION REQUIRED TO ORDER**

| 7 WIRE INPUT/ OUTPUT | 8 CONNECTOR/ WIRE IN | 9 CONNECTOR/ WIRE OUT | 10 WIRE COLOR | 11 WIRE TYPE | 12 MOUNTING | 13 FINISH | 14 LENGTH (IN) | 15 EXACT/ OPTIMAL |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |

Sample Part Number: **TR1SW-5.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-HSS-ST-48"-E**

## 1 PRODUCT

**TR1SW**
**TR1SW-USA**

Select USA option for BAA and BABA projects. SW and SW-HE only. Only DRY or WET ratings apply.

See following pages for compatible power supplies.

## 2 WATTS/FT

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |
| **9.0HE** | 9.0W/ft HE |

| | |
|---|---|
| **3.0HE+** | 3.0W/ft HE+ |
| **6.0HE+** | 6.0W/ft HE+ |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |
| **1.5HE** | 1.5W/ft HE |
| **3.0HE** | 3.0W/ft HE |
| **6.0HE** | 6.0W/ft HE |

| | |
|---|---|
| **1.5** | 1.5W/ft |
| **3.0** | 3.0W/ft |
| **4.0** | 4.0W/ft |
| **5.0** | 5.0W/ft |

## 3 CCT

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

| | |
|---|---|
| **18** | 1800K |
| **20** | 2000K |
| **22** | 2200K |
| **24** | 2400K |
| **27** | 2700K |
| **30** | 3000K |
| **35** | 3500K |
| **40** | 4000K |

## 4 RATED

| | |
|---|---|
| **DRY** | IP20 |

| | |
|---|---|
| **DMP** | IP54 |

| | |
|---|---|
| **WET** | IP67 |

Can be suitable for exterior use, contact factory for more information

## 5 EFFICIENCY

| | |
|---|---|
| **STD** | Standard |

## 6 LENS

| | |
|---|---|
| **DF** | Diffused |

For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

## 7 WIRE INPUT/OUTPUT

**SINGLE (Input only)**

| | |
|---|---|
| **S1** | End Feed |
| **S2** | Bottom Feed |

**PASS THROUGH (Input/output)**

| | |
|---|---|
| **P1** | End Feed |
| **P2** | Bottom Feed |

For continuous mounting, consider bottom feed
When using TBC Mounting, a bare wire S2 wire feed is recommended.
See install instructions for details.

## 8 CONNECTOR/WIRE IN

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 24", Max length is 120".
Request custom length by writing in part number next to BW (example: BW48)

## 9 CONNECTOR/WIRE OUT

| | |
|---|---|
| **CLS** | Closed End (No feed) |

| | |
|---|---|
| **BW** | Bare Wire (Standard 24") |
| **BRL** | Barrel |
| **CON6** | Connector 6" |
| **CON24** | Connector 24" |

BW: Standard length is 24", Max length is 120".
Request custom length by writing in part number next to BW (example: BW48)

## 10 WIRE COLOR

| | |
|---|---|
| **WH** | White |
| **BK** | Black |
| **N/A** | For Barrel |

wet barrel only available in black

## 11 WIRE TYPE

| | |
|---|---|
| **CL2** | Class 2 |
| **CL2P** | Plenum Rated |
| **N/A** | For Barrel |

CL2P only available with bare wire leads (BW)

## 12 MOUNTING

| | |
|---|---|
| **HSS** | Hidden Stainless Steel Clip |
| **TBC-01** | 9/16" Flat or Tegular TB-Grid |
| **TBC-02** | 15/16" Flat or Tegular TB-Grid |

## 13 FINISH

| | |
|---|---|
| **ST** | Satin |
| **CU** | Custom |

Custom finishes require a longer lead time, consult factory

## 14 LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".

## 15 EXACT/OPTIMAL

| | |
|---|---|
| **O** | Optimal Illumination |
| **E** | Exact Specified Length |

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTLlighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


# ESSENTIALS TRE3-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface


## 1 PRODUCT - DIMENSIONS





Profile




Profile with hidden stainless steel mounting clip




Profile with TBC-01





Profile with TBC-02

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 50000 for HE+]
Tested with TR1SW-**-30-DRY-STD

| | 1.5 W/FT | | 1.5HE W/FT | | 3.0 W/FT | | 3.0HE W/FT | | 3.0HE+ W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0HE W/FT | | 6.0HE+ W/FT | | 9.0HEW/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| DF | 130 | 98 | 162 | 98 | 227 | 98 | 297 | 98 | 429 | 92 | 282 | 98 | 343 | 98 | 563 | 98 | 792 | 92 | 879 | 98 |


## 6 DIODE VISIBILITY




## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

**DF**




Diffused 136°

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-10-05-26

# ESSENTIALS TRE3-FLAT (01) STATIC WHITE


24VDC Linear Fixtures - Surface

## TEMPERATURE RATINGS

| | | 1.5 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 3.0 HE+ W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 6.0 HE+ W/FT | | 9.0 HE W/FT | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -13°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | -13°F | 120°F | -4°F | 100°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | — | — | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | — | — | — | — |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 125°F | — | — | — | — | -4°F | 120°F | -4°F | 115°F | — | — | — | — | — | — |


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)





End Feed | Bottom Feed

PASS THROUGH (Input/Output)





End Feed | Bottom Feed

## CONFIGURATION OPTIONS





Single End Feed





Connection by others

Non-Continuous End Feed





Connection by others

Non-Continuous Corner Feed





Continuous Bottom Feed





Continuous End to End Feed

## 8/9 CONNECTOR/WIRE – IN/OUT


Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out





Bare Wire 24"
22 AWG




Barrel 6" - DRY/DMP | 22 AWG





Barrel 6"- WET | 22 AWG




6" or 24" Overall
Wire Connector | 22 AWG
IP67 Rated, UL Listed

## 10 WIRE COLOR



White

Black

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-10-05-26

# ESSENTIALS TRE3-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

## 12 MOUNTING

**HSS**





Hidden Stainless Steel Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SST-02

Each clip comes with a #4 x 5/8" Flat Head SS

**TBC-01**




Plastic T-Bar Clip


Use on 9/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-01

Each pair of clips comes with M2.5 x 4mm

**TBC-02**




Plastic T-Bar Clip

Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-02

## 13 FINISH


Satin

Custom finishes require a longer lead time, consult factory

## 14 EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →  E/O Explained →

Exact fixtures are the exact length specified +0 -1/8". Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

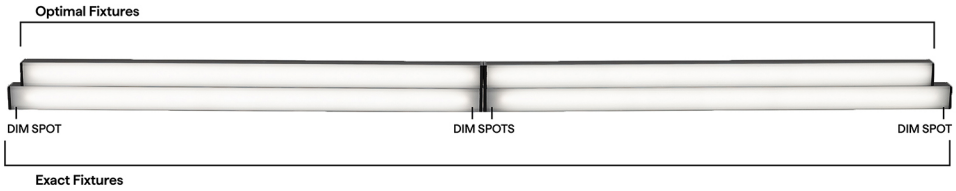



© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# ESSENTIALS TRE3-FLAT (01) STATIC WHITE



24VDC Linear Fixtures - Surface

## SW DRY DMP LENGTHS BY INCH

### EXACT LENGTH


| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

### OPTIMAL LENGTH



| Requested Nominal Length | S1 & S2   | P1 & P2   |
|---|---|---|
| 12" | 11.41" | 11.66" |
| 13" | 12.41" | 12.66" |
| 14" | 13.41" | 13.66" |
| 15" | 14.41" | 14.66" |
| 16" | 15.41" | 15.66" |
| 17" | 16.41" | 16.66" |
| 18" | 17.41" | 17.66" |
| 19" | 18.41" | 18.66" |
| 20" | 19.41" | 19.66" |
| 21" | 20.41" | 20.66" |
| 22" | 21.41" | 21.66" |
| 23" | 22.41" | 22.66" |
| 24" | 23.41" | 23.66" |
| 36" | 35.41" | 35.66" |
| 48" | 47.41" | 47.66" |
| 60" | 59.41" | 59.66" |
| 72" | 71.41" | 71.66" |
| 84" | 83.41" | 83.66" |
| 96" | 95.41" | 95.66" |

## SW WET LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 0.5" |
| 13" | 0.5" |
| 14" | 0.5" |
| 15" | 0.5" |
| 16" | 0.5" |
| 17" | 0.5" |
| 18" | 0.5" |
| 19" | 0.5" |
| 20" | 0.5" |
| 21" | 0.5" |
| 22" | 0.5" |
| 23" | 0.5" |
| 24" | 0.5" |
| 36" | 0.5" |
| 48" | 0.5" |
| 60" | 0.5" |
| 72" | 0.5" |
| 84" | 0.5" |
| 96" | 0.5" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   | P1 & P2   |
|---|---|---|
| 12" | 11.56" | 11.71" |
| 13" | 12.56" | 12.71" |
| 14" | 13.56" | 13.71" |
| 15" | 14.56" | 14.71" |
| 16" | 15.56" | 15.71" |
| 17" | 16.56" | 16.71" |
| 18" | 17.56" | 17.71" |
| 19" | 18.56" | 18.71" |
| 20" | 19.56" | 19.71" |
| 21" | 20.56" | 20.71" |
| 22" | 21.56" | 21.71" |
| 23" | 22.56" | 22.71" |
| 24" | 23.56" | 23.71" |
| 36" | 35.56" | 35.71" |
| 48" | 47.56" | 47.71" |
| 60" | 59.56" | 59.71" |
| 72" | 71.56" | 71.71" |
| 84" | 83.56" | 83.71" |
| 96" | 95.56" | 95.71" |


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# ESSENTIALS TRE3-FLAT (01) STATIC WHITE



24VDC Linear Fixtures - Surface

## SW-HE, SW-HE+ DRY DMP LENGTHS BY INCH

### EXACT LENGTH

| Requested Length | Potential dim spot on either end of a S1 fixture   |
|---|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

### OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2   End Feed / Bottom Feed | P1 & P2   End Feed / Bottom Feed |
|---|---|---|
| 12" | 10.41" | 10.66" |
| 13" | 12.41" | 12.66" |
| 14" | 12.41" | 12.66" |
| 15" | 14.41" | 14.66" |
| 16" | 14.41" | 14.66" |
| 17" | 16.41" | 16.66" |
| 18" | 16.41" | 16.66" |
| 19" | 18.41" | 18.66" |
| 20" | 18.41" | 18.66" |
| 21" | 20.41" | 20.66" |
| 22" | 20.41" | 20.66" |
| 23" | 22.41" | 22.66" |
| 24" | 22.41" | 22.66" |
| 36" | 34.41" | 34.66" |
| 48" | 46.41" | 46.66" |
| 60" | 58.41" | 58.66" |
| 72" | 70.41" | 70.66" |
| 84" | 82.41" | 82.66" |
| 96" | 94.41" | 94.66" |

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QTM-DC+CAP<br>iQ-PH+QD1 | QOM-DC+CAP<br>QOM-PH | QOM-DC+CAP<br>QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-BOWTIE+DIMMER<br>QZ-DMX<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V | Q-SET-QZ-DMX<br>Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QOM-eLED+DALI-DT6<br>QOM-eLED+DALI-DT6-PS<br>QZ-DMX<br>QZ-PRO-PH/0-10V |
| 1% | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-DIM<br>QTM-eLED(E)<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC<br>Q-SET-mLED | |

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

# ESSENTIALS TRE3-FLAT (01) STATIC WHITE

24VDC Linear Fixtures - Surface

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|---|---|---|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| **Non-Dim** | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | QT-CAB-eLED-ND<br>QTM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND | Q-SET-QZ-ND<br>Q-SET-eLED-ND<br>QOM-eLED-ND<br>QZ-ND |
| **Phase** | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q6M-DC+CAP<br>QT-CAB-QZ-PH/0-10V<br>QTM-DC+CAP<br>QTM-eLED(E)<br>QZ-BOWTIE+DIMMER<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP<br>iQ-PH+QD1 | Q-HEX-mini-DC<br>Q-SET-QZ-PH/0-10V<br>Q-SET-mLED<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>QOM-DC+CAP<br>QOM-PH<br>QZ-PRO-PH/0-10V |
| **0-10V** | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | QT-CAB-QZ-PH/0-10V<br>QT-CAB-eLED+0-10V<br>QT-CAB-eLED+0-10V-AWN<br>QTM-eLED+0-10V<br>QTM-eLED+0-10V-AWN<br>QZ-PRO-PH/0-10V<br>QZ-STICK-PH/0-10V<br>QZLP | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V | Q-SET-QZ-PH/0-10V<br>Q-SET-eLED+0-10V<br>QOM-eLED+0-10V<br>QZ-PRO-PH/0-10V |
| **Lutron Athena** | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+0-10V-AWN<br>QTM-eLED+DALI-DT6-AWN | | |
| **ECO System** | QTM-eLED(E) | QTM-eLED(E) | | |
| **DMX** | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX | Q-SET-QZ-DMX<br>QZ-DMX |
| **DALI-2: DT6** | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6<br>QT-CAB-eLED+DALI-DT6-AWN<br>QTM-eLED+DALI-DT6<br>QTM-eLED+DALI-DT6-AWN<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6<br>QOM-eLED+DALI-DT6<br>QZ-DALI-DT6 |
| **SCENE App Dimmed** | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |


## COMPATIBLE MOUNTING ACCESSORIES

**HINGE - HMB-M**




Adjustable mounting bracket - Medium

**HINGE - HMB-L**




Adjustable mounting bracket - Large

**HINGE - HMB-XL**




Adjustable mounting bracket - XLarge

**Q-PIVOT**




Small mounting accessory

**Q-ANGLE**




Adjustable mounting accessory

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting